



**we start
with precision.**

JUNHE PUMPS

Version: 04/2024

PUMPS



PRODUCT CATALOGUE

Until 2023, there are as many as 14 different series of pumps

JUNHE PUMPS HOLDING CO., LTD

Add: No. 1500, West Yinxian Rd, Haishu District, Ningbo, P.R. China

Tel: 86-574-88421066

Fax: 86-574-88422722, 88036639

Skype: Junhe Pumps

Email: Lynn@junhepumps.com



Q www.junhepumps.com



Company Profile

Contents

Established in 1999,we,Junhe Pumps Holding co.,Ltd.have been specialized in producing household pumps for more than 19 years. Our 1000 working staff and 116,000m² factory building are capable of running 4 million pieces of pumps each year, which significantly contributes us to be one of the top professional house hold water pump manufacturers here in China at the time being.

Currently, we have five main pump series, and more than 1000 single items are being manufactured in our company comply with GS, CE, EMC ,UL and CSA certificates 100%of our pumps are exported to Europe, North America, South America, Middle East and Oceania Markets, etc. Besides, we are very glad to tell you that our turnover in year 2017was USD125 million.

"Quality, Service and Reputation"are the principle of our enterprise culture." Reality,Innovation and Excellence"are our Junhe purpose.We are very confident to be your long term business partner on the basis of mutual benefit in line of household water pumps.

After all, If you are going to buy, why not buy from an expert? You 'll be glad you did.

producing household pumps

19↑ years


factory building

116↑ thousand m²

each year running pumps

4↑ million pieces

Submersible Pump	01-09		
Submersible Fountain Pump	01-09		
Garden Jet Pump	01-09		
Automatic Booster System	01-09		
Swimming Pool Pump	01-09		
Deep Well Pump	01-09	Vibration Pump	67-142
		Aluminum Submersible Pump	142-163
		Circulating pump	175-196
		Pump Accessories	196-204
		Latest Products	205-222

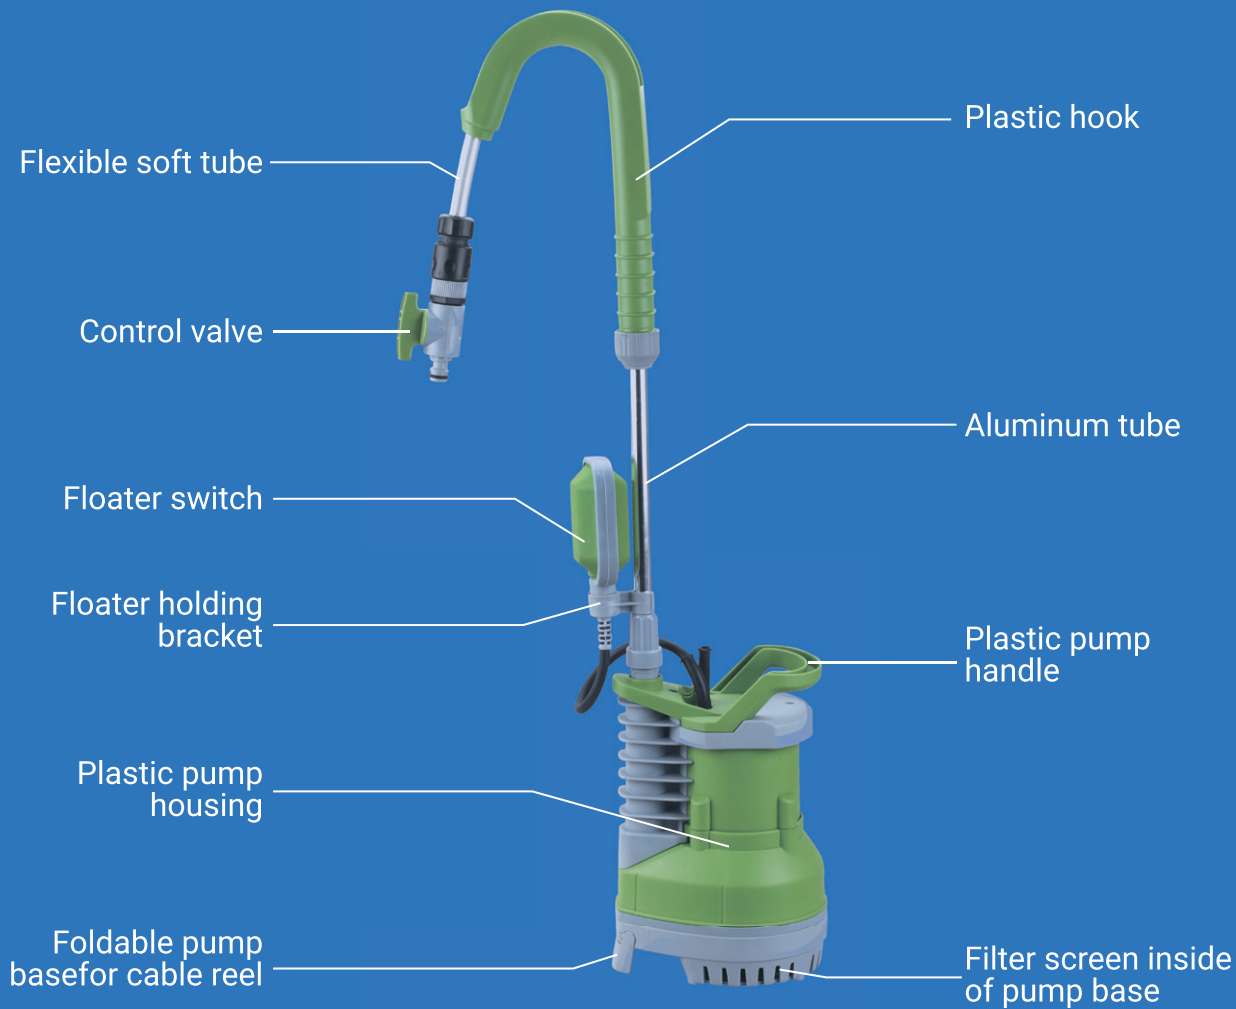

Submersible Pump

Plastic submersible rain water pump with flexible tube and floater switch for clean water.



QXXX118

Plastic submersible rain water pump with flexible tube and floater switch for clean water. This pump could be used for rain water application, in which you could put this pump into the wooden barrel or plastic water tank for water transferring or garden irrigation.



Specification

Junhe Model	Q250118	Q400118
Rated Power	250W	400W
Max.pump height	9m	11m
Max.pump rate	2500 l/h	4000 l/h
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe	G3/4"	G3/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Lowest pump starting level	85mm	85mm
Lowest pump sucking level	28mm	28mm
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x40cm	46x38x40cm
Master carton box gross weight	20.1kg	21.1kg
Qty/20'GP	1600pcs	1600pcs



Q550118-2P



Plastic submersible rain water pump with flexible tube and floater switch for clean water. This pump has 2 stage plastic impellers for which could reach max delivery height 20m.

Junhe Model	Q550118-2P
Rated Power	550W
Max.pump height	20m
Max.pump rate	5000 l/h
Max.pressure	2.0bar
Dia of connecting pipe	G3/4"
Cable specification	H05RN-F3G0.75mm ²
Lowest pump starting level	85mm
Lowest pump sucking level	28mm
Qty in carton box	4pcs
Master carton box size	46x38x40cm
Master carton box gross weight	26.5kg
Qty/20'GP	1600pcs

Plastic submersible rain water pump with flexible tube for clean water application, This pump has 2 stage plastic impellers for which could reach max delivery height 20m, This pump is equipped with built-in electrical control switch, which is of the function for no water shut down, pressure maintaining / restarting and leakage shut down.



Q550118A-2P

Junhe Model	Q550118A-2P
Rated Power	550W
Max.pump height	20m
Max.pump rate	5000 l/h
Max.pressure	2.0bar
Dia of connecting pipe	G3/4"
Cable specification	H05RN-F3G0.75mm ²
Lowest pump starting level	85mm
Lowest pump sucking level	28mm
Qty in carton box	4pcs
Master carton box size	46x38x40cm
Master carton box gross weight	26.5kg
Qty/20'GP	1600pcs



Q40027S-4

Submersible pump with plastic pump housing and floater switch for clean water application. On this model of pump, the shape of the base and the height of the main pump have been changed based on the original model so that a more compact structure and boundary dimension are achieved, This pump is equipped with a round floater switch which is more economical.




Junhe Model	Q40027S-4
Rated Power	400W
Vol & Fre.	230V/50Hz
Max.pump height	8.0m
Max.pump rate	8000 l/h
Max.submersible depth	7m
Max.grain size	5mm
Max.pressure	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm ²
Length of cable	10m
Lowest pump starting level	100mm
Lowest pump sucking level	5mm
Max.medium temperature	35 C
Qty in carton box	4pcs
Master carton box size	42x36x27cm
Master carton box gross weight	13.2kg
Qty/20'GP	2752pcs



QXXX67

Stainless steel submersible pump with adjustable pump handle and floater switch for clean water application, Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

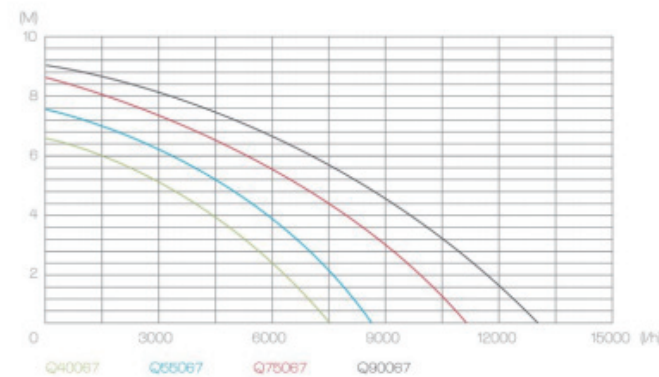

Specification

Junhe Model	Q40067	Q55067	Q75067	Q90067
Rated Power	400W	550W	750W	900W
Max.pump height	6.5m	7.5m	8.5m	9m
Max.pump rate	7500 l/h	8500 l/h	11000 l/h	13000 l/h
Max.pressure	0.65bar	0.75bar	0.85bar	0.9bar
Dia of connecting pipe	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"	1"G1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	100mm	100mm	100mm	100mm
Lowest pump sucking level	23mm	23mm	23mm	23mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x32cm	46x34x35cm	46x34x38cm	46x34x38cm
Master carton box gross weight	19.5kg	23.2kg	23.5kg	24kg
Qty/20'GP	2240pcs	2048pcs	1888pcs	1888pcs




Specification

Junhe Model	Q550B67	Q750B67	Q900B67	Q1100B67
Rated Power	550W	750W	900W	1100W
Max.pump height	7m	8m	9m	10.5m
Max.pump rate	1000 l/h	13000 l/h	14000 l/h	16500 l/h
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.8bar	0.9bar	1.05bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x43cm	46x38x43cm	46x38x45cm	46x38x45cm
Master carton box gross weight	24.4kg	26.5kg	28.3kg	30.8kg
Qty/20'GP	1500pcs	1500pcs	1420pcs	1420pcs



QXXXB67


Stainless steel submersible pump with adjustable pump handle and floater switch for dirty water application. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

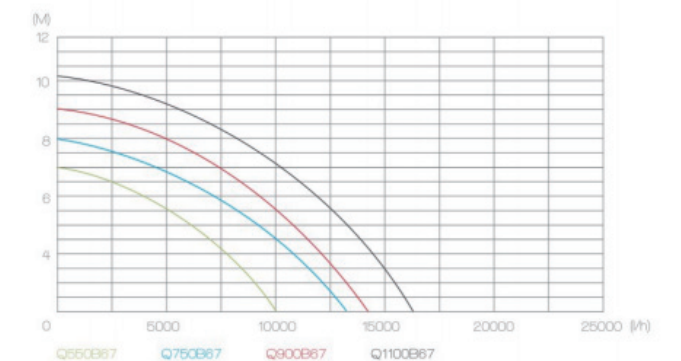



QXXX115

Plastic submersible pump with electronic aqua sensor for clean water. Water starting level could be adjustable; you could change to either manual control mode or automatic control mode when using the pump. This pump has the foldable pump handle, when stand up the pump handle, there will be a small step existing in the pump base area, which is perfect design for sucking the water in a very low level. This pump could start working even when water level is only 5mm, this pump also has the non-return valve which avoid water back flow.

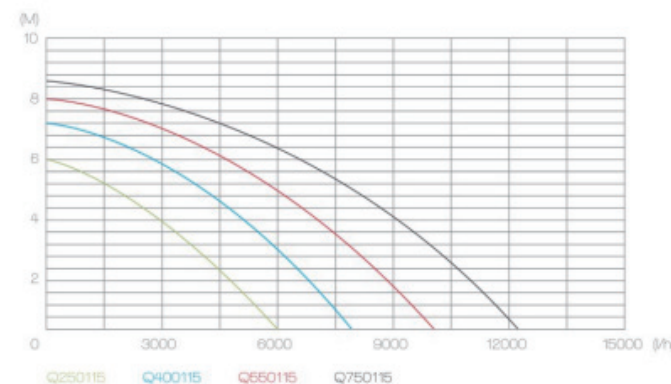

Specification

Junhe Model	Q250115	Q400115	Q550115	Q750115
Rated Power	250W	400W	550W	750W
Max.pump height	6m	7m	8m	8.5m
Max.pump rate	6000 l/h	8000 l/h	10000 l/h	12500 l/h
Max.pressure	0.6bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G0.75mm ²	H07RN-F3G0.75mm ²
Manua control lowest pump starting level	5mm	5mm	5mm	5mm
Manua control lowest pump sucking level	1mm	1mm	1mm	1mm
Automatic control start water level	50-140mm	50-140mm	50-140mm	50-140mm
Automatic control close water level	40-130mm	40-130mm	40-130mm	40-130mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	54x42x33cm	54x42x33cm	54x42x33cm	54x42x33cm
Master carton box gross weight	20kg	21kg	23kg	24kg
Qty/20'GP	1500pcs	1500pcs	1500pcs	1500pcs




Specification

Junhe Model	Q250115 INOX	Q400115 INOX	Q550115 INOX	Q750115 INOX
Rated Power	250W	400W	550W	750W
Max.pump height	6m	7m	8m	8.5m
Max.pump rate	6000 l/h	8000 l/h	10000 l/h	12500 l/h
Max.pressure	0.6bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Manua control lowest pump starting level	5mm	5mm	5mm	5mm
Manua control lowest pump sucking level	1mm	1mm	1mm	1mm
Automatic control start water level	50-140mm	50-140mm	50-140mm	50-140mm
Automatic control close water level	40-130mm	40-130mm	40-130mm	40-130mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	54x42x33cm	54x42x33cm	54x42x33cm	54x42x33cm
Master carton box gross weight	20kg	21kg	23kg	24kg
Qty/20'GP	1500pcs	1500pcs	1420pcs	1420pcs

Plastic submersible pump with stainless main pump body and electronic aqua sensor for clean water. Water starting level could be adjustable; you could change to either manual control mode or automatic control mode when using the pump. This pump has the foldable pump handle, when stand up the pump handle, there will be a small step existing in the pump base area, which is perfect design for sucking the water in a very low level. This pump could start working even when water level is only 5mm, this pump also has the non-return valve which avoid water back flow.




QXXX115 INOX

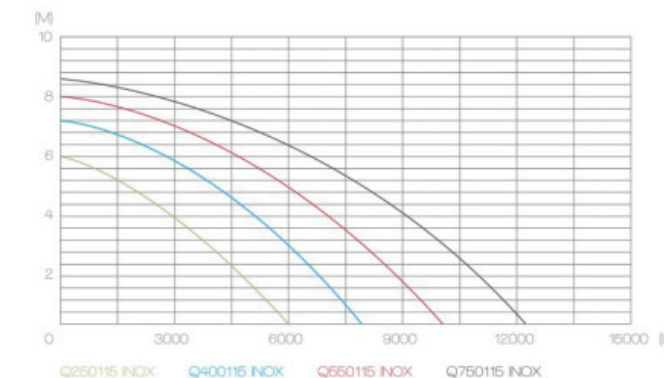



QXXX121

Plastic submersible pump with floater switch and top water discharge for clean water application. The floater switch is adjustable, it could fixed to any step of pump body, but please be attention that the floater switch should be upward when put this pump into the water, otherwise the pump couldn't work.

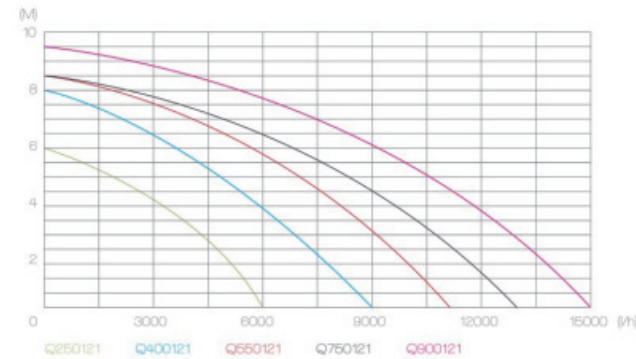

Specification

Junhe Model	Q250121	Q400121	Q550121	Q750121
Rated Power	250W	400W	550W	750W
Max.pump height	6m	8m	8.5m	8.5m
Max.pump rate	6000 l/h	9000 l/h	11000 l/h	13000 l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G0.75mm ²	H07RN-F3G0.75mm ²
Lowest pump starting level	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	48x38x36cm	48x38x36cm	48x38x36cm	48x38x36cm
Master carton box gross weight	18.3kg	18.9kg	20.5kg	21.5kg
Qty/20'GP	1708pcs	1708pcs	1708pcs	1708pcs


Specification

Junhe Model	Q400B121	Q550B121	Q750B121	Q900B121
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000 l/h	11500 l/h	13500 l/h	15500 l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	48x38x41cm	48x38x41cm	48x38x41cm	48x38x41cm
Master carton box gross weight	20.2kg	22.2kg	23.1kg	26kg
Qty/20'GP	1500pcs	1500pcs	1500pcs	1500pcs



QXXXB121

Plastic submersible pump with floater switch and top water discharge for dirty water application. The floater switch is adjustable, it could fixed to any step of pump body, but please be attention that the floater switch should be upward when put this pump into the water, otherwise the pump couldn't work.

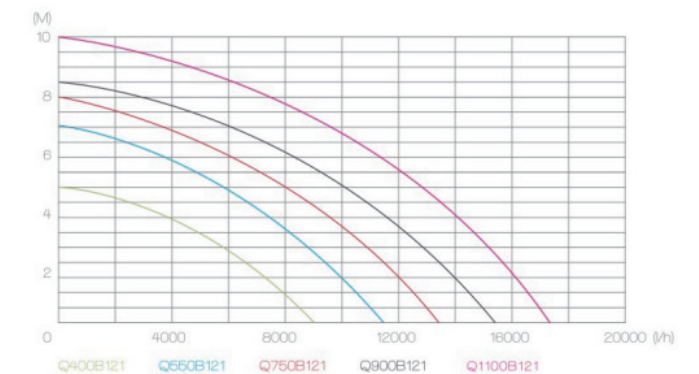




Specification

Junhe Model	Q250122	Q400122	Q550122	Q750122	Q900122
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	9000 l/h	11000 l/h	13000 l/h	15000 l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO7RN-F3G0.75mm ²	HO7RN-F3G0.75mm ²	HO7RN-F3G1.0mm ²
Manua control lowest pump starting level	60mm	60mm	60mm	60mm	60mm
Manua control lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Automatic control start water level	100-180mm	100-180mm	100-180mm	100-180mm	100-180mm
Automatic control close water level	60mm	60mm	60mm	60mm	60mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x33cm	50x38x33cm	50x38x33cm	50x38x33cm	50x38x33cm
Master carton box gross weight	18.7kg	19.2kg	22kg	22.2kg	26kg
Qty/20'GP	1788pcs	1788pcs	1788pcs	1788pcs	1788pcs



QXXX122


Plastic submersible pump with built-in float switch for clean water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

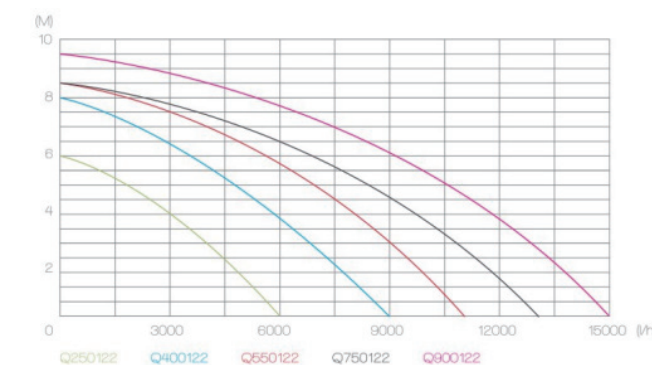



QXXXB122

Plastic submersible pump with built-in float switch for dirty water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

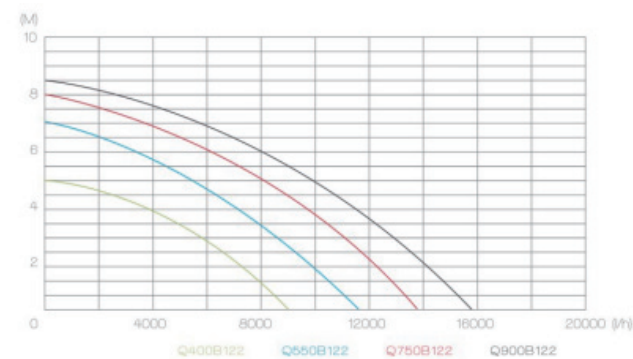

Specification

Junhe Model	Q400B122	Q550B122	Q750B122	Q900B122
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000 l/h	11500 l/h	13500 l/h	15500 l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x38.5cm	50x38x38.5cm	50x38x38.5cm	50x38x38.5cm
Master carton box gross weight	20.8kg	22.1kg	24.4kg	26.2kg
Qty/20'GP	1532pcs	1532pcs	1532pcs	1532pcs


Specification

Junhe Model	Q250123 INOX	Q400123 INOX	Q550123 INOX	Q750123 INOX	Q900123 INOX
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	9000 l/h	11000 l/h	13000 l/h	15000 l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x31cm	50x38x31cm	50x38x33cm	50x38x33cm	50x38x35cm
Master carton box gross weight	19.5kg	20kg	22.5kg	23.5kg	26.8kg
Qty/20'GP	1900pcs	1900pcs	1780pcs	1780pcs	1680pcs




QXXX123 INOX

Plastic submersible pump with stainless steel casing for the pump body and adjustable floater switch for clean water application. The stainless steel casing has many circles with purpose to present a dramatic design to our customers.

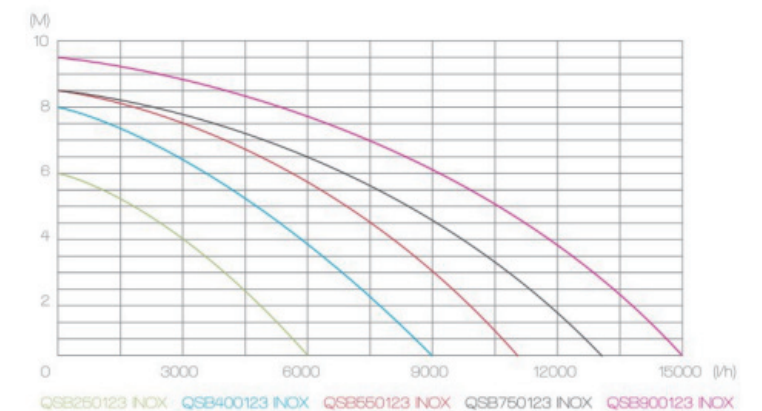



Plastic submersible pump with stainless steel casing for the pump body and adjustable floater switch for clean water application. The stainless steel casing has many circles with purpose to present a dramatic design to our customers.

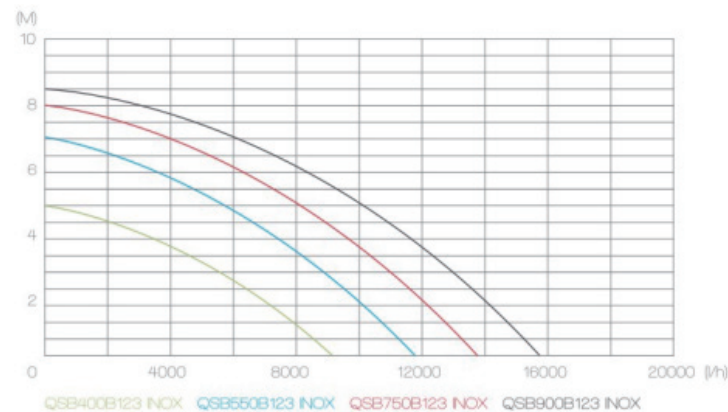

QXXXB123 INOX



Specification

Junhe Model	Q400B123 INOX	Q550B123 INOX	Q750B123 INOX	Q900B123 INOX
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000 l/h	11500 l/h	13500 l/h	15500 l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO7RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x36cm	50x38x38.5cm	50x38x38.5cm	50x38x38.5cm
Master carton box gross weight	20.8kg	23.6kg	23.7kg	27.4kg
Qty/20'GP	1640pcs	1532pcs	1532pcs	1532pcs


Specification

Junhe Model	Q250124	Q400124	Q550124	Q750124	Q900124
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x35cm	46x38x35cm	46x38x35cm	46x38x37cm	46x38x37cm
Master carton box gross weight	17.5kg	18.5kg	22.5kg	23.5kg	25.5kg
Qty/20'GP	1832pcs	1832pcs	1832pcs	1732pcs	1732pcs



QXXX124


Plastic submersible pump with adjustable pump handle and floater switch for clean water application. Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

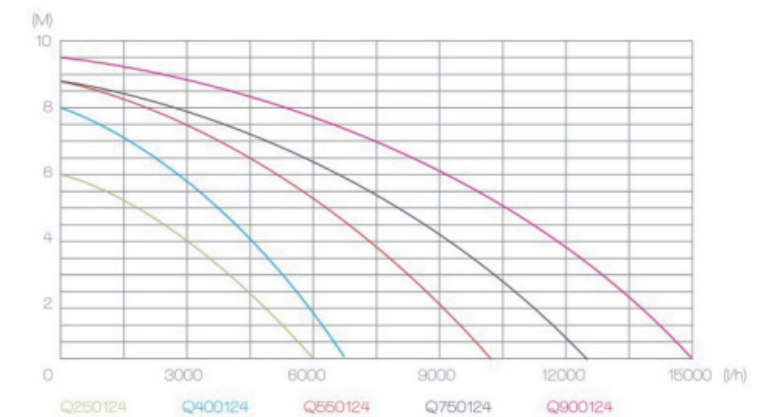



QXXXB124

Plastic submersible pump with adjustable pump handle and floater switch for dirty water application, Simple design, stable performance and high quality which makes this pump become the best selling second generation pump range in Junhe.

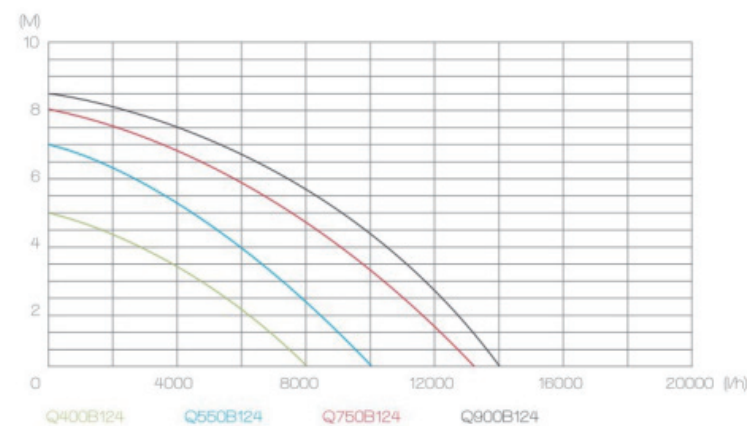

Plastic submersible pump with water level aqua sensor for clean water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

QXXX122A



Specification

Junhe Model	Q250122A	Q400122A	Q550122A	Q750122A	Q900122A
Rated Power	250W	400W	550W	750W	900W
Max.pump height	6m	8m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	9000 l/h	11000 l/h	13000 l/h	15000 l/h
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	100mm	100mm	100mm	100mm	100mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x33cm	50x38x33cm	50x38x33cm	50x38x33cm	50x38x33cm
Master carton box gross weight	18.7kg	19.2kg	22kg	22.2kg	26kg
Qty/20'GP	1788pcs	1788pcs	1788pcs	1788pcs	1788pcs

Plastic submersible pump with water level aqua sensor for dirty water application. This pump is equipped with both automatic control mode and manual control mode, you may adjust the switch in which mode that you want before using this pump.

QXXXB122A




Specification

Junhe Model	Q400B122A	Q550B122A	Q750B122A	Q900B122A
Rated Power	400W	550W	750W	900W
Max.pump height	5m	7m	8m	8.5m
Max.pump rate	9000 l/h	11500 l/h	13500 l/h	15500 l/h
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	120mm	120mm	120mm	120mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	50x38x30.5cm	50x38x30.5cm	50x38x33cm	50x38x33cm
Master carton box gross weight	19.5kg	20kg	22.5kg	23.5kg
Qty/20'GP	1930pcs	1930pcs	1780pcs	1780pcs



QXXXB142

Plastic submersible pump with floater switch and top water discharge for clean water or dirty water application. The floater switch could be adjusted up and down when under operation. The pump base has a position ring which shows 1mm to 23mm, the pump would be under clean water application mode when you take this pump out from the gift box. When you want to use this pump for dirty water application, you may pull the pump up and then rotate the position ring to 23mm.

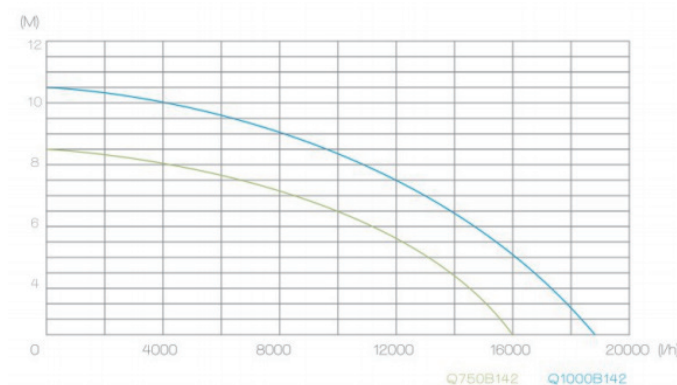

Specification

Junhe Model	Q750B142	Q1000B142
Rated Power	750W	1000W
Max.pump height	8.5m	10.5m
Max.pump rate	16000 l/h	18500 l/h
Max.pressure	0.85bar	1.05bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	25mm	25mm
Lowest pump sucking level	1mm	1mm
Qty in carton box	2pcs	2pcs
Master carton box size	46x28x38cm	46x28x38cm
Master carton box gross weight	14.3kg	16kg
Qty/20'GP	1144pcs	1144pcs




Specification

Junhe Model	Q750B142INOX	Q1000B142INOX
Rated Power	750W	1000W
Max.pump height	8.5m	10.5m
Max.pump rate	16000 l/h	18500 l/h
Max.pressure	0.85bar	1.05bar
Dia of connecting pipe	1"G1-1/4"G1-1/2"	1"G1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	25mm	25mm
Lowest pump sucking level	1mm	1mm
Qty in carton box	2pcs	2pcs
Master carton box size	46x28x38cm	46x28x38cm
Master carton box gross weight	14.8kg	16.5kg
Qty/20'GP	1144pcs	1144pcs



QXXXB142 INOX


Plastic submersible pump with stainless steel casing and floater switch and top water discharge for clean water or dirty water application. The floater switch could be adjusted up and down when under operation. The pump base has a position ring which shows 1mm to 23mm, the pump would be under clean water application mode when you take this pump out from the gift box, When you want to use this pump for dirty water application, you may pull the pump up and then rotate the position ring to 23mm.

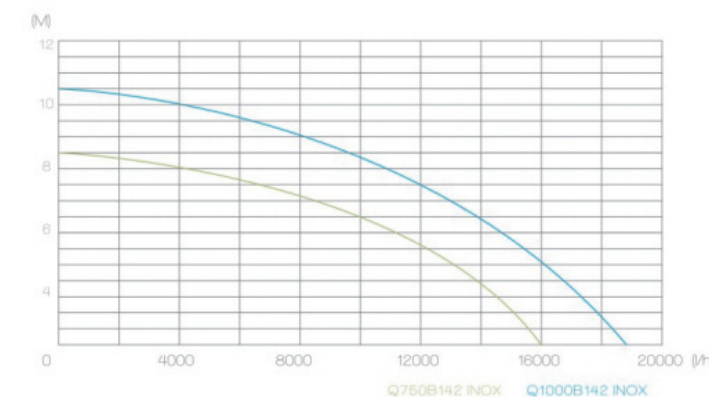



QXXX103-XP

Plastic multi-stage submersible pump with stainlesssteel casing and floater switch for clean water application.This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 30 or 40m.

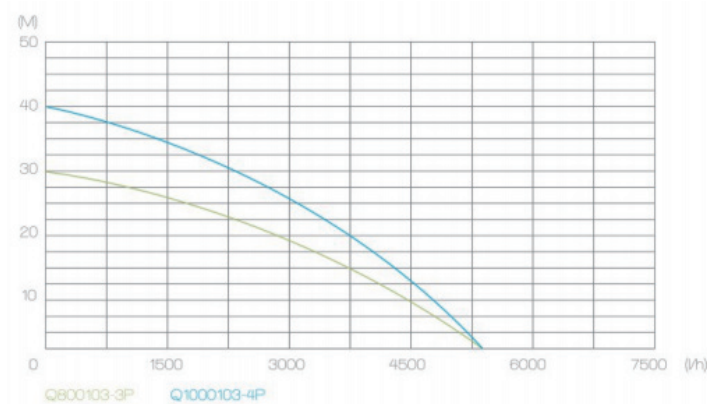

Specification

Junhe Model	Q800103-3P	Q1000103-4P
Rated Power	800W	1000W
Max.pump height	30m	40m
Max.pump rate	5500 l/h	5500 l/h
Max.pressure	3.0bar	4.0bar
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	40mm	40mm
Lowest pump sucking level	25mm	25mm
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x40cm	50x38x42cm
Master carton box gross weight	35.1kg	37.4kg
Qty/20'GP	1474pcs	1400pcs




Specification

Junhe Model	Q800127-3P	Q1000127-4P
Rated Power	800W	1000W
Max.pump height	30m	40m
Max.pump rate	6500 l/h	6500 l/h
Max.pressure	3.0bar	4.0bar
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	60mm	60mm
Lowest pump sucking level	50mm	50mm
Qty in carton box	2pcs	2pcs
Master carton box size	42x24x52cm	42x24x52cm
Master carton box gross weight	19.3kg	20.5kg
Qty/20'GP	1068pcs	1068pcs



QXXX127-XP


Plastic multi-stage submersible pump with stainlesssteel casing and floater switch for clean water application.This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 30 or 40m.

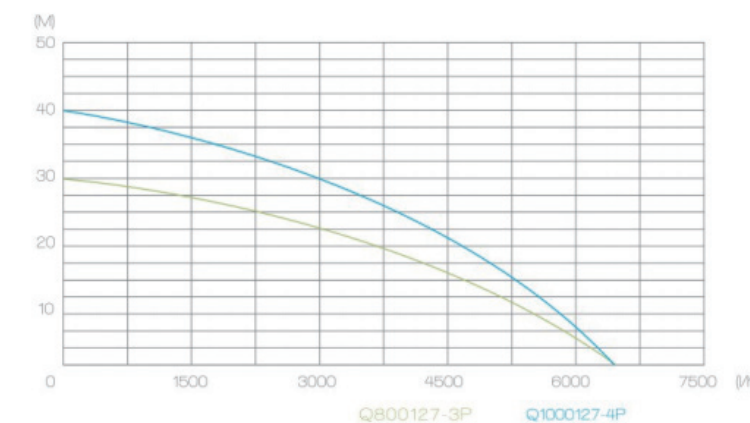



QXXX126A-XP

Plastic multi-stage submersible pump with stainlesssteel casing and built-in automatic pressure control switch for clean water application.This pump has 3 or 4 stage plastic impellers for which could reach max delivery height to 35 or 45m. The pump could reach to 12m for max submersible depth, it also has 15m power cable and 15m nylon rope.

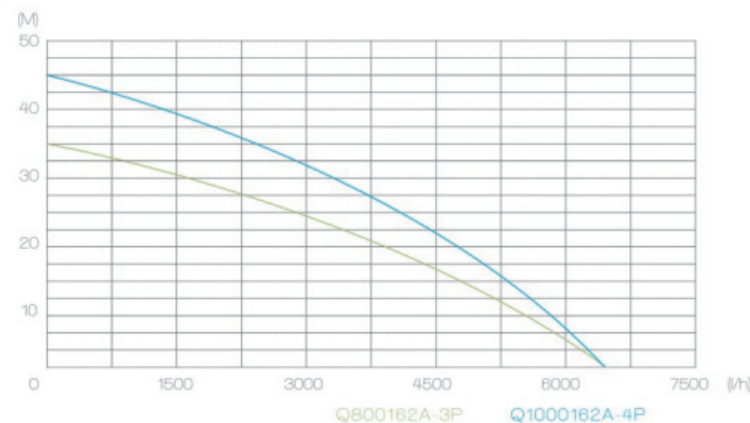

Specification

Junhe Model	Q800162A-3P	Q1000162A-4P
Rated Power	850W	1100W
Max.pump height	35m	45m
Max.pump rate	6000 l/h	6000 l/h
Max.pressure	3.5bar	4.5bar
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Lowest pump starting level	60mm	60mm
Lowest pump sucking level	50mm	50mm
Qty in carton box	2pcs	2pcs
Master carton box size	42x26x58cm	42x26x58cm
Master carton box gross weight	22.5kg	24.7kg
Qty/20'GP	884pcs	854pcs




Specification

Junhe Model	Q2006	Q2506
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000 l/h	4500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe	1G1"	1G1"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10mm	10mm
Lowest pump starting level	80mm	80mm
Lowest pump sucking level	2mm	2mm
Max.medium temperature	35°C	35°C
Qty in carton box	6pcs	6pcs
Master carton box size	51x34x28cm	51x34x28cm
Master carton box gross weight	19.7kg	20.2kg
Qty/20'GP	2310pcs	2310pcs



QXXX6


Submersible pump with plastic pump housing for clean water application. Best selling pump item in Southeast Asia.

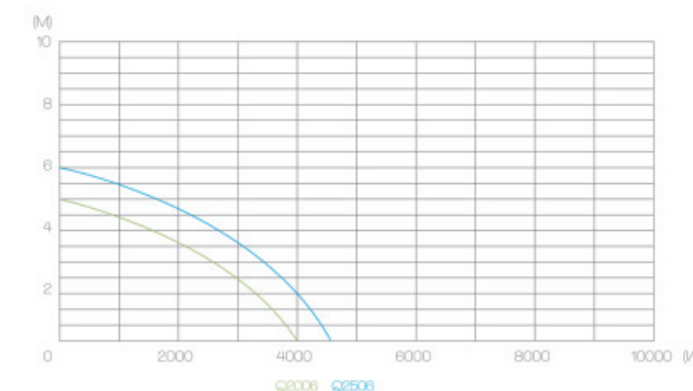



QXXX7

Submersible pump with plastic pump housing and floater switch for clean water application.

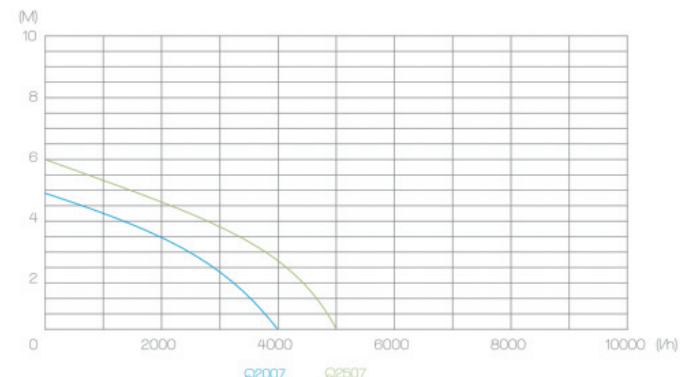

Specification

Junhe Model	Q2007	Q2507
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000 l/h	4500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe	1G1"	1G1"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10mm	10mm
Lowest pump starting level	80mm	80mm
Lowest pump sucking level	2mm	2mm
Max.medium temperature	35°C	35°C
Qty in carton box	6pcs	6pcs
Master carton box size	54x42x31cm	54x42x31cm
Master carton box gross weight	23.3kg	25kg
Qty/20'GP	2394pcs	2394pcs




Specification

Junhe Model	Q20033S	Q25033S
Rated Power	200W	250W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	5.0m	6.0m
Max.pump rate	4000 l/h	4500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.5bar	0.6bar
Dia of connecting pipe	1G1"	1G1"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10mm	10mm
Lowest pump starting level	80mm	80mm
Lowest pump sucking level	2mm	2mm
Max.medium temperature	35°C	35°C
Qty in carton box	6pcs	6pcs
Master carton box size	54x42x31cm	54x42x31cm
Master carton box gross weight	20.6kg	21.8kg
Qty/20'GP	2394pcs	2394pcs



QXXX33S

Submersible pump with plastic pump housing and floater switch for clean water application.

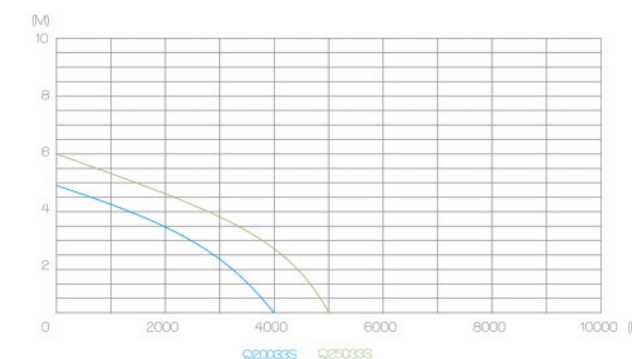




Specification

Junhe Model	Q2503A-1	Q4003A-1
Rated Power	250W	400W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.0m	7.0m
Max.pump rate	6000 l/h	7000 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.6bar	0.7bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Length of cable	10mm	10mm
Lowest pump starting level	5mm	5mm
Lowest pump sucking level	1mm	1mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x30cm	46x38x30cm
Master carton box gross weight	17.8kg	18.6kg
Qty/20'GP	2136pcs	2136pcs



QXXX3A-1


Plastic submersible pump equipped with electronic aqua sensor for clean water, water starting level could be adjustable, you could change to either manual control mode or automatic control mode when using the pump. This pump has the stainless steel pump base, the pump could keep working even in condition with water level at 5mm. The pump also has the non-return valve which could avoid water back flow.

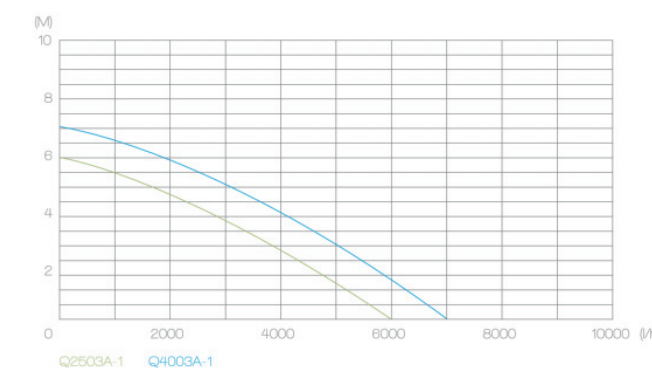



QXXX3A

Plastic submersible pump equipped with electronic aqua sensor for clean water, the starting water level could be adjustable. With automatic control mode, the pump would automatically stop working when couldn't suck the water.

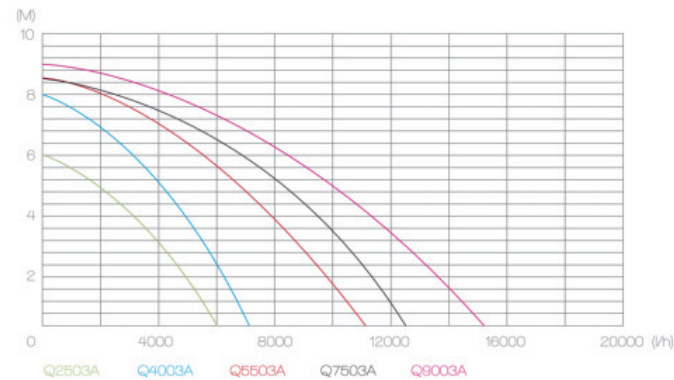

Specification

Junhe Model	Q2503A	Q4003A	Q5503A	Q7503A	Q9003A
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	120mm	120mm	120mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x35cm	46x34x37cm	46x34x37cm	46x34x37cm
Master carton box gross weight	17.4kg	18.2kg	21.4kg	22kg	23.2kg
Qty/20'GP	2048pcs	2048pcs	1982pcs	1982pcs	1982pcs




Specification

Junhe Model	Q400B3A	Q550B3A	Q750B3A	Q900B3A
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x37cm	46x34x37cm	46x34x39cm	46x34x39cm
Master carton box gross weight	18.5kg	21.4kg	23.5kg	24.8kg
Qty/20'GP	1940pcs	1940pcs	1836pcs	1836pcs



QXXXB3A


Plastic submersible pump equipped with electronic aqua sensor for dirty water, the starting water level could be adjustable. With automatic control mode, the pump would automatically stop working when couldn't suck the water.

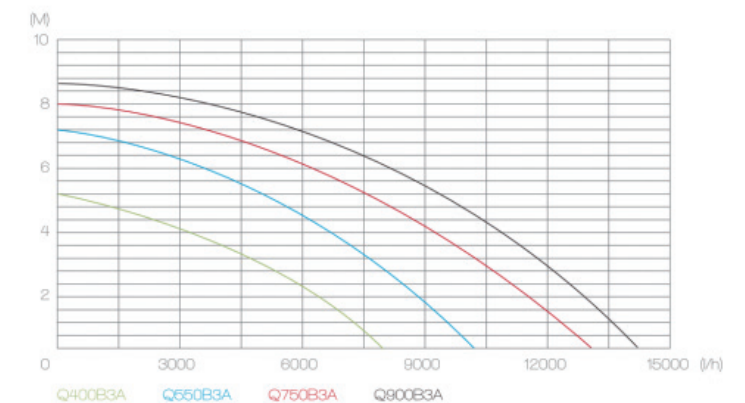



QXXX1

Submersible pump with plastic pump housing and floater switch for clean water application. It is one of the best selling plastic pumps in Junhe.

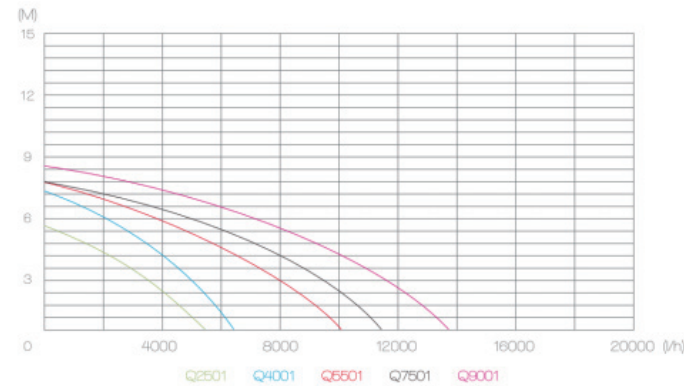

Specification

Junhe Model	Q2501	Q4001	Q5501	Q7501	Q9001
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	115mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x36cm	46x34x36cm	46x34x36cm	46x34x38cm	46x34x38cm
Master carton box gross weight	17.5kg	18kg	21.7kg	22.9kg	25.5kg
Qty/20'GP	1992pcs	1992pcs	1992pcs	1888pcs	1888pcs

Specification




Junhe Model	Q400B1	Q550B1	Q750B1	Q900B1	Q1000B1
Rated Power	400W	550W	750W	900W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m	10m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h	16000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar	1.0bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm	155mm	155mm
Lowest pump sucking level	35mm	35mm	35mm	35mm	35mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x38cm	46x34x38cm	46x34x40.5cm	46x34x40.5cm	46x34x40.5cm
Master carton box gross weight	18.2kg	22kg	23kg	26kg	26.5kg
Qty/20'GP	1888pcs	1888pcs	1672pcs	1672pcs	1672pcs



QXXXB1


Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

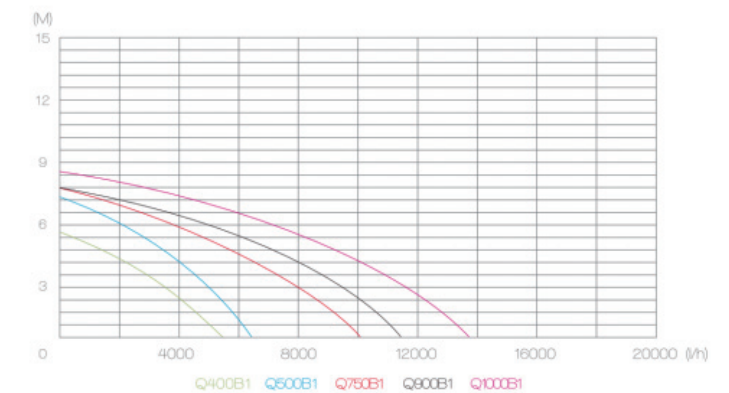



QXXX3

Submersible pump with plastic pump housing and floater switch for clean water application. It is one of the best selling plastic pumps in Junhe.

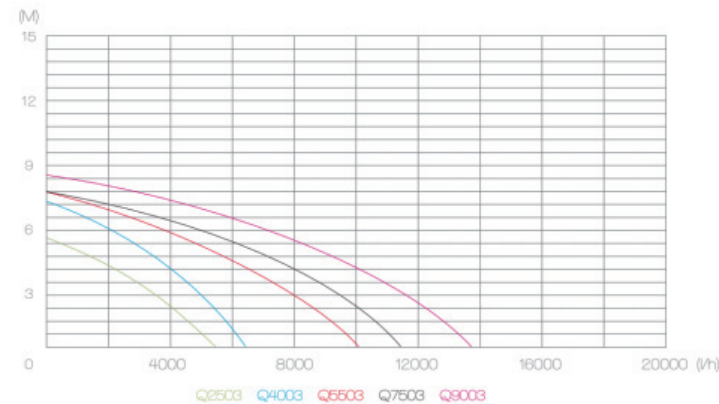

Specification

Junhe Model	Q2503	Q4003	Q5503	Q7503	Q9003
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	135mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x35cm	46x34x37cm	46x34x37cm
Master carton box gross weight	16.3kg	17.4kg	20.8kg	23kg	24.8kg
Qty/20'GP	2048pcs	2048pcs	1992pcs	1888pcs	1888pcs




Specification

Junhe Model	Q400B3	Q550B3	Q750B3	Q900B3
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	30mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm	155mm
Lowest pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x37cm	46x34x37cm	46x34x39cm	46x34x39cm
Master carton box gross weight	18.4kg	21.7kg	22.3kg	24kg
Qty/20'GP	1888pcs	1888pcs	1672pcs	1672pcs



QXXXB3

Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

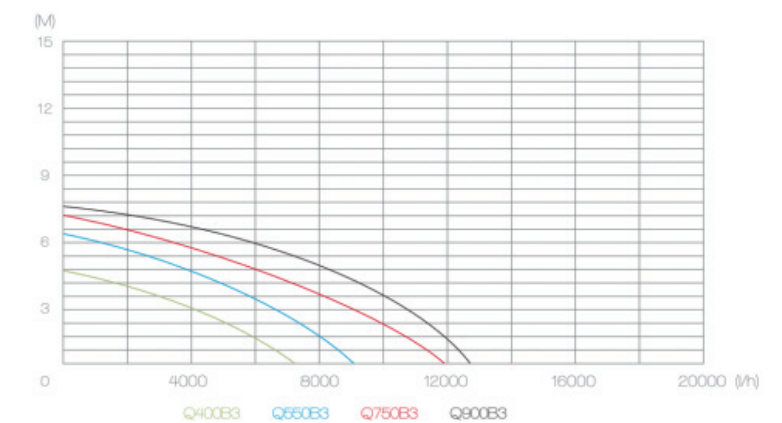




Specification

Junhe Model	Q2508-1	Q4008-1	Q5508-1	Q7508-1
Rated Power	250W	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	115mm	135mm
Lowest pump sucking level	1mm	1mm	1mm	1mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x33cm	46x38x33cm	46x38x33cm	46x38x33cm
Master carton box gross weight	16.4kg	18.5kg	21.6kg	22kg
Qty/20'GP	1940pcs	1940pcs	1940pcs	1940pcs



QXXX8-1


Submersible pump with plastic pump housing and float switch for clean water application , this pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

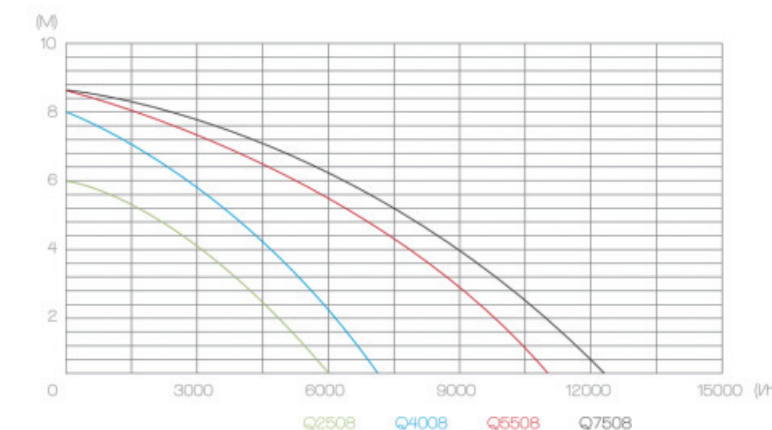



QXXXB8

Submersible pump with oval-shaped plastic pump housing and floater switch for dirty water application.

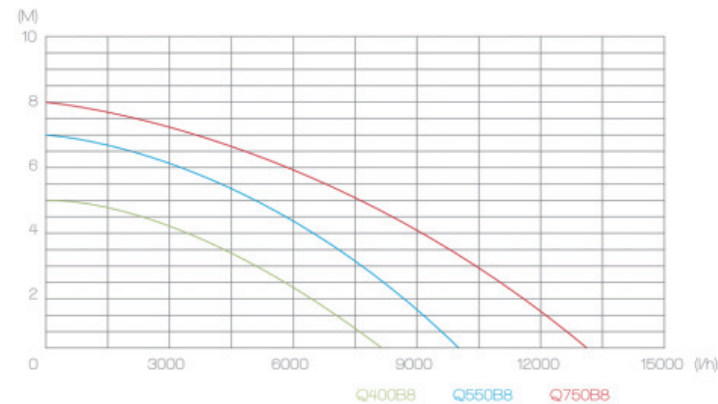

Specification

Junhe Model	Q400B8	Q550B8	Q750B8
Rated Power	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Length of cable	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm
Lowest pump sucking level	35mm	35mm	35mm
Max.medium temperature	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x38cm	46x38x38cm
Master carton box gross weight	20kg	22kg	22.5kg
Qty/20'GP	1688pcs	1688pcs	1688pcs




Specification

Junhe Model	Q25011	Q40011	Q55011	Q75011
Rated Power	250W	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	115mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x37cm	46x34x37cm	46x34x37cm	46x34x37cm
Master carton box gross weight	17.9kg	18.9kg	21.5kg	22kg
Qty/20'GP	1940pcs	1940pcs	1940pcs	1940pcs



QXXX11


Submersible pump with plastic pump housing and built-in floater switch for clean water application .It is one of the best selling pump items in Russian market.

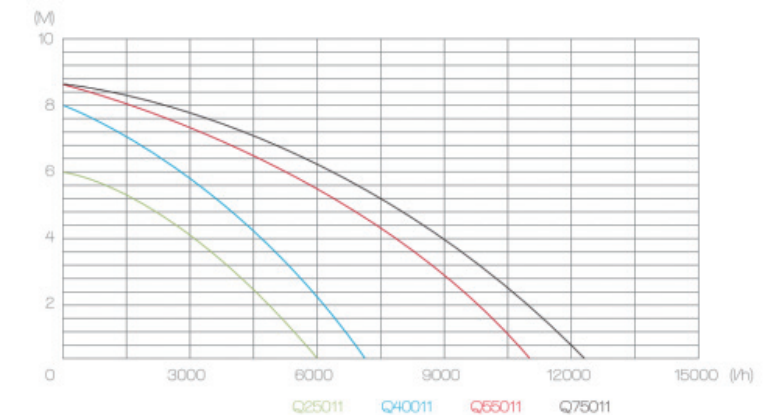



QXXXB11

Submersible pump with plastic pump housing and built-in floater switch for dirty water application. It is one of the best selling pump items in Russian market.

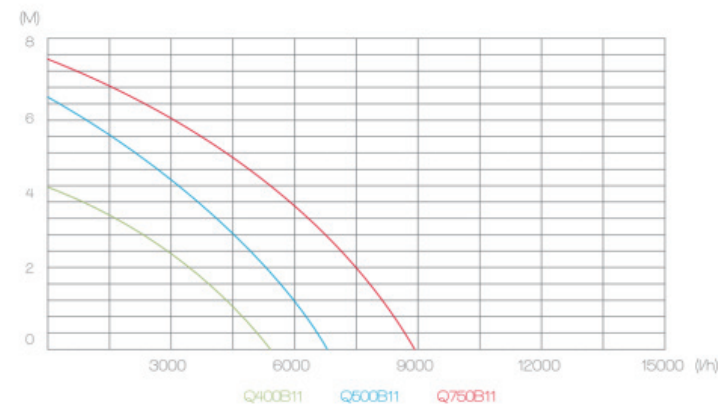

Specification

Junhe Model	Q400B11	Q550B11	Q750B11
Rated Power	400W	550W	750W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	35mm	35mm	35mm
Max.pressure	0.5bar	0.5bar	0.5bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm
Lowest pump sucking level	35mm	35mm	35mm
Max.medium temperature	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46x34x39cm	46x34x39cm	46x34x39cm
Master carton box gross weight	19kg	22.1kg	22.5kg
Qty/20'GP	1836pcs	1836pcs	1836pcs


Specification

Junhe Model	Q25014-1	Q35014-1	Q40014-1
Rated Power	250W	350W	400W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	9.0m	10m	11m
Max.pump rate	2500 l/h	3000 l/h	4000 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	0.5mm	0.5mm	0.5mm
Max.pressure	0.9bar	1.0bar	1.1bar
Dia of connecting pipe	G3/4"	G3/4"	G3/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10mm	10mm	10mm
Lowest pump starting level	65mm	65mm	65mm
Lowest pump sucking level	16mm	16mm	16mm
Max.medium temperature	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x35cm	46x34x35cm
Master carton box gross weight	17.9kg	19kg	19.5kg
Qty/20'GP	2048pcs	2048pcs	2048pcs




QXXX14-1

Plastic submersible rain water pump with flexible tube for clean water. This pump could be using for rain water application, in which you could put this pump into the wooden barrel or plastic water tank for water transferring or garden irrigation.

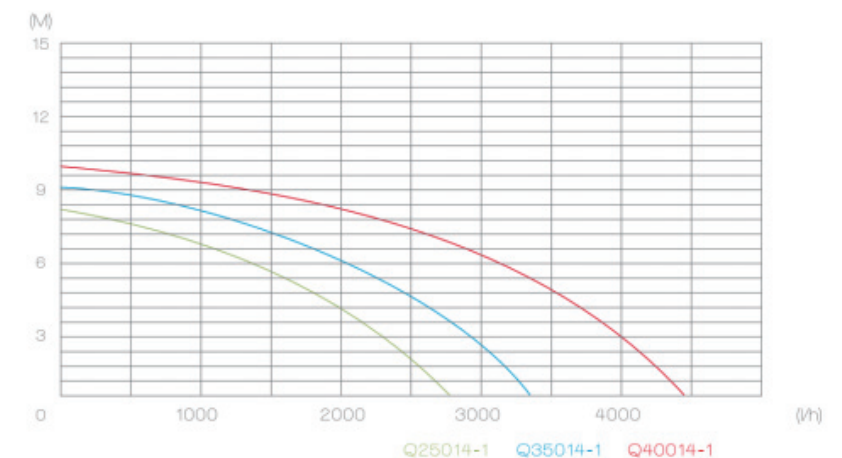



Submersible pump with plastic pump housing and floater switch for clean water application.

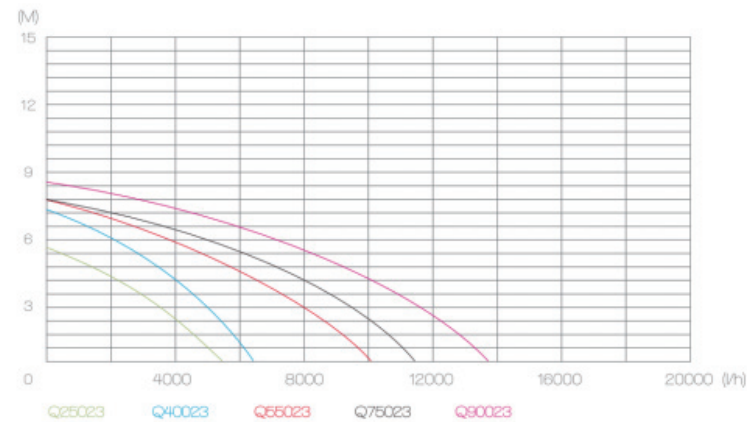

QXXX23



Specification

Junhe Model	Q25023	Q40023	Q55023	Q75023	Q90023
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	135mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x35cm	46x34x35cm	46x34x38cm	46x34x38cm
Master carton box gross weight	17.5kg	18kg	21kg	23kg	24.8kg
Qty/20'GP	2048pcs	2048pcs	2048pcs	1888pcs	1888pcs

Specification




Junhe Model	Q400B23	Q550B23	Q750B23	Q900B23
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	30mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm	155mm
Lowest pump sucking level	37mm	37mm	37mm	37mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x38cm	46x34x38cm	46x34x40cm	46x34x40cm
Master carton box gross weight	18.8kg	21.1kg	23.6kg	25kg
Qty/20'GP	1884pcs	1884pcs	1700pcs	1700pcs



QXXXB23


Submersible pump with plastic pump housing and floater switch for dirty water application.

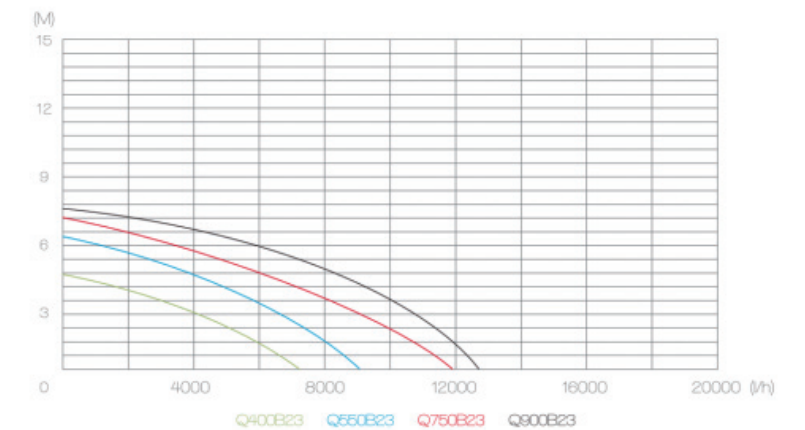



QXXX27

Submersible pump with plastic pump housing and floater switch for clean water application. It is one of the best selling plastic pumps in Junhe.

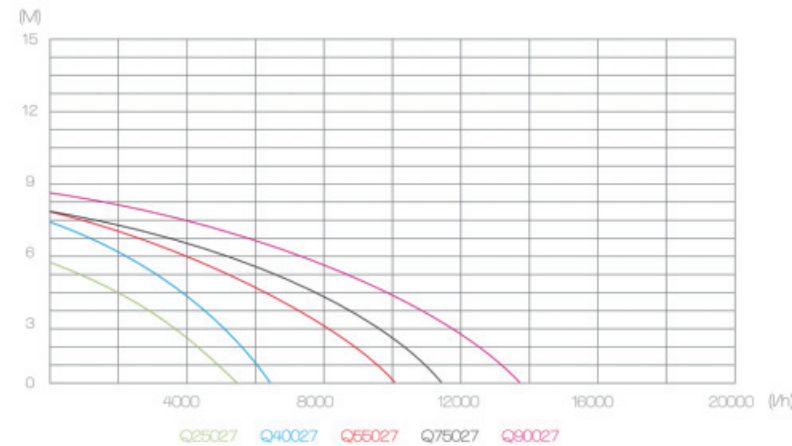


Specification

Junhe Model	Q25027	Q40027	Q55027	Q75027	Q90027
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	115mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x34cm	46x34x34cm	46x34x36cm
Master carton box gross weight	17.5kg	18.5kg	21.3kg	23kg	24.7kg
Qty/20'GP	2240pcs	2240pcs	2100pcs	2100pcs	1988pcs



QXXXB27

Submersible pump with plastic pump housing and floater switch for dirty water application . It is one of the best selling plastic pumps in Junhe.

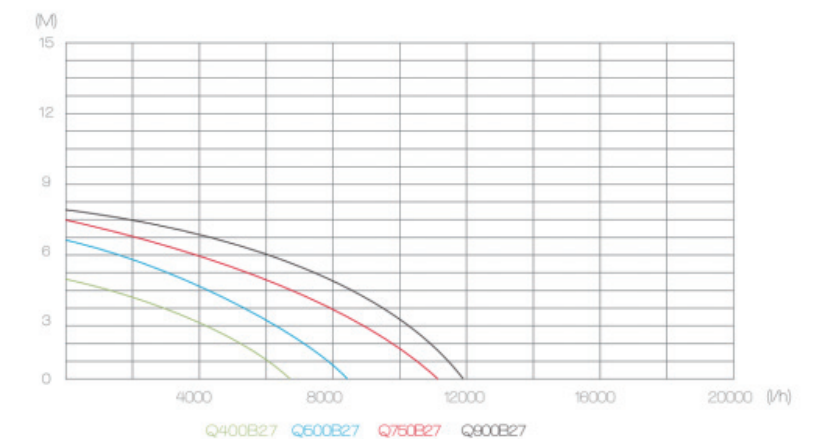


Specification

Junhe Model	Q400B27	Q550B27	Q750B27	Q900B27
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm	155mm
Lowest pump sucking level	35mm	35mm	35mm	35mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x37cm	46x34x39cm	46x34x39cm
Master carton box gross weight	17.6kg	20.6kg	22.9kg	24.3kg
Qty/20'GP	2048pcs	1940pcs	1840pcs	1840pcs



QXXX27S-1

Submersible pump with plastic pump housing and floater switch for clean water application. It is one of the best selling plastic pumps in Junhe.

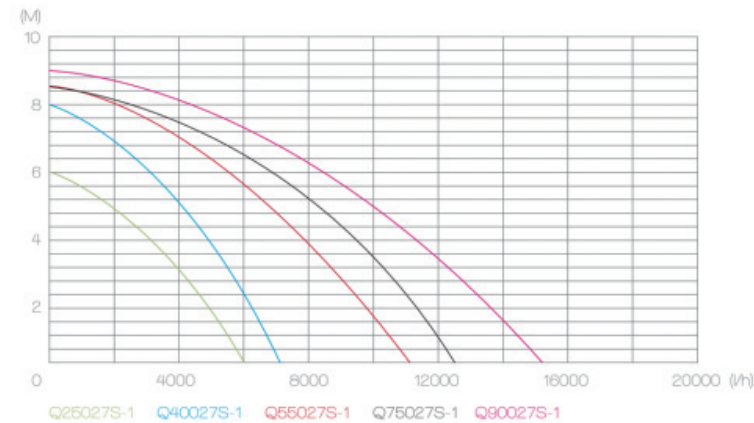

Specification

Junhe Model	Q25027S-1	Q40027S-1	Q55027S-1	Q75027S-1	Q90027
Rated Power	250W	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.0m	8.0m	8.5m	8.5m	9.5m
Max.pump rate	6000 l/h	7000 l/h	11000 l/h	12500 l/h	15000 l/h
Max.submersible depth	7m	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm	5mm
Max.pressure	0.6bar	0.8bar	0.85bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm	10mm
Lowest pump starting level	100mm	100mm	115mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x30cm	46x34x30cm	46x34x32cm	46x34x32cm	46x34x32cm
Master carton box gross weight	16.2kg	17kg	18.7kg	20.5kg	21kg
Qty/20'GP	2388pcs	2388pcs	2240pcs	2240pcs	2240pcs


Specification

Junhe Model	Q400B27S-1	Q550B27S-1	Q750B27S-1	Q900B27S-1
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	145mm	145mm	155mm
Lowest pump sucking level	35mm	35mm	35mm	35mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x34cm	46x34x37cm	46x34x37cm
Master carton box gross weight	17.2kg	18.7kg	20.5kg	21.4kg
Qty/20'GP	2180pcs	2100pcs	1940pcs	1940pcs




QXXXB27S-1

Submersible pump with plastic pump housing and floater switch for dirty water application. It is the best selling basic entry level for European market.

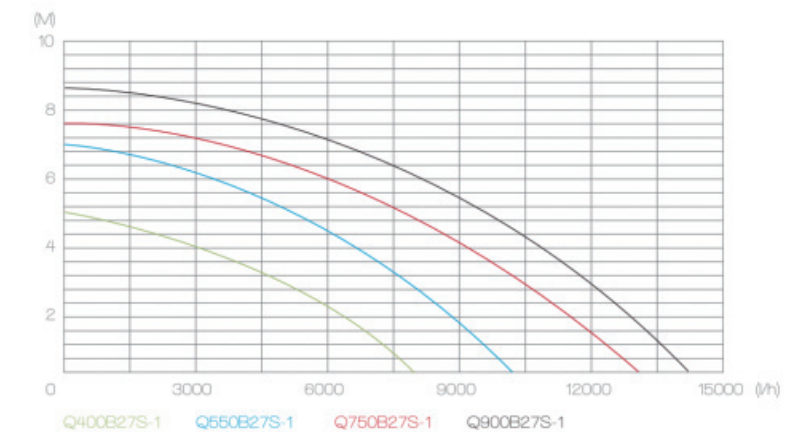



Submersible pump with plastic pump housing and floater switch and foldable pump base for both clean and dirty water application. When you open the pump base by hand, it could be used for dirty water application, when you close the pump base by hand, it could be used for clean water application.

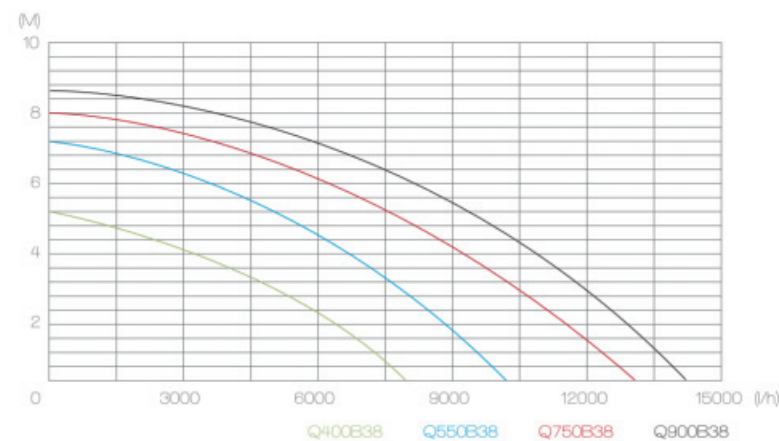

QXXXB38

Specification


Junhe Model	Q400B38	Q550B38	Q750B38	Q900B38
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	5.0m	7.0m	8.0m	8.5m
Max.pump rate	8000 l/h	10000 l/h	13000 l/h	14000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5-30mm	5-30mm	5-30mm	5-30mm
Max.pressure	0.5bar	0.7bar	0.8bar	0.85bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	155mm	155mm
Lowest pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x35cm	46x34x35cm	46x34x37cm	46x34x37cm
Master carton box gross weight	18.3kg	21kg	23.3kg	24.2kg
Qty/20'GP	2048pcs	2048pcs	1936pcs	1936pcs





QXXX51R

Sumersible pump with stainless steel pump body and plastic pump base and floater switch for clean water application.

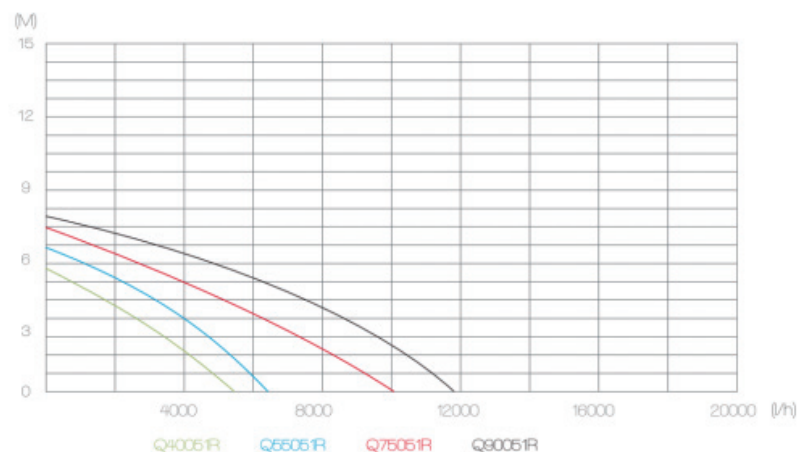


Specification

Junhe Model	Q40051R	Q55051R	Q75051R	Q90051R
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m	8.5m	9.0m
Max.pump rate	7500 l/h	8500 l/h	11000 l/h	12000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0.65bar	0.75bar	0.85bar	0.9bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	35mm	35mm	35mm	35mm
Lowest pump sucking level	11mm	11mm	11mm	11mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x37cm	46x34x37cm
Master carton box gross weight	21kg	21.7kg	23.5kg	26.3kg
Qty/20'GP	2172pcs	2172pcs	2172pcs	2172pcs



QXXXB51R

Sumersible pump with stainless steel pump body and plastic pump base and floater switch for dirty water application.

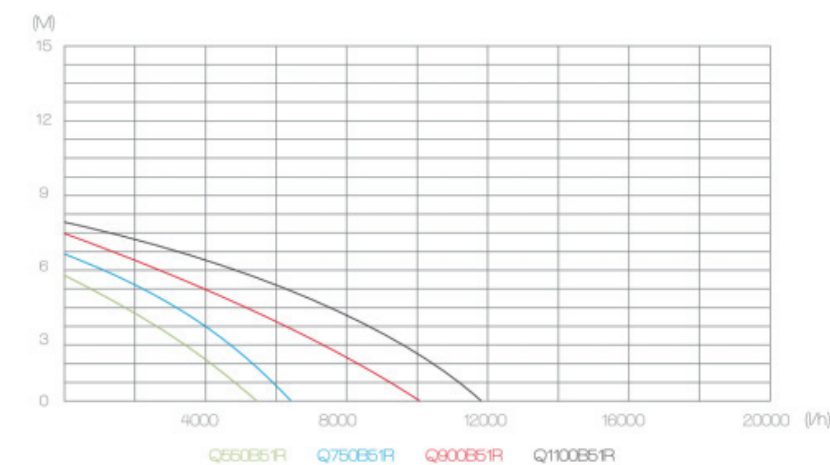

Specification


Junhe Model	Q550B51R	Q750B51R	Q900B51R	Q1100B51R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	9500 l/h	12500 l/h	13500 l/h	16500 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.8bar	0.9bar	1.05bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	40mm	40mm	40mm	40mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x38.5cm	46x34x38.5cm	46x34x38.5cm	46x34x38.5cm
Master carton box gross weight	24.6kg	25.7kg	27.3kg	29.8kg
Qty/20'GP	1664pcs	1644pcs	1644pcs	1644pcs





QXXX52R

Submersible pump with stainless steel pump housing and floater switch for clean water application. It is one of the best selling pump items in Junhe.

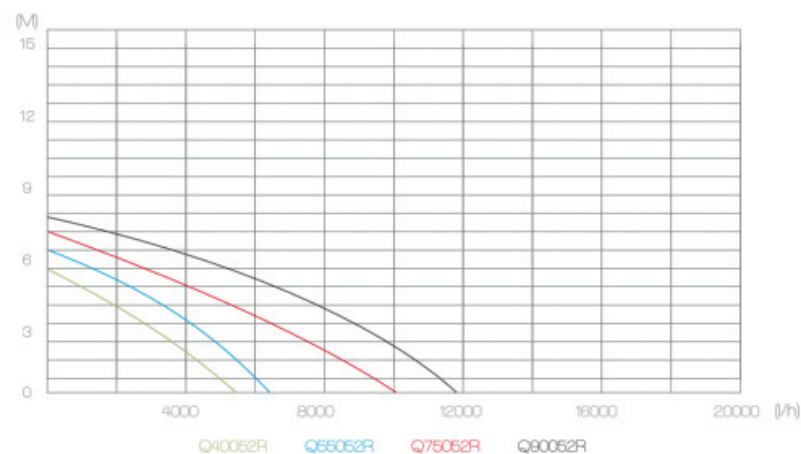

Specification

Junhe Model	Q40052R	Q55052R	Q75052R	Q90052R
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m	8.5m	9.0m
Max.pump rate	7500 l/h	8500 l/h	11000 l/h	13000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	5mm	5mm	5mm	5mm
Max.pressure	0.65bar	0.75bar	0.85bar	0.9bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	35mm	35mm	35mm	35mm
Lowest pump sucking level	11mm	11mm	11mm	11mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x37cm	46x34x37cm
Master carton box gross weight	19.9kg	22.8kg	23.6kg	26.7kg
Qty/20'GP	2172pcs	2172pcs	2172pcs	2172pcs

Specification




Junhe Model	Q550B52R	Q750B52R	Q900B52R	Q1100B52R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	10000 l/h	13000 l/h	14000 l/h	16500 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.8bar	0.9bar	1.05bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm
Master carton box gross weight	23.5kg	26.2kg	27.4kg	30.3kg
Qty/20'GP	1688pcs	1668pcs	1668pcs	1668pcs



QXXXB52R


Submersible pump with stainless steel pump housing and floater switch for dirty water application. It is one of the best selling pump items in Junhe.

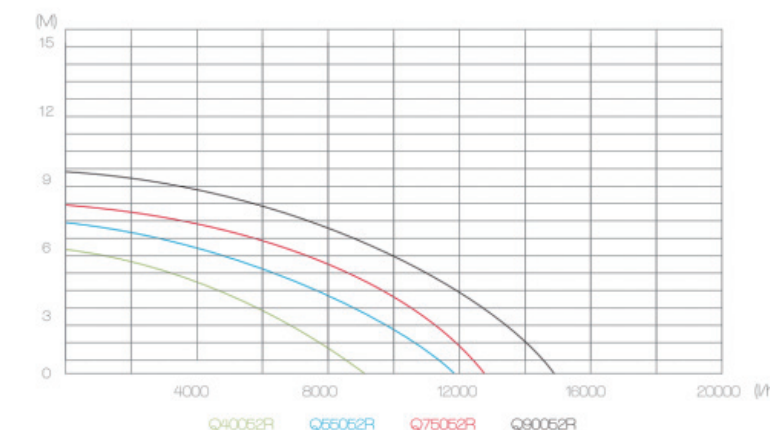



QXXX54R

Submersible pump with stainless steel pump housing and floater switch for clean water application.

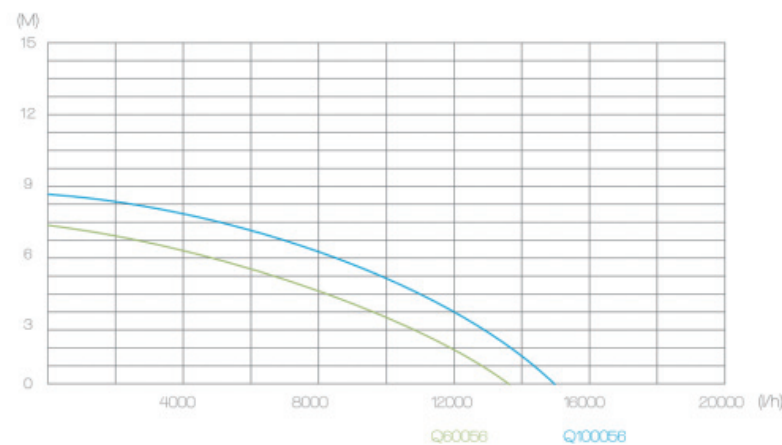

Specification

Junhe Model	Q60056	Q100056
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000 l/h	16500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x38cm
Master carton box gross weight	26.6kg	29.9kg
Qty/20'GP	1688pcs	1644pcs

Specification




Junhe Model	Q550B54R	Q750B54R	Q900B54R	Q1100B54R
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	9.0m	10.5m
Max.pump rate	10000 l/h	13000 l/h	14000 l/h	16500 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.8bar	0.9bar	1.05bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H05RN-F3G1.0mm ²	H05RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	45mm	45mm	45mm	45mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm	46x38x38.5cm
Master carton box gross weight	24.4kg	26.2kg	28kg	30.7kg
Qty/20'GP	1688pcs	1668pcs	1668pcs	1668pcs



QXXXB54R


Submersible pump with stainless steel pump housing and floater switch for dirty water application. It is one of the best selling pump items in Junhe.

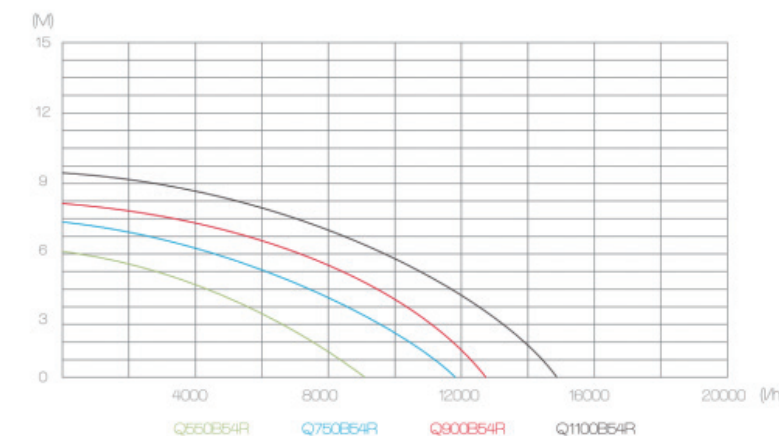



QXXX56

Submersible pump with stainless steel pump housing and floater switch for clean water application.

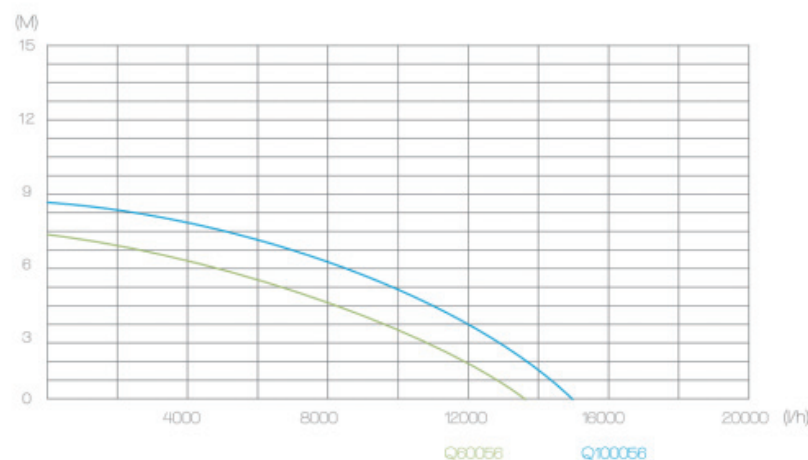

Specification

Junhe Model	Q60056	Q100056
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000 l/h	16500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x39cm
Master carton box gross weight	26.6kg	29.9kg
Qty/20'GP	1688pcs	1644pcs


Specification

Junhe Model	Q750B56	Q1100B56
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500 l/h	18500 l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x39cm	46x38x41cm
Master carton box gross weight	26.3kg	30.6kg
Qty/20'GP	1644pcs	1560pcs



QXXXB56


Submersible pump with stainless steel pump housing and floater switch for dirty water application.

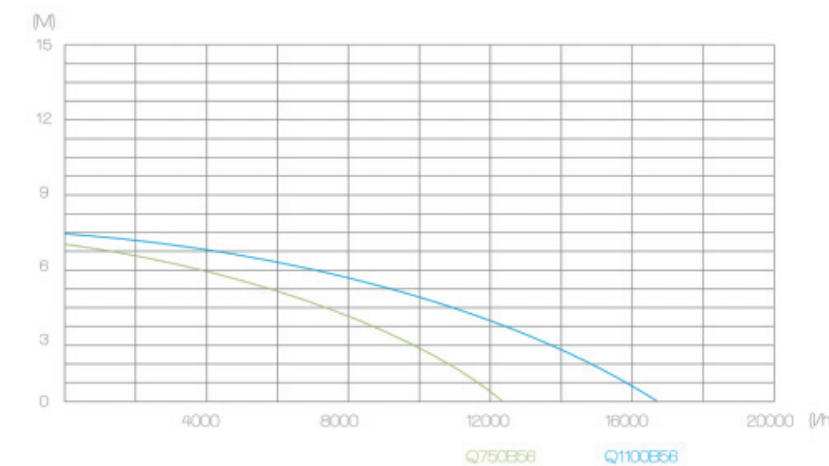



QXXX56A

Submersible pump with stainless steel pump housing and auqan sensor switch for clean water application.

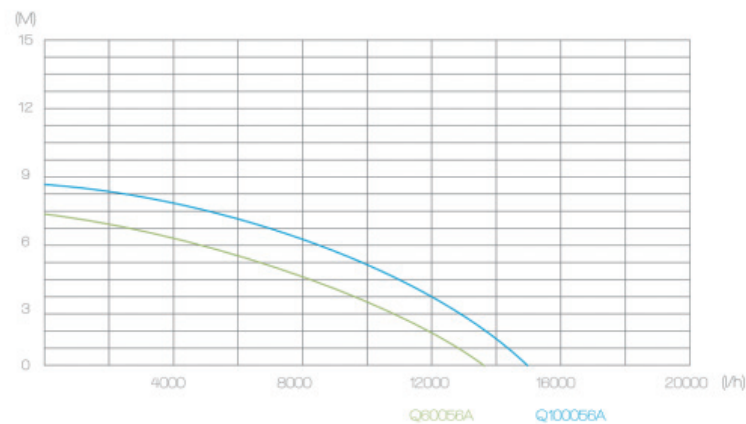

Specification

Junhe Model	Q60056A	Q100056A
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000 l/h	16500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x38cm	46x38x39cm
Master carton box gross weight	24.5kg	29.9kg
Qty/20'GP	1688pcs	1644pcs




Specification

Junhe Model	Q750B56A	Q1100B56A
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500 l/h	18500 l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	46x38x39cm	46x38x41cm
Master carton box gross weight	26.5kg	29.7kg
Qty/20'GP	1644pcs	1560pcs



QXXXB56A


Submersible pump with stainless steel pump housing and auqan sensor switch for dirty water application.

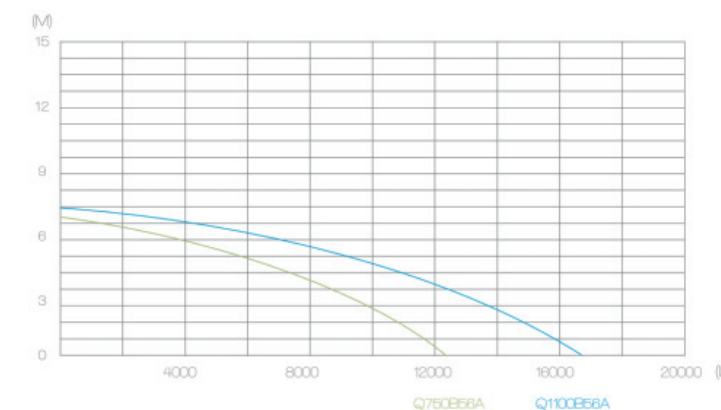



QXXX64

Submersible pump with stainless steel pump housing and floater switch for clean water application, this pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

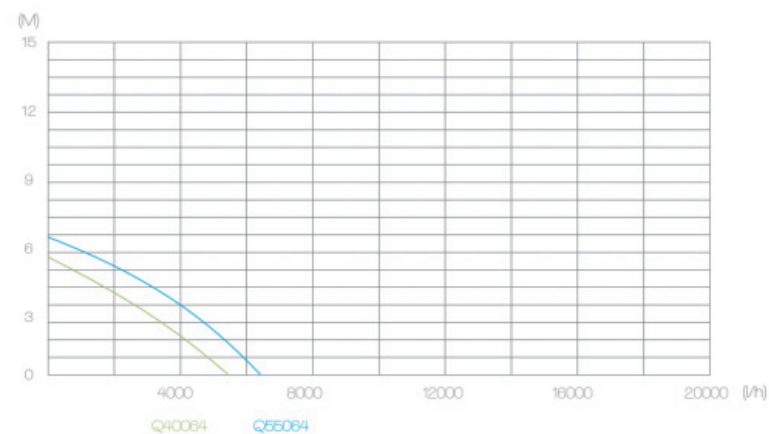

Specification

Junhe Model	Q40064	Q55064
Rated Power	400W	550W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m
Max.pump rate	7500 l/h	8500 l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	0.65bar	0.75bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	35mm	35mm
Lowest pump sucking level	1mm	1mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	42x36x33cm	42x36x33cm
Master carton box gross weight	18.6kg	19.2kg
Qty/20'GP	2248pcs	2248pcs


Specification

Junhe Model	Q550B96	Q750B96	Q900B96	Q1100B96
Rated Power	550W	750W	900W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	6.5m	8.0m	8.5m	9.0m
Max.pump rate	12500 l/h	14000 l/h	16500 l/h	20000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	35mm	35mm	35mm	35mm
Max.pressure	0.65bar	0.8bar	0.85bar	0.9bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²	HO5RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	40mm	40mm	40mm	40mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x38x37cm	46x38x39cm	46x38x39cm	46x39x39cm
Master carton box gross weight	23.5kg	27.5kg	28.5kg	29.5kg
Qty/20'GP	1732pcs	1644pcs	1644pcs	1644pcs



QXXXB96


Sumersible pump with stainless steel pump body and plastic pump base and floater switch for dirty water application.It is the best selling basic entry level for European market.

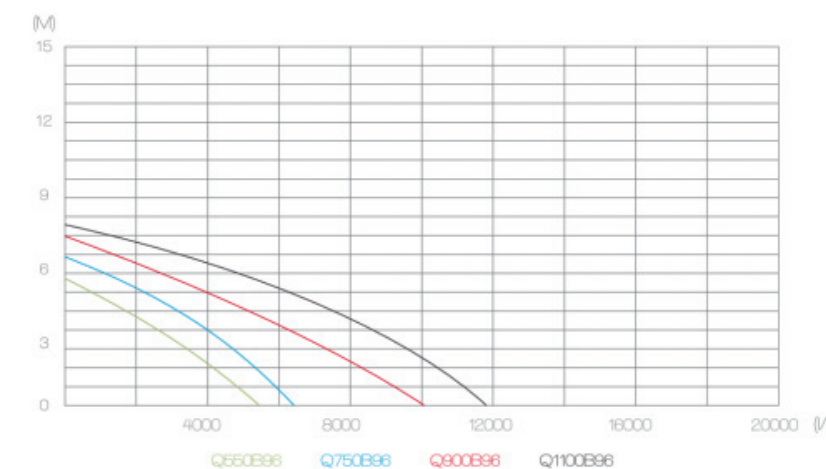



QXXX68

Submersible pump with stainless steel pump body and plastic casing and floater switch for clean water application.

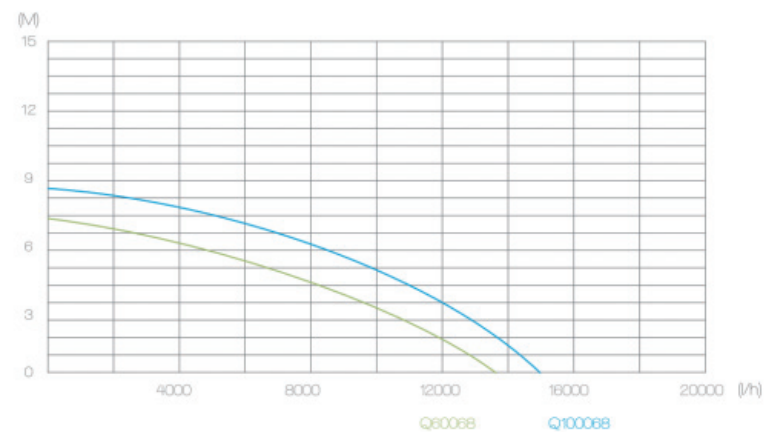

Specification

Junhe Model	Q60068	Q100068
Rated Power	600W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	8.0m	9.5m
Max.pump rate	15000 l/h	16500 l/h
Max.submersible depth	7m	7m
Max.grain size	5mm	5mm
Max.pressure	0.8bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	3mm	3mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x39cm	50x38x43cm
Master carton box gross weight	26.3kg	31.8kg
Qty/20'GP	1372pcs	1440pcs


Specification

Junhe Model	Q750B68	Q1100B68
Rated Power	750W	1100W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	7.5m	8.0m
Max.pump rate	13500 l/h	18500 l/h
Max.submersible depth	7m	7m
Max.grain size	15mm	20mm
Max.pressure	0.75bar	0.8bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	135mm	135mm
Lowest pump sucking level	33mm	33mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	50x38x39cm	50x38x43cm
Master carton box gross weight	27.7kg	31.6kg
Qty/20'GP	1512pcs	1372pcs



QXXB68


Submersible pump with stainless steel pump body and plastic casing and floater switch for dirty water application.

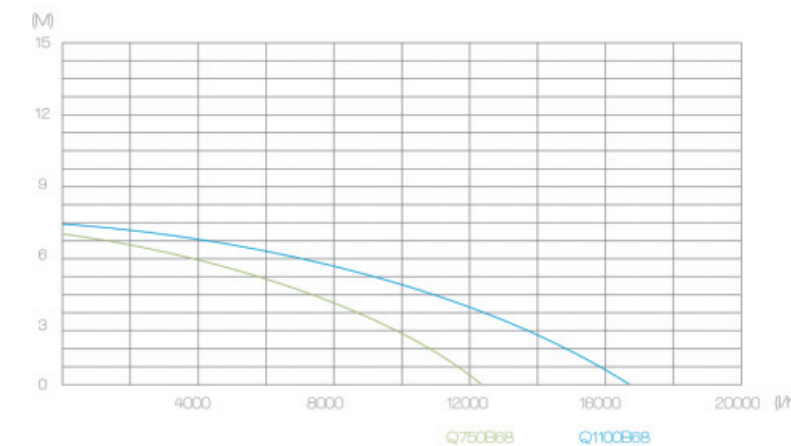



QXXX78

Submersible pump with stainless steel pump body and plastic casing and floater switch for clean water application. This pump is equipped with a very thin pump base which could sucking to the lowest water level 1mm.

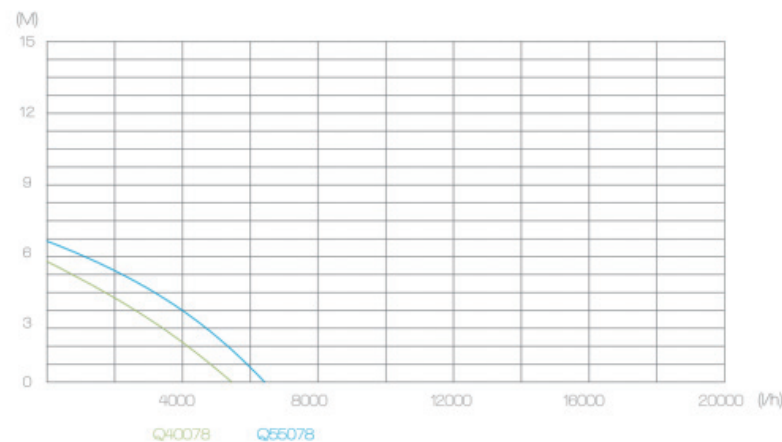

Specification

Junhe Model	Q40078	Q55078
Rated Power	400W	550W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	6.5m	7.5m
Max.pump rate	7500 l/h	8500 l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	0.65bar	0.75bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	35mm	35mm
Lowest pump sucking level	1mm	1mm
Max.medium temperature	35°C	35°C
Qty in carton box	4pcs	4pcs
Master carton box size	42x36x33cm	42x36x33cm
Master carton box gross weight	20.1kg	22.5kg
Qty/20'GP	2248pcs	2248pcs


Specification

Junhe Model	Q40065	Q55065	Q75065	Q90065
Rated Power	400W	550W	750W	900W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	7.0m	8.0m	8.5m	9.0m
Max.pump rate	8500 l/h	10000 l/h	11500 l/h	13000 l/h
Max.submersible depth	7m	7m	7m	7m
Max.grain size	10mm	35mm	35mm	35mm
Max.pressure	0.7bar	0.88bar	0.85bar	0.95bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/4"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Length of cable	10mm	10mm	10mm	10mm
Lowest pump starting level	135mm	135mm	135mm	135mm
Lowest pump sucking level	5mm	5mm	5mm	5mm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty in carton box	4pcs	4pcs	4pcs	4pcs
Master carton box size	46x34x33cm	46x34x33cm	46x34x33cm	46x34x33cm
Master carton box gross weight	17.7kg	21.7kg	24.5kg	27.2kg
Qty/20'GP	2180pcs	2180pcs	2180pcs	2180pcs



QXXX65


Submersible pump with stainless steel pump housing and floater switch for clean water application. Max grain size 10mm could pass through the top water discharge.

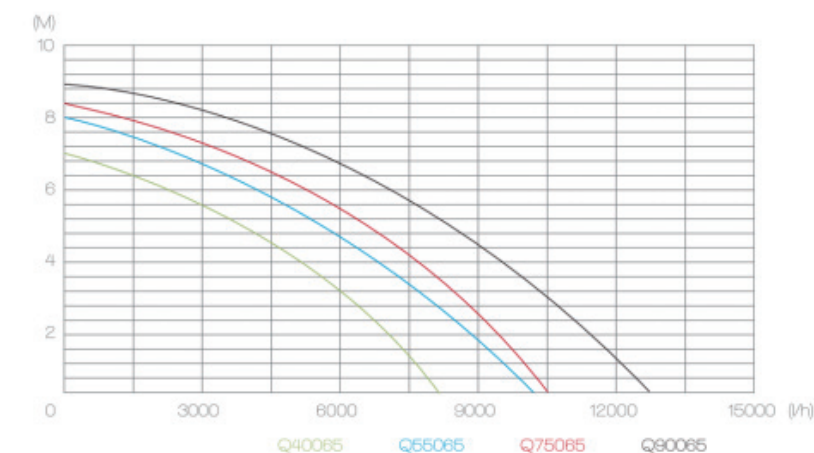



QXXXB69

Submersible pump with stainless steel pump housing and float switch for dirty water application. This pump has 2" water discharge and could reach very big flow rate per hour.

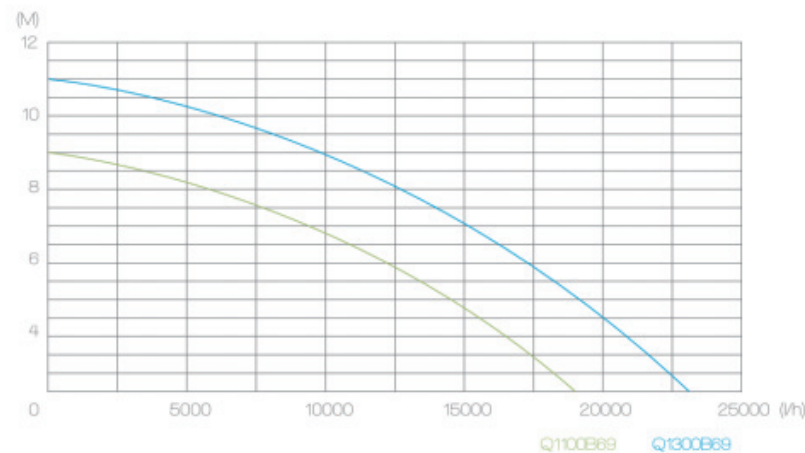

Specification

Junhe Model	Q1100B69	Q1300B69
Rated Power	1100W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9m	11m
Max.pump rate	18500 l/h	23000 l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	150mm	150mm
Lowest pump sucking level	50mm	50mm
Max.medium temperature	35°C	35°C
Qty in carton box	2pcs	2pcs
Master carton box size	40x26x13cm	40x26x13cm
Master carton box gross weight	17.7kg	18.9kg
Qty/20'GP	1252pcs	1252pcs

Specification




Junhe Model	Q750101	Q1000101
Rated Power	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	13m	16m
Max.pump rate	12000 l/h	13000 l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	1.3bar	1.6bar
Dia of connecting pipe	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	80mm	80mm
Lowest pump sucking level	22mm	22mm
Max.medium temperature	35°C	35°C
Qty in carton box	2pcs	2pcs
Master carton box size	44x25x46cm	44x25x46cm
Master carton box gross weight	16.9kg	18.8kg
Qty/20'GP	1106pcs	1106pcs



QXXX101


Submersible pump with plastic pump housing and float switch for clean water application. 2" water discharge, pump base with screen filter.

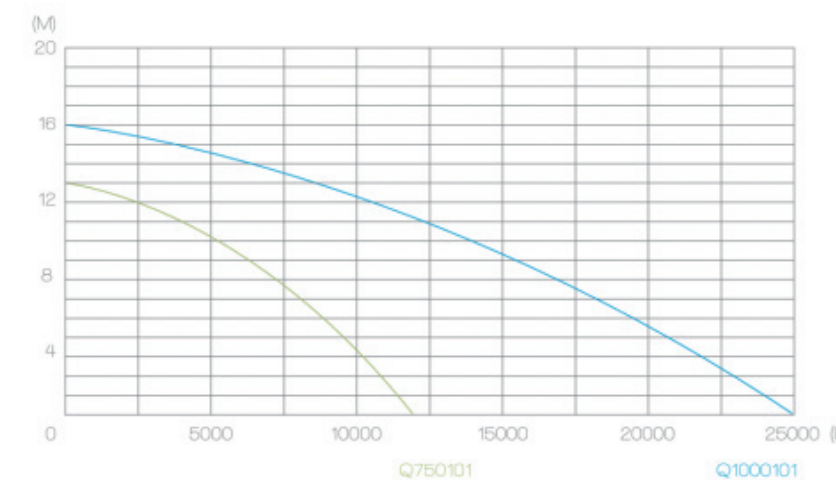



QXXXB101

Submersible pump with plastic pump housing and floater switch for dirty water application. 2" water discharge could reach very big flow rate per hour.

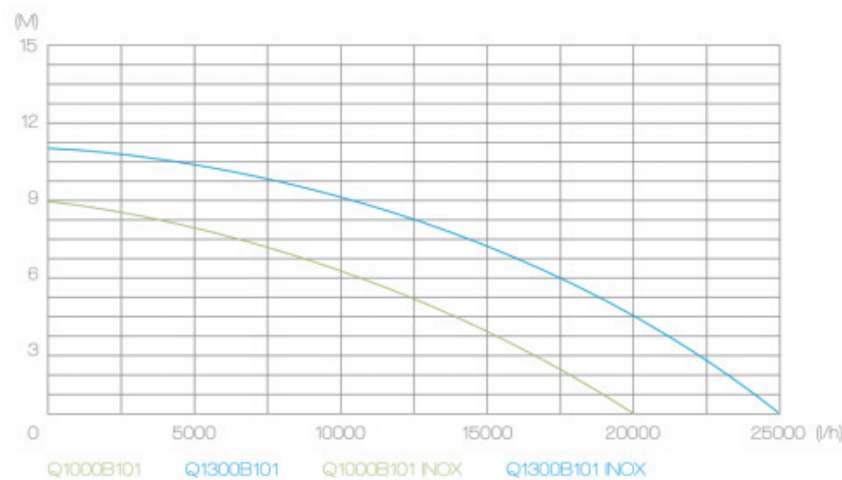

Specification

Junhe Model	Q1000B101	Q1300B101
Rated Power	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9m	11m
Max.pump rate	20000 l/h	25000 l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	165mm	165mm
Lowest pump sucking level	53mm	53mm
Max.medium temperature	35°C	35°C
Qty in carton box	2pcs	2pcs
Master carton box size	48x27x47cm	48x27x47cm
Master carton box gross weight	16.2kg	17kg
Qty/20'GP	920pcs	920pcs

Specification




Junhe Model	Q750101 INOX	Q1000101 INOX
Rated Power	750W	1000W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	13m	16m
Max.pump rate	12000 l/h	13000 l/h
Max.submersible depth	7m	7m
Max.grain size	1mm	1mm
Max.pressure	1.3bar	1.6bar
Dia of connecting pipe	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	80mm	80mm
Lowest pump sucking level	22mm	22mm
Max.medium temperature	35°C	35°C
Qty in carton box	2pcs	2pcs
Master carton box size	44x25x46cm	44x25x46cm
Master carton box gross weight	16.9kg	18.8kg
Qty/20'GP	1106pcs	1106pcs



QXXX101 INOX


Submersible pump with plastic pump housing and stainless steel casing and floater switch for clean water application. 2" water discharge, pump base with screen filter.

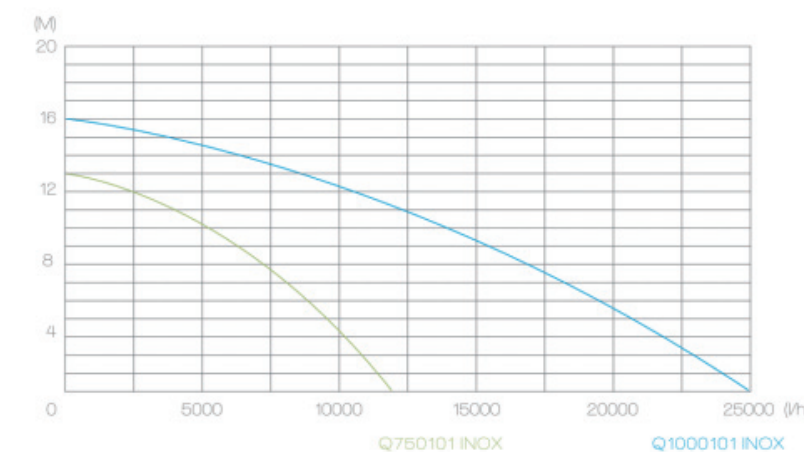



QXXXB101 INOX

Submersible pump with plastic pump housing and stainless steel casing and float switch for dirty water application. 2" water discharge could reach very big flow rate per hour.

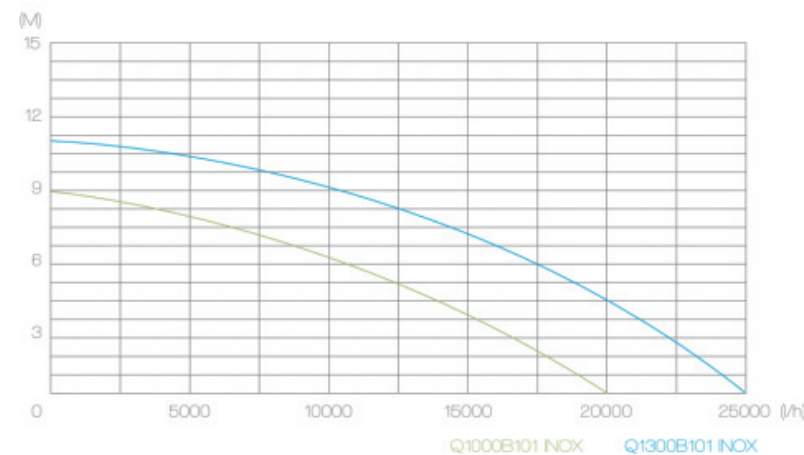

Specification


Junhe Model	Q1000B101 INOX	Q1300B101 INOX
Rated Power	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz
Max.pump height	9m	11m
Max.pump rate	20000 l/h	25000 l/h
Max.submersible depth	7m	7m
Max.grain size	40mm	40mm
Max.pressure	0.9bar	1.1bar
Dia of connecting pipe	G1-1/2"2"G2"	G1-1/2"2"G2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10mm	10mm
Lowest pump starting level	165mm	165mm
Lowest pump sucking level	53mm	53mm
Max.medium temperature	35°C	35°C
Qty in carton box	2pcs	2pcs
Master carton box size	48x27x47cm	48x27x47cm
Master carton box gross weight	16.5kg	17.3kg
Qty/20'GP	920pcs	920pcs

Junhe Model	Q80030-3P
Rated Power	800W
Vol&Fre.	230V/50Hz
Max.pump height	30m
Max.pump rate	5500 l/h
Max.submersible depth	7m
Max.grain size	0.5mm
Max.pressure	3.0bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"
Cable specification	HO7RN-F3G1.0mm ²
Length of cable	10mm
Lowest pump starting level	85mm
Lowest pump sucking level	22mm
Max.medium temperature	35°C
Qty in carton box	4pcs
Master carton box size	46x34x38cm
Master carton box gross weight	31.5kg
Qty/20'GP	1888pcs



QXXXB101 INOX

Multi-stage submersible pump with float switch for clean water application. Plastic pump handle/stainless steel pump body/aluminum pump base, 3 stage plastic impeller could reach max 30m delivery height.

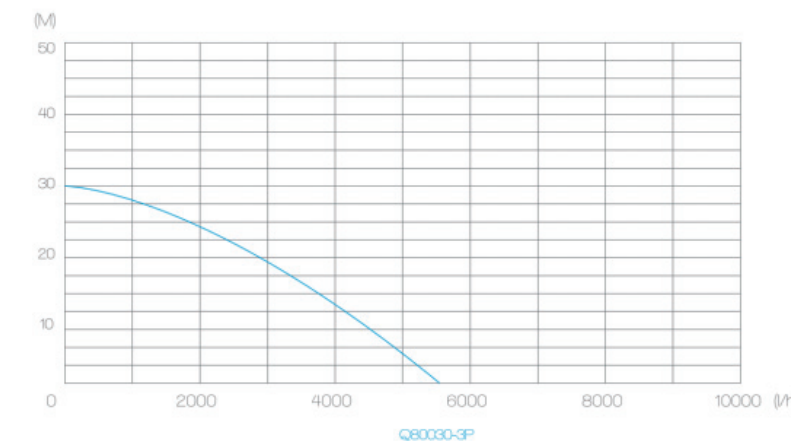




Specification

Junhe Model	Q70098-3P	Q100098-4P	Q130098-5P
Rated Power	700W	1000W	1300W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	30m	40m	50m
Max.pump rate	6500 l/h	6500 l/h	6500 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	2.5mm	2.5mm	2.5mm
Max.pressure	4.0bar	4.0bar	5.0bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10m	10m	10m
Lowest pump starting level	160mm	185mm	185mm
Lowest pump sucking level	40mm	40mm	40mm
Max.medium temperature	35°C	35°C	35°C
Qty in carton box	2pcs	2pcs	2pcs
Master carton box size	60.5x37x24.5cm	60.5x37x24.5cm	60.5x37x24.5cm
Master carton box gross weight	25kg	27.9kg	29kg
Qty/20'GP	1020pcs	1020pcs	1020pcs



QXXX90N-XP

Multi-stage submersible pump with complete stainless steel pump housing for clean water application. We have option of 4 stage / 5 stage / 6 stage plastic impellers for you.

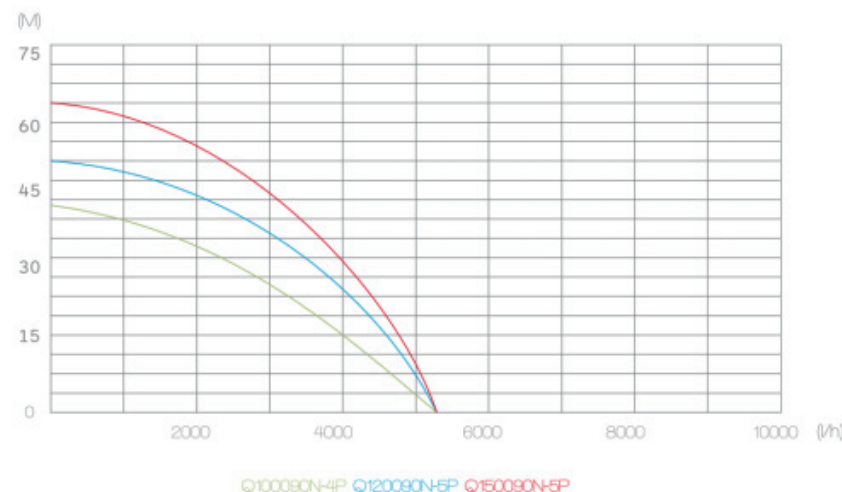


Specification

Junhe Model	Q100090N-4P	Q120090N-5P	Q150090N-6P
Rated Power	1000W	1200W	1500W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	42m	54m	65m
Max.pump rate	5500 l/h	5500 l/h	5500 l/h
Max.submersible depth	7m	7m	7m
Max.grain size	1.5mm	1.5mm	1.5mm
Max.pressure	4.2bar	5.4bar	6.5bar
Dia of connecting pipe	1"G1"1-1/4"G1-1/4"	1"G1"1-1/4"G1-1/2"	1"G1"1-1/4"G1-1/2"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	10m	10m	10m
Lowest pump starting level	160mm	185mm	185mm
Lowest pump sucking level	30mm	30mm	30mm
Max.medium temperature	35°C	35°C	35°C
Qty in carton box	2pcs	2pcs	2pcs
Master carton box size	60.5x37x24.5cm	60.5x37x24.5cm	60.5x37x24.5cm
Master carton box gross weight	25.7kg	26.6kg	28kg
Qty/20'GP	1020pcs	1020pcs	1020pcs




QXXX98-XP

Multi-stage submersible pump with stainless steel pump body and cast iron pump base for clean water application. We have option of 3 stage / 4 stage / 5 stage plastic impellers for you.

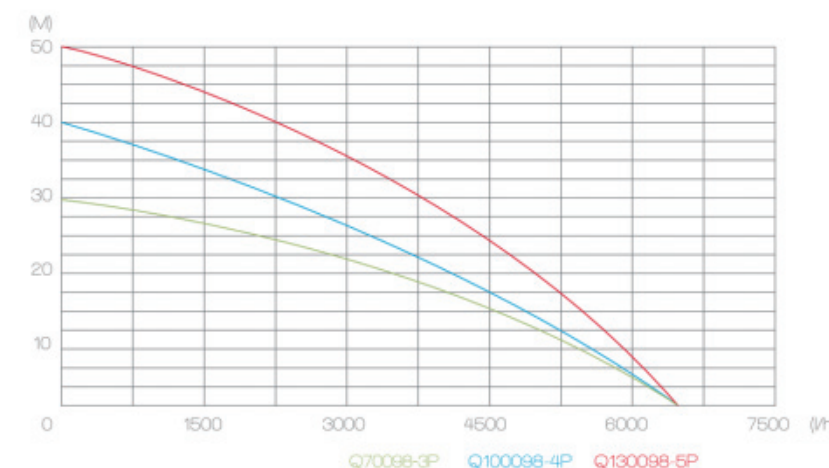



FPXXX-01

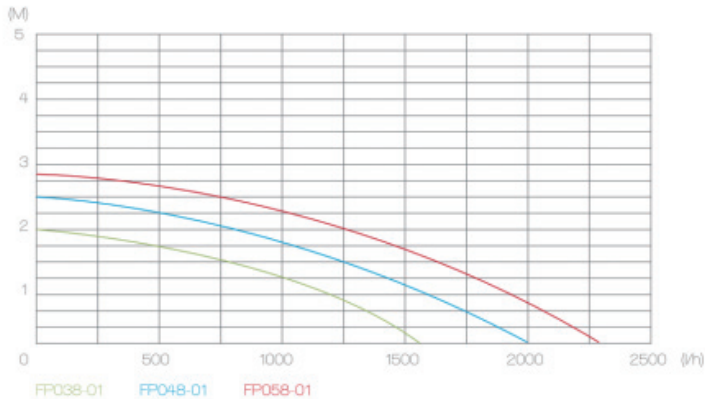


Submersible fountain pump with plastic pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Junhe Model	FP038-01	FP048-01	FP058-01
Rated Power	38W	48W	58W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	2m	2.5m	2.7m
Max.flow rate	1600 l/h	2000 l/h	2300 l/h
Max.suction height	3m	3m	3m
Max.pressure	0.2bar	0.25bar	0.27bar
Dia of connecting pipe	G1/2"	G1/2"	G1/2"
Cable specification	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²	HO5RN-F3G0.75mm²
Length of cable	10m	10m	10m
Lowerst pump starting level	20m	20m	20m
Max.medium temperature	35℃	35℃	35℃
Qty of Impeller	4PCS	4PCS	4PCS
Pressure tank volume	24L	24L	24L
Single gift box size	36x35x32cm	36x35x32cm	36x35x32cm
Single gross weight	12.5kg	13kg	13.5kg
Qty/20'GP	2780pcs	2780pcs	2780pcs

Submersible Fountain Pump

Submersible fountain pump with plastic pump body and interchangeable plastic nozzles to obtain different water plays. These pump motors are of low power consumption.

Submersible Fountain Pump



HYP07-018
HYP15-038




HYP28-038
HYP36-050

Junhe Model	HYP07-018	HYP15-028	HYP28-038	HYP36-050
Rated Power	18W	28W	38W	50W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	1.4m	1.6m	2.0m	2.5m
Max.flow rate	900 l/h	1200 l/h	1500 l/h	2000 l/h
Max.suction height	3m	3m	3m	3m
Max.pressure	0.14bar	0.16bar	0.2bar	0.25bar
Dia of connecting pipe	G1/2"	G1/2"	G1/2"	G1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10m	10m	10m	10m
Lowerst pump starting level	15cm	15cm	20cm	20cm
Max.medium temperature	35°C	35°C	35°C	35°C
Qty of Impeller	12pcs	12pcs	8pcs	8pcs
Single gift box size	42x42x36cm	42x42x36cm	42x42x32cm	42x42x32cm
Single gross weight	20.5kg	20.5kg	16.5kg	18.5kg
Qty/20'GP	5280pcs	5280pcs	3968pcs	3968pcs




HYP50-075
HYP70-110

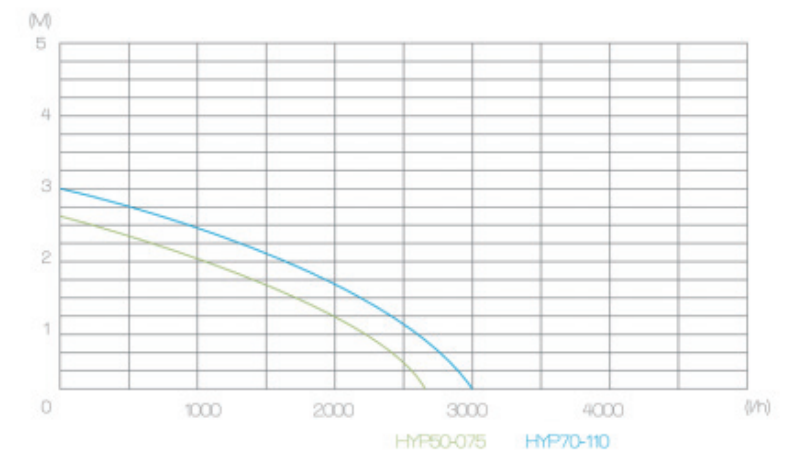

Junhe Model	HYP50-075	HYP70-110
Rated Power	75W	110W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	2.6m	3m
Max.flow rate	2600 l/h	3000 l/h
Max.suction height	3m	3m
Max.pressure	0.26bar	0.3bar
Dia of connecting pipe	G1"	G1"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10m	10m
Lowerst pump starting level	25m	25m
Max.medium temperature	35°C	35°C
Qty of Impeller	6pcs	6pcs
Pressure tank volume	24L	24L
Single gift box size	48x25x54cm	48x25x54cm
Single gross weight	20.5kg	23kg
Qty/20'GP	2592pcs	2592pcs



HYP28-038B
HYP36-050B

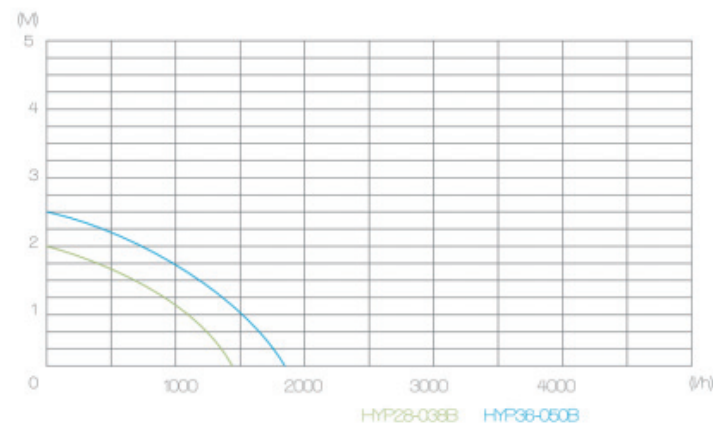


Submersible fountain pump with stainless steel pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Junhe Model	HYP28-038B	HYP36-050B
Rated Power	38W	50W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	1.9m	2.3m
Max.flow rate	1400 l/h	1750 l/h
Max.suction height	3m	3m
Max.pressure	0.19bar	0.23bar
Dia of connecting pipe	G1/2"	G1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10m	10m
Lowerst pump starting level	25m	25m
Max.medium temperature	35°C	35°C
Qty of Impeller	8pcs	8pcs
Pressure tank volume	24L	24L
Single gift box size	42x42x36cm	42x42x36cm
Single gross weight	19kg	20.5kg
Qty/20'GP	3500pcs	3500pcs



PFP85-3000
PFP120-3600

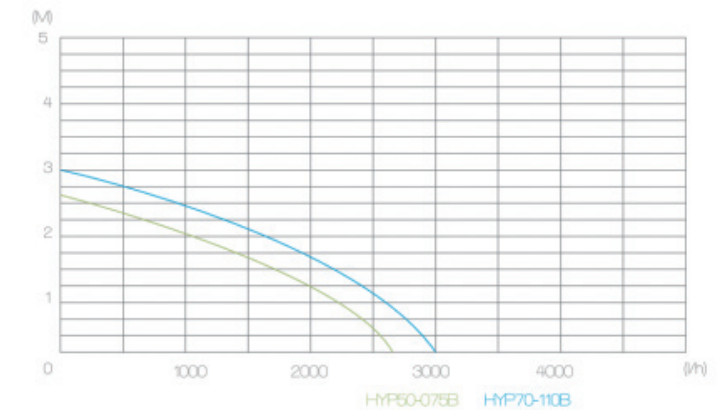


Submersible fountain pump with plastic pump body and 3pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Junhe Model	HYP50-075B	HYP70-110B
Rated Power	75W	110W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	2.6m	3m
Max.flow rate	2600 l/h	3000 l/h
Max.suction height	3m	3m
Max.pressure	0.26bar	0.3bar
Dia of connecting pipe	G1"	G1"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²
Length of cable	10m	10m
Lowerst pump starting level	30m	30m
Max.medium temperature	35°C	35°C
Qty of Impeller	4pcs	4pcs
Pressure tank volume	24L	24L
Single gift box size	48x25x40cm	48x25x40cm
Single gross weight	16kg	17.5kg
Qty/20'GP	2340pcs	2340pcs



HYP38-1500
HYP50-2000

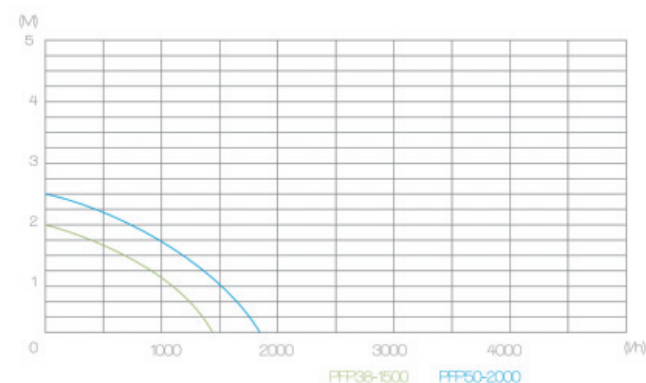


Submersible fountain pump with stainless steel pump body and 4pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200 liters.

Junhe Model	PFP38-1500	PFP50-2000
Rated Power	38W	50W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	2.0m	2.5m
Max.flow rate	1500 l/h	2000 l/h
Max.suction height	3m	3m
Max.pressure	0.2bar	0.25bar
Dia of connecting pipe	G1/2"	G1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Length of cable	10m	10m
Lowerst pump starting level	10m	20m
Max.medium temperature	35°C	35°C
Qty of Impeller	4pcs	4pcs
Single gift box size	43.5x33.5x30cm	43.5x33.5x30cm
Single gross weight	14kg	15kg
Qty/20'GP	2560pcs	2560pcs




HYP85-3000
HYP120-3600

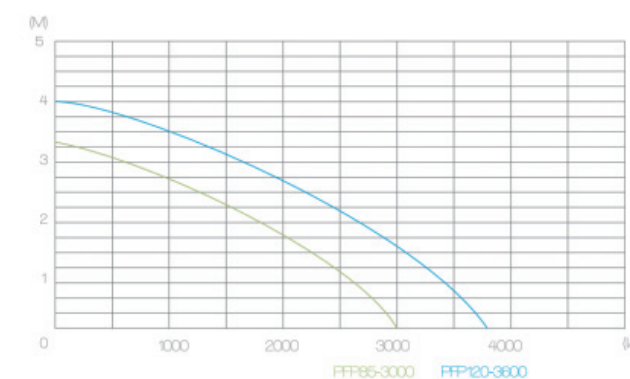

Submersible fountain pump with plastic pump body and 3pcs interchangeable plastic nozzles to obtain different water plays. The pump motors are of low power consumption. It is ideal to install in ponds or basins with a water capacity of 800 to 2200liters.

Junhe Model	PFP85-3000	PFP120-3600
Rated Power	85W	120W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	3.4m	4m
Max.flow rate	3000 l/h	3600 l/h
Max.suction height	3m	3m
Max.pressure	0.34bar	0.4bar
Dia of connecting pipe	G1"	G1"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Length of cable	10m	10m
Lowerst pump starting level	25m	20m
Max.medium temperature	35°C	35°C
Qty of Impeller	2pcs	4pcs
Pressure tank volume	24L	24L
Single gift box size	43.5x29.5x36cm	43.5x29.5x36cm
Single gross weight	9.5kg	10kg
Qty/20'GP	1212pcs	1212pcs

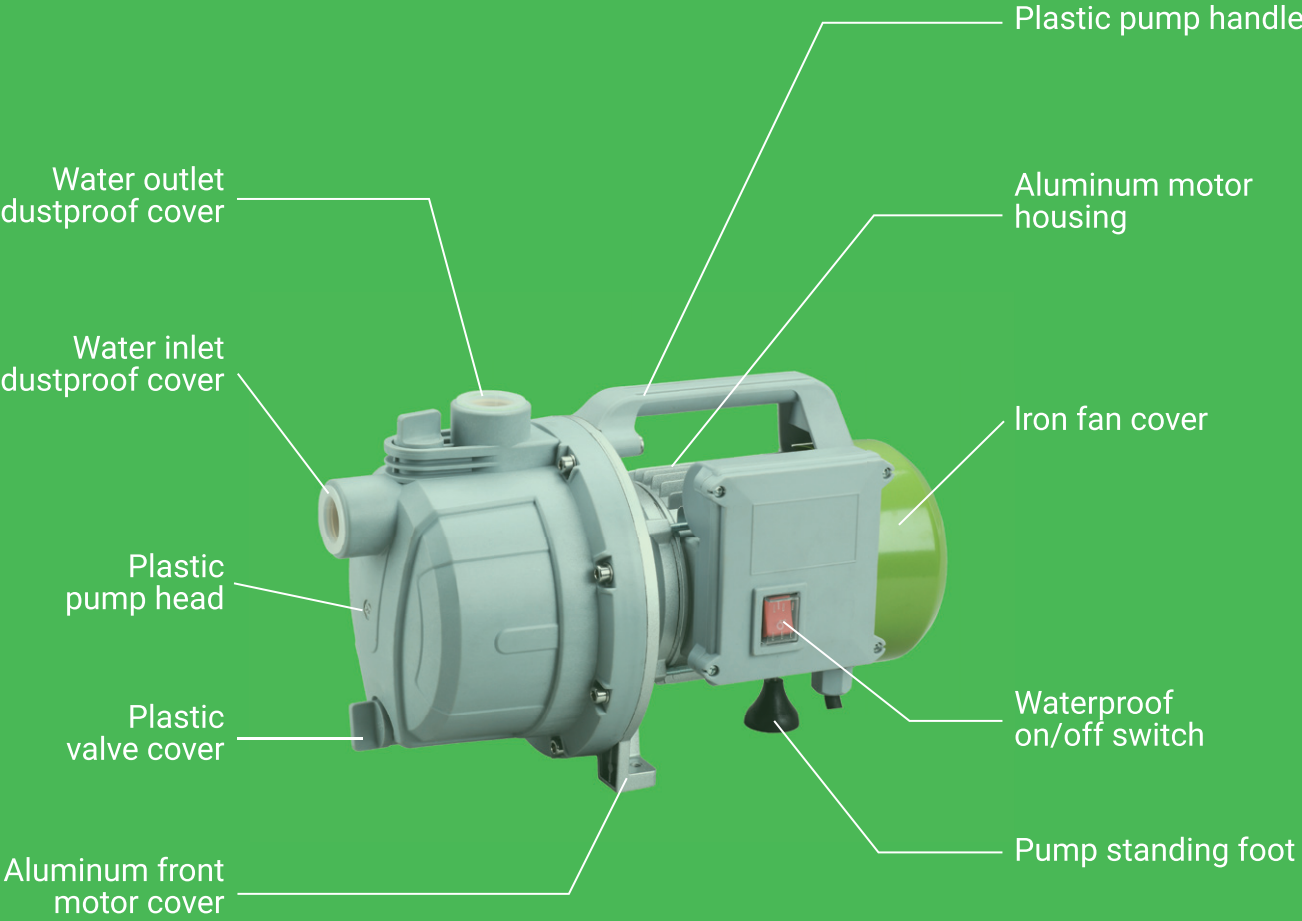


Garden Jet Pump

Submersible fountain pump with plastic pump body and interchangeable plastic nozzles to obtain different water plays. These pump motors are of low power consumption.


Specification

			
Junhe Model	JGP40037 PRO	JGP60037 PRO	JGP80037 PRO
Rated Power	400W	600W	800W
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.Pressure	3.0bar	3.8bar	4.2bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x25x30cm	39x25x30cm	39x25x30cm
Single gross weight	5.8kg	6.9kg	7.2kg
Qty/20'GP	957pcs	957pcs	957pcs

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application.The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easyto install and operate.

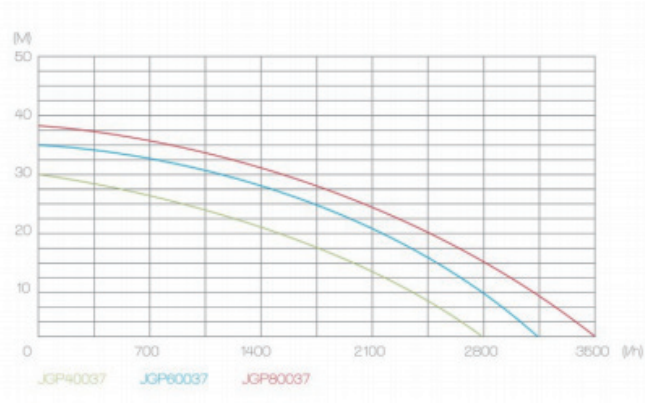



JGPXXX37

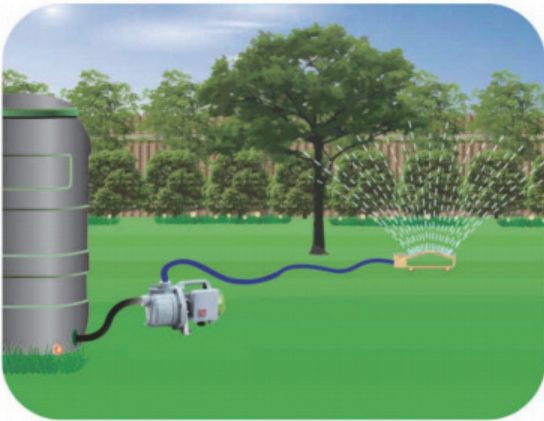

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.



JGPXXX37INOX PRO

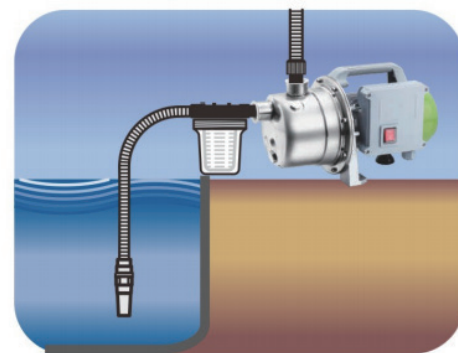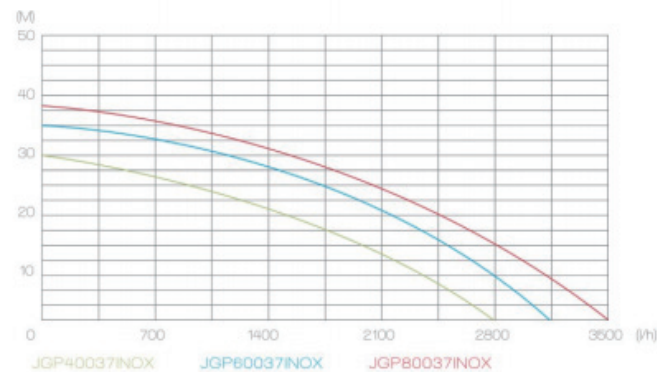


Specification

Junhe Model	JGP40037INOX PRO	JGP60037INOX PRO	JGP80037INOX PRO
Rated Power	400W	600W	800W
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.Pressure	3.0bar	3.8bar	4.2bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x25x30cm	39x25x30cm	39x25x30cm
Single gross weight	5.8kg	6.9kg	7.2kg
Qty/20'GP	957pcs	957pcs	957pcs


Specification

Junhe Model	JGP90037 PRO	JGP110037 PRO	JGP130037 PRO
Rated Power	900W	1100W	1300W
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.Pressure	4.8bar	5.0bar	5.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39.5x25x30cm	39.5x25x30cm	39.5x25x30cm
Single gross weight	9.1kg	9.6kg	10.5kg
Qty/20'GP	945pcs	945pcs	945pcs

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

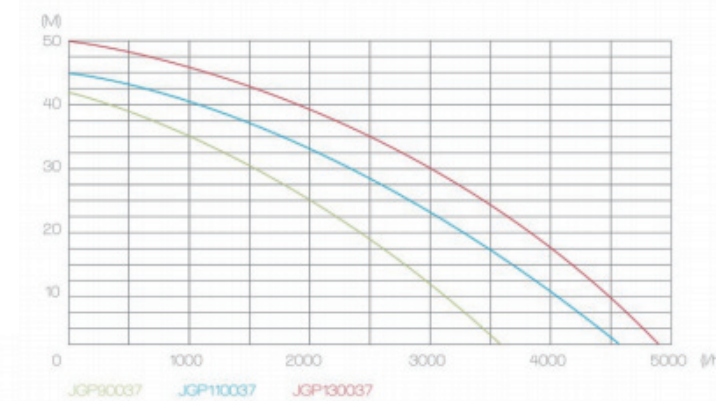



JGPXXX37 PRO

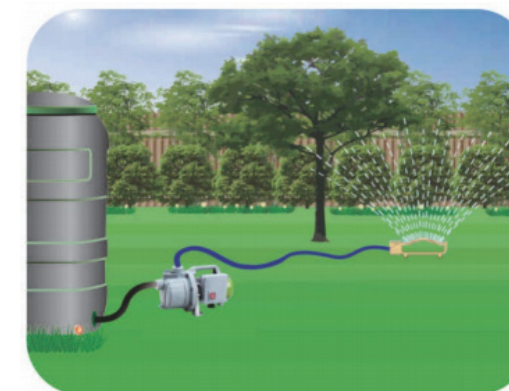

Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.



JGPXXX37INOX

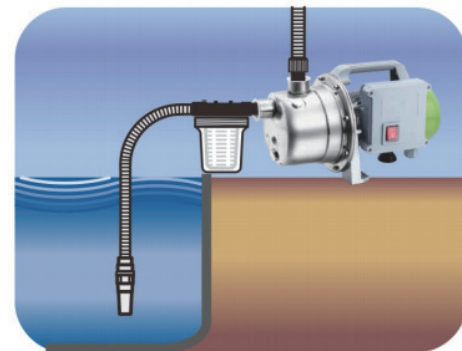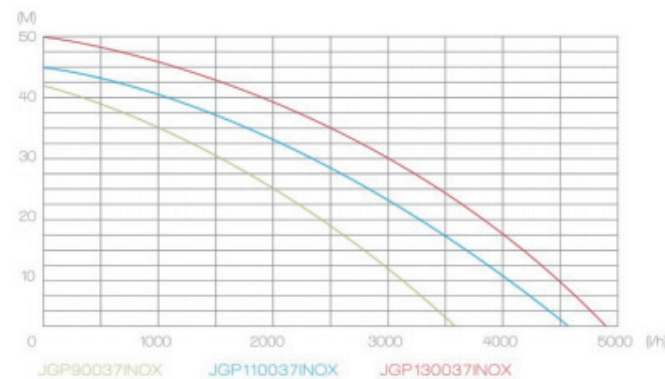


Specification

Junhe Model	JGP90037INOX PRO	JGP110037INOX PRO	JGP130037INOX PRO
Rated Power	900W	1100W	1300W
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.Pressure	4.8bar	5.0bar	5.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39.5x25x30cm	39.5x25x30cm	39.5x25x30cm
Single gross weight	9.1kg	9.9kg	10.7kg
Qty/20'GP	945pcs	945pcs	945pcs


Specification

Junhe Model	JGP40039 PRO	JGP60039 PRO	JGP80039 PRO
Rated Power	400W	600W	800W
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.Pressure	3.0bar	3.8bar	4.2bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	35x25x30cm	35x25x30cm	35x25x30cm
Single gross weight	6.5kg	6.8kg	7.2kg
Qty/20'GP	1066pcs	1066pcs	1066pcs

Garden jet pump with plastic pump head and plastic pump handle and plastic pump base and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

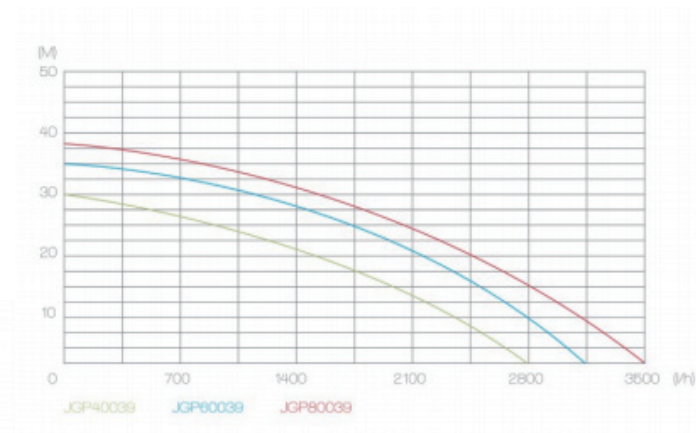



JGPXXX39 PRO

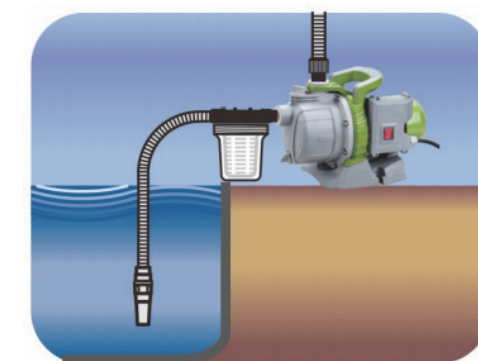

Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump base and aluminum motor housing and iron fan cover and on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.



JGPXXX39INOX PRO

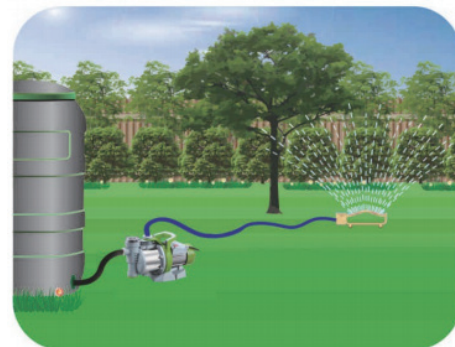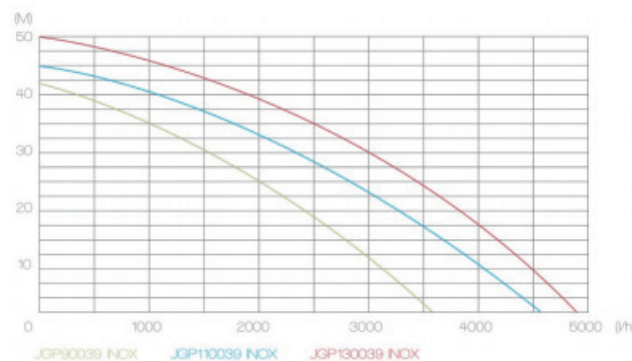

Specification

Junhe Model	JGP90039INOX PRO	JGP110039INOX PRO	JGP130039INOX PRO
Rated Power	900W	1100W	1300W
Max.Head	48m	50m	58m
Max.flow rate	6700 l/h	7000 l/h	7300 l/h
Max.Pressure	4.8bar	5.0bar	5.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x25x35.5cm	46x25x35.5cm	46x25x35.5cm
Single gross weight	9.2kg	11.2kg	12.2kg
Qty/20'GP	685pcs	685pcs	685pcs




Specification

Junhe Model	JGP90039BN INOX PRO	JGP110039BN INOX PRO	JGP130039BN INOX PRO
Rated Power	900W	1100W	1300W
Max.Head	48m	50m	58m
Max.flow rate	5800 l/h	6000 l/h	6300 l/h
Max.Pressure	4.8bar	5.0bar	5.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x28x38cm	46x28x38cm	46x28x38cm
Single gross weight	9.8kg	11.7kg	12.1kg
Qty/20'GP	572pcs	572pcs	572pcs



Multi-function garden jet pump with plastic pump head and stainless steel casing for clean water application. The pump head has built-in water filter / built-in flow detector / built-in non-return valve, the junction box has contacting switch and indicator light to show the pump in different operation status, the pump base has installed built-in pressure detector for which could automatically control the pump start and stop on the set pressure.

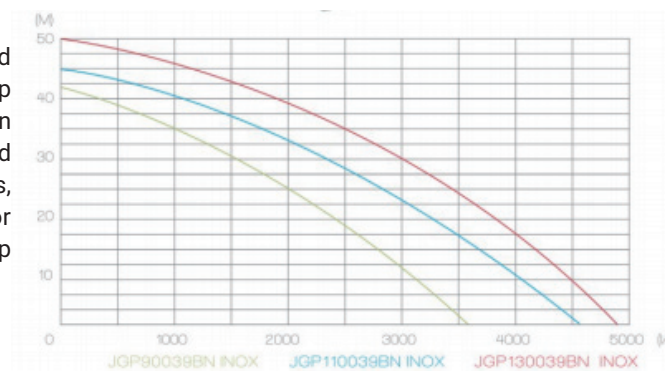

JGPXXX39BN INOX PRO






Specification

Junhe Model	JGP90039BL INOX PRO	JGP110039BL INOX PRO	JGP130039BL INOX PRO
Rated Power	900W	1100W	1300W
Max.Head	48m	50m	58m
Max.flow rate	5800 l/h	6000 l/h	6300 l/h
Max.Pressure	4.8bar	5.0bar	5.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x28x38cm	46x28x38cm	46x28x38cm
Single gross weight	9.8kg	11.7kg	12.1kg
Qty/20'GP	572pcs	572pcs	572pcs



Multi-function garden jet pump with plastic pump head and stainless steel casing for clean water application. The pump head has built-in waterfilter / built-in flow detector/ built-in non-return valve, the junction box has LCD screen and contacting switch and indicator light to show the pump indifferent operation status, the pump base has installed built-in pressure detector for which could automatically control the pump start and stop on the set pressure, You may set-up time and pressure for this pump, it also could show flow rate and delivery height on the screen.

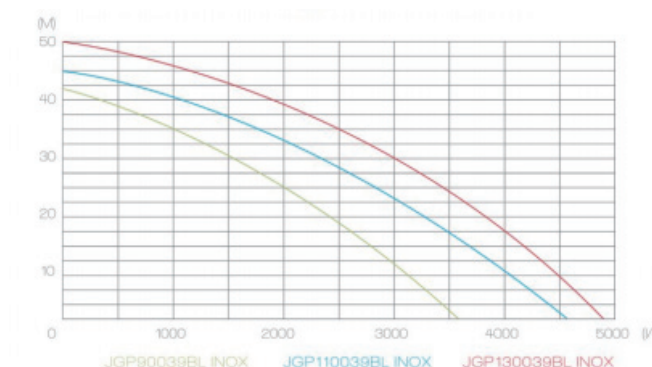

JGPXXX39BL INOX PRO



Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump motor cover and on/off waterproof switch.

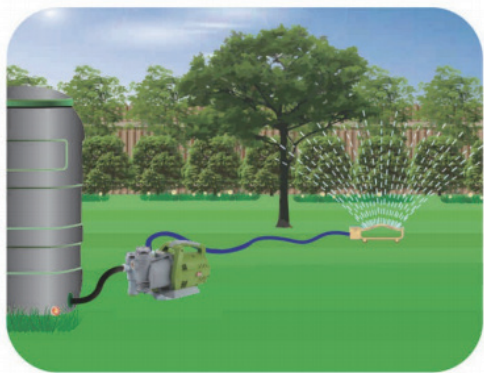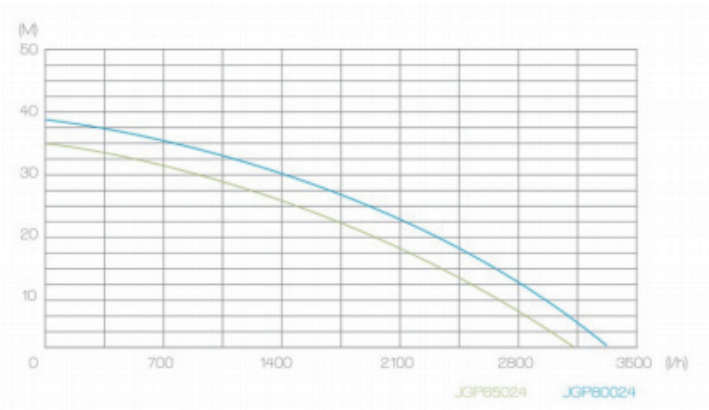

JGPXXX24




Specification

Junhe Model	JGP65024 PRO	JGP80024 PRO
Rated Power	900W	1100W
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.Pressure	3.8bar	4.2bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	46x26x32cm	46x26x32cm
Single gross weight	8.4kg	8.8kg
Qty/20'GP	736pcs	736pcs

Specification


Junhe Model	JGP65024INOX PRO	JGP80024INOX PRO
Rated Power	650W	800W
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.Pressure	3.8bar	4.2bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	46x26x32cm	46x26x32cm
Single gross weight	8.5kg	9kg
Qty/20'GP	736pcs	736pcs

Garden jet pump with plastic pump head and built-in water filter on head for clean water application ,The stainless steel casing is only for decoration purpose.It has plastic pump handle and plastic pump motor cover and on/off waterproof switch.

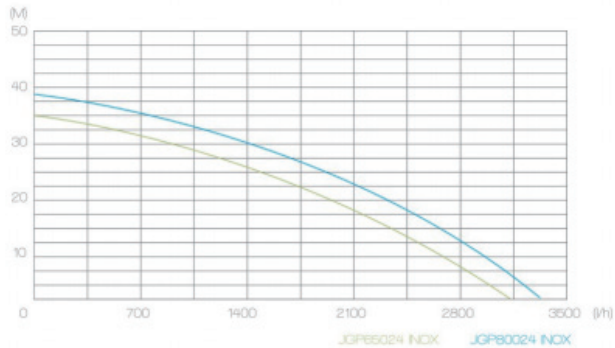

JGPXXX24 INOX







Garden jet pump with plastic pump head and built-in water filter on head for clean water application. It has plastic pump handle and plastic pump motor cover and on/off waterproof switch.



JGPXXX22

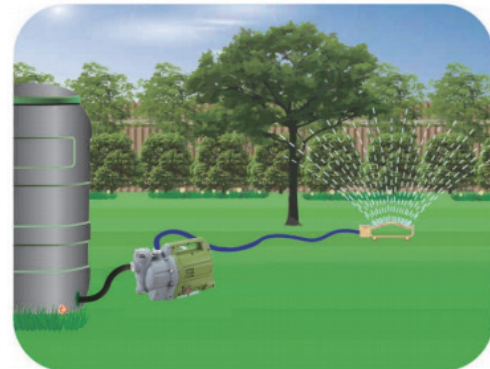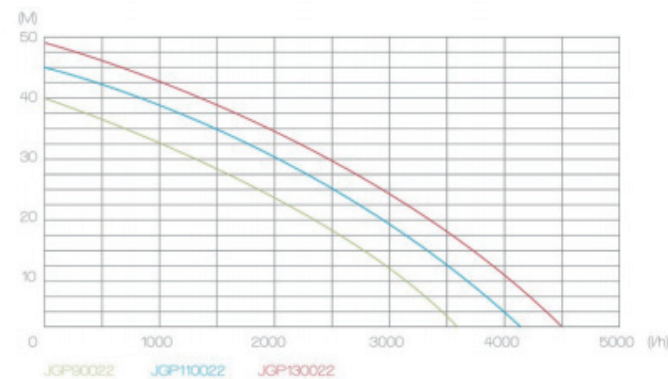


Specification

Junhe Model	JGP90022	JGP110022	JGP130022
Rated Power	900W	1100W	1300W
Max.Head	40m	45m	48m
Max.flow rate	3600 l/h	4200 l/h	4500 l/h
Max.Pressure	4.0bar	4.5bar	4.8bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x25.5x29cm	48.5x25.5x29cm	48.5x25.5x29cm
Single gross weight	10.4kg	11.5kg	12.1kg
Qty/20'GP	780pcs	780pcs	780pcs


Specification

Junhe Model	JGP6005HT	JGP8005HT
Rated Power	600W	800W
Max.Head	35m	38m
Max.flow rate	3000 l/h	3200 l/h
Max.Pressure	3.5bar	3.8bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC
Single gift box size	38x22.5x28cm	38x22.5x28cm
Single gross weight	8.5kg	9.9kg
Qty/20'GP	1170pcs	1170pcs

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

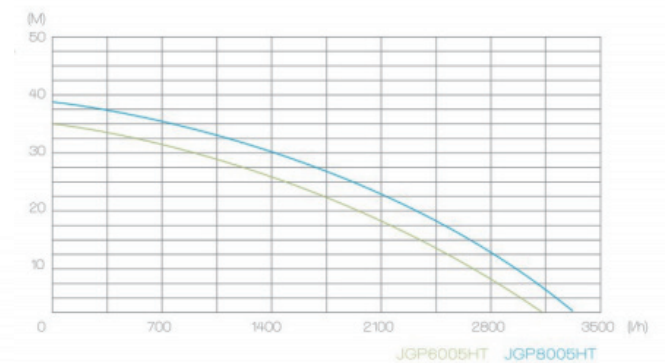



JGPXXX5HT

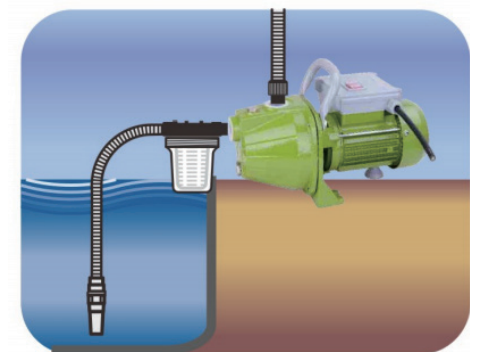

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.



JGPXXX7HT

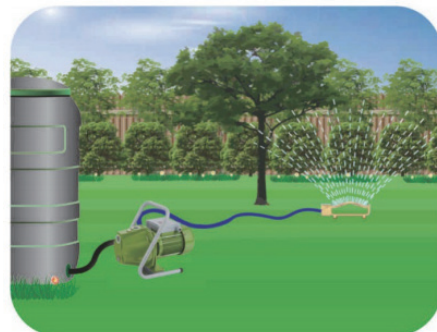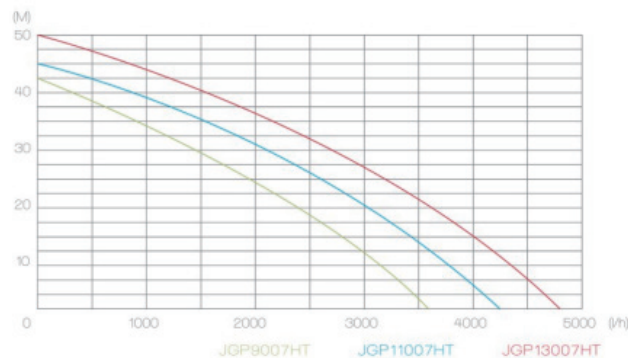


Specification

Junhe Model	JGP9007HT	JGP11007HT	JGP13007HT
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.Pressure	4.2bar	4.5bar	5.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	8.8kg	10kg	11.2kg
Qty/20'GP	1386pcs	1386pcs	1386pcs


Specification

Junhe Model	JGP80021HT	JGP110021HT
Rated Power	800W	1100W
Max.Head	40m	45m
Max.flow rate	3600 l/h	4200 l/h
Max.Pressure	4.0bar	4.5bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm²	HO7RN-F3G1.0mm²
Qty of Impeller	1PC	1PC
Single gift box size	45x22x23.5cm	45x22x23.5cm
Single gross weight	14.3kg	15.7kg
Qty/20'GP	1200pcs	1200pcs



Garden jet pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

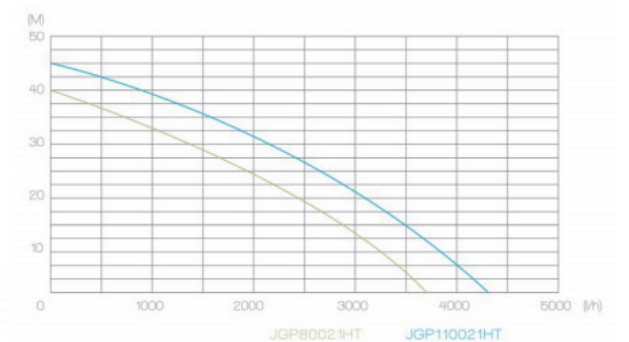


JGPXXX21HT

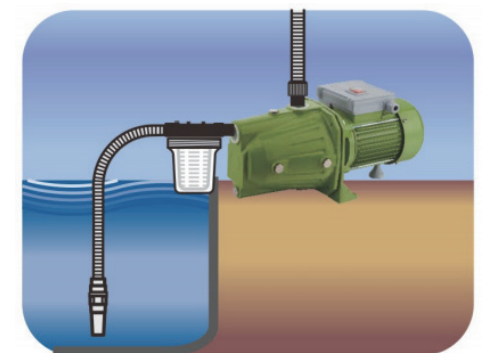

Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

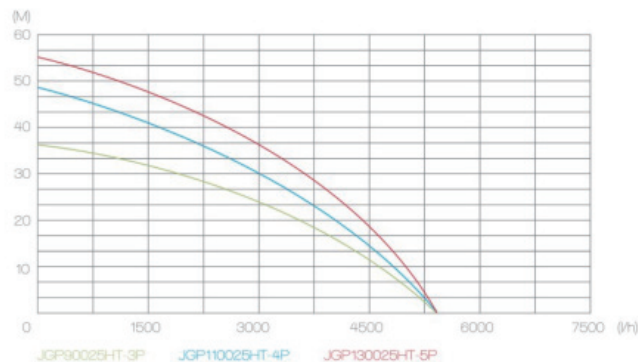

JGPXXX25HT-XP

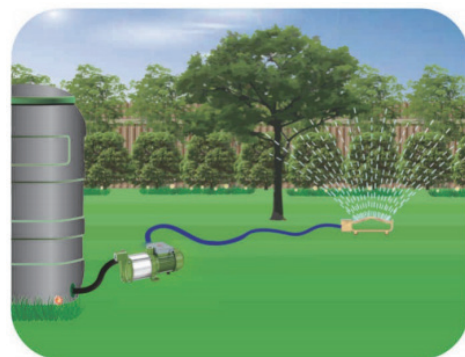

Specification

Junhe Model	JGP90025HT-3P	JGP110025HT-4P	JGP130025HT-5P
Rated Power	900W	1100W	1300W
Max.Head	36m	46m	55m
Max.flow rate	5400 l/h	5400 l/h	5400 l/h
Max.Pressure	3.6bar	4.6bar	5.5bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	45x22x27cm	45x22x27cm	45x22x27cm
Single gross weight	12.5kg	13.8kg	14.4kg
Qty/20'GP	1048pcs	1002pcs	1002pcs


Specification

Junhe Model	JGP6001INOX PRO	JGP8001INOX PRO	JGP10001INOX PRO	JGP12001INOX PRO
Rated Power	600W	800W	1000W	1200W
Vol&Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.Pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise(dB)	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.1kg	7.3kg	8.2kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs



JGPXXX1 INOX PRO


Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off water proof switch. This type of garden jet pumps are very easy to install and operate.

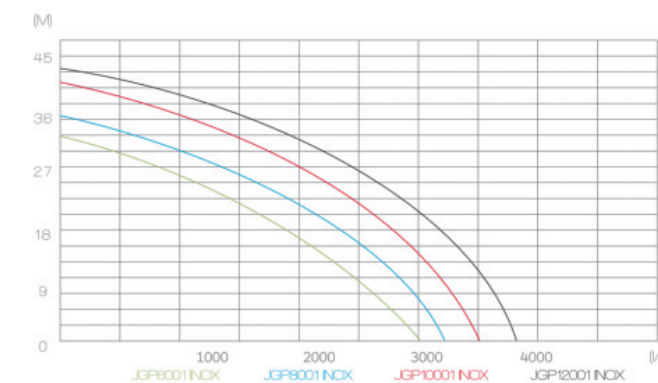



JGPXXX3 PRO

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

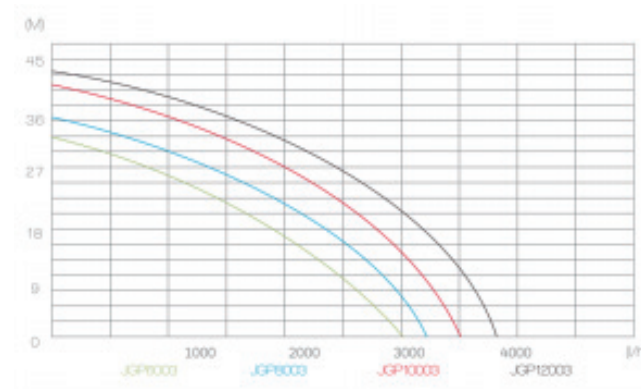

Specification




Junhe Model	JGP6003 PRO	JGP8003 PRO	JGP10003 PRO	JGP12003 PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	3000 l/h	3200 l/h	3500 l/h	3700 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.3kg	7.7kg	8.4kg	8.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs





JGPXXX1W INOX PRO

Garden jet pump with stainless steel pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

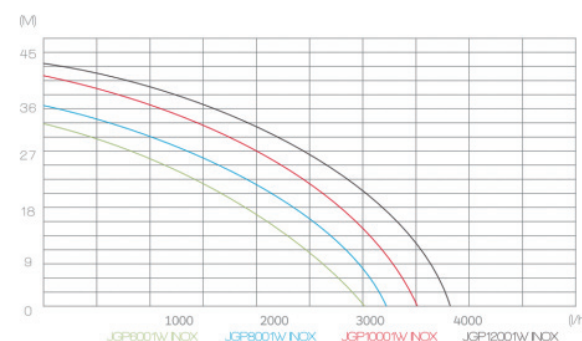

Specification

Junhe Model	JGP6001W INOX PRO	JGP8001W INOX PRO	JGP10001W INOX PRO	JGP12001W INOX PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Specification




Junhe Model	JGP6003W PRO	JGP8003W PRO	JGP10003W PRO	JGP12003W PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs



JGPXXX3W PRO


Garden jet pump with plastic pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pump sare very easy to install and operate.

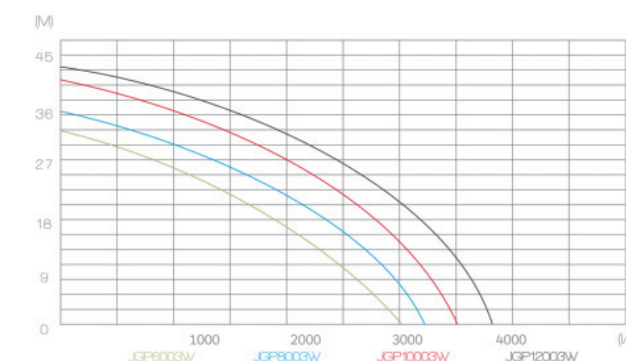



JGPXXX2 INOX PRO

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

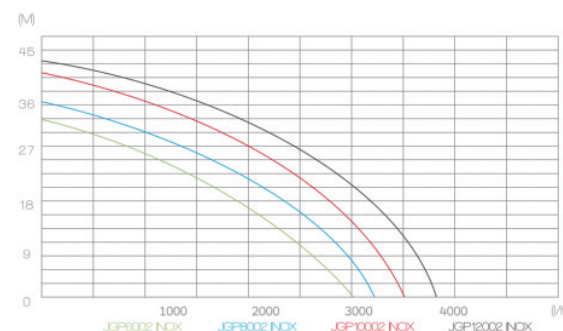

Specification

Junhe Model	JGP6002 INOX PRO	JGP8002 INOX PRO	JGP10002 INOX PRO	JGP12002 INOX PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Specification




Junhe Model	JGP6004 PRO	JGP8004 PRO	JGP10004 PRO	JGP12004 PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs



JGPXXX4 PRO


Garden jet pump with plastic pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

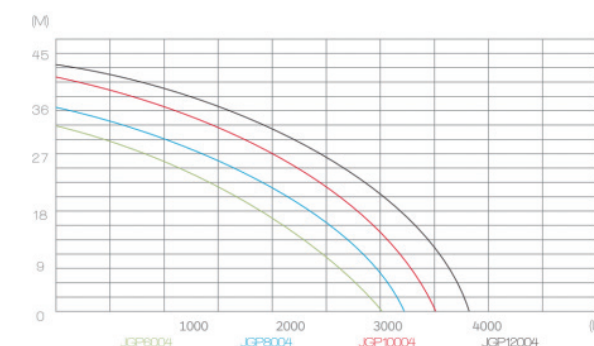



JGPXXX2F INOX PRO

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application . The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

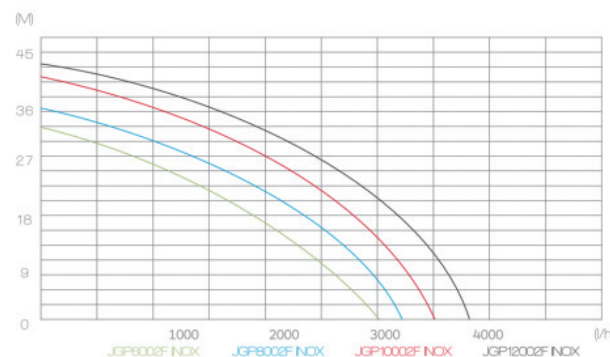

Specification

Junhe Model	JGP6002F INOX PRO	JGP8002F INOX PRO	JGP10002F INOX PRO	JGP12002F INOX PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm
Single gross weight	7.5kg	7.8kg	8.1kg	8.5kg
Qty/20'GP	898pcs	898pcs	898pcs	898pcs


Specification

Junhe Model	JGP6004F PRO	JGP8004F PRO	JGP10004F PRO	JGP12004F PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm	37.5x26x32cm
Single gross weight	7kg	7.3kg	7.6kg	8kg
Qty/20'GP	898pcs	898pcs	898pcs	898pcs



JGPXXX4F PRO


Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application.The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

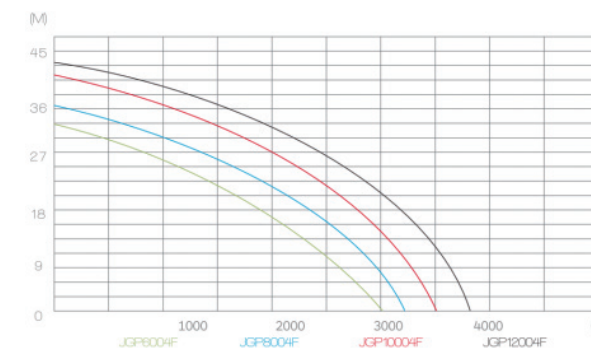



JGPXXX5 PRO

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application . The pump has equipped with on/off waterproof switch .This type of garden jet pumps are very easy to install and operate.

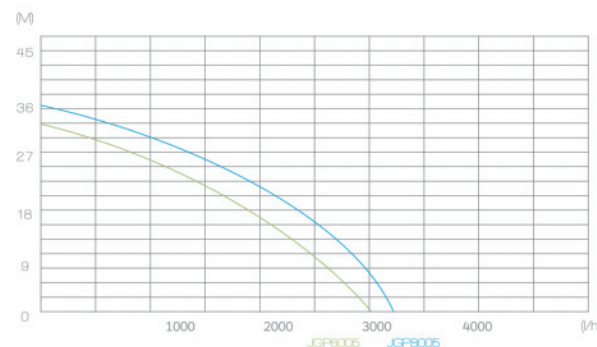

Specification

Junhe Model	JGP6005 PRO	JGP8005 PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.5kg	6.7kg
Qty/20'GP	1294pcs	1294pcs




Specification

Junhe Model	JGP6005 INOX PRO	JGP8005 INOX PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg
Qty/20'GP	1294pcs	1294pcs



JGPXXX5 INOX PRO


Garden jet pump with plastic pump head and stainless steel pump handle and aluminum motor housing and iron fan cover for clean water application.The pump has equipped with on/off waterproof switch . This type of garden jet pumps are very easy to install and operate.

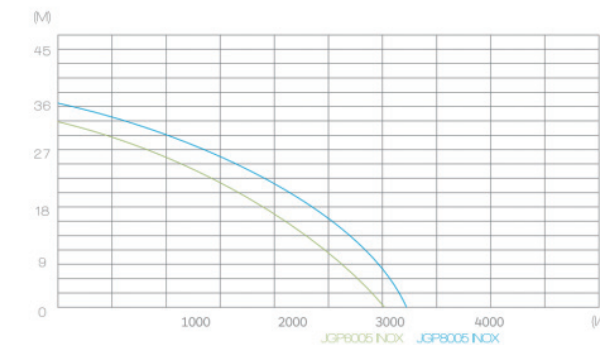



JGPXXX5 PRO

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application.The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

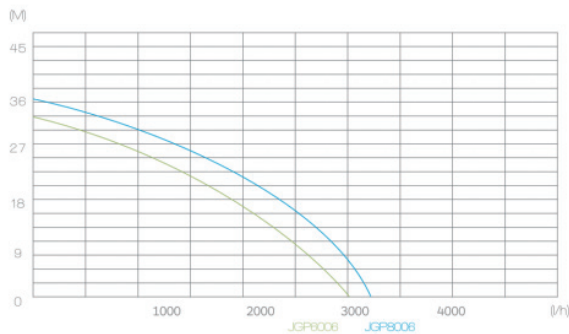

Specification

Junhe Model	JGP6006 PRO	JGP8006 PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 °C	35 °C
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.5kg	6.7kg
Qty/20'GP	1294pcs	1294pcs


Specification

Junhe Model	JGP6006 INOX PRO	JGP8006 INOX PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 °C	35 °C
Qty of Impeller	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg
Qty/20'GP	1294pcs	1294pcs



JGPXXX6 INOX PRO


Garden jet pump with plastic pump head and stainless steel pump handle and complete plastic motor housing cover for clean water application. The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

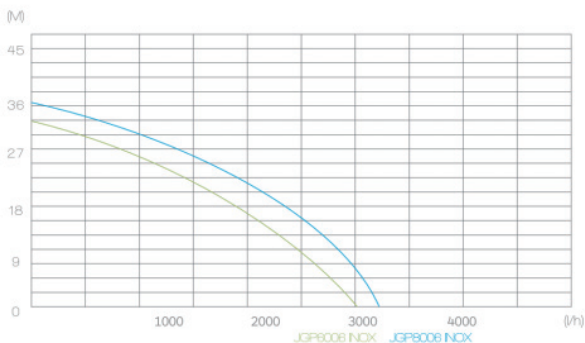



JGPXXX35 PRO

Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

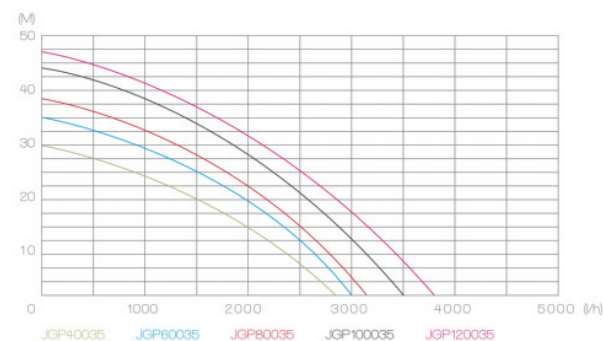

Specification

Junhe Model	JGP40035 PRO	JGP60035 PRO	JGP80035 PRO	JGP100035 PRO	JGP120035 PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	6.7kg	6.8kg	7kg	8.3kg	8.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs	1386pcs




Specification

Junhe Model	JGP40035 INOX PRO	JGP60035 INOX PRO	JGP80035 INOX PRO	JGP100035 INOX PRO	JGP120035 INOX PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm
Single gross weight	7kg	7.2kg	7.5kg	7.8kg	8.8kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs



JGPXXX35 INOX PRO


Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

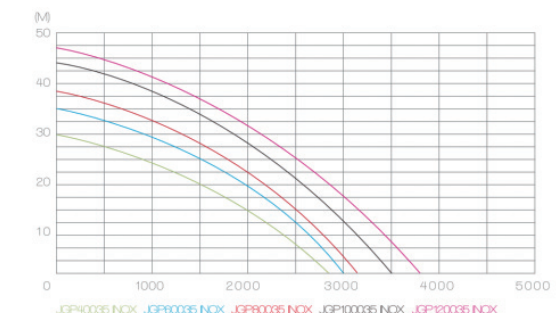



JGPXXX36 PRO

Garden jet pump with plastic pump head and plastic pump handle and complete plastic motor housing cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

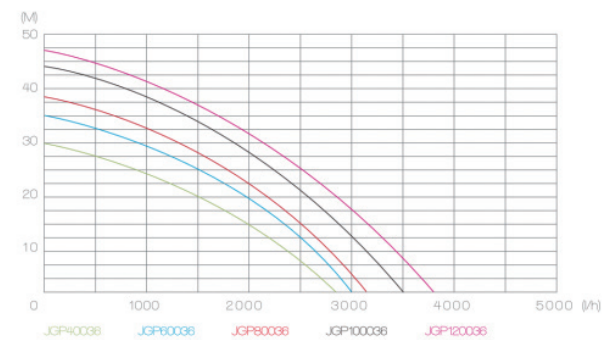

Specification




Junhe Model	JGP40036 PRO	JGP60036 PRO	JGP80036 PRO	JGP100036 PRO	JGP120036 PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg	7.5kg	7.8kg	8.2kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs





JGPXXX36 INOX PRO

Garden jet pump with stainless steel pump head and plastic pump handle and complete plastic motor housing cover for clean water application . The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

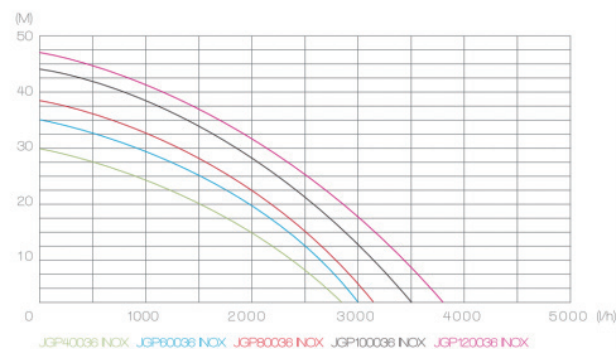

Specification

Junhe Model	JGP40036 INOX PRO	JGP60036 INOX PRO	JGP80036 INOX PRO	JGP100036 INOX PRO	JGP120036 INOX PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Single gift box size	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm	37x22.5x26cm
Single gross weight	6.9kg	7.2kg	7.5kg	7.8kg	8.8kg
Qty/20'GP	1293pcs	1293pcs	1293pcs	1293pcs	1293pcs




Specification

Junhe Model	JGP40049 PRO	JGP60049 PRO	JGP80049 PRO
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	36m	43m
Max.flow rate	3600 l/h	4600 l/h	5000 l/h
Max.suction height	8m	8m	8m
Max.pressure	3.0bar	3.6bar	4.3bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	35x23x30cm	35x23x30cm	35x23x30cm
Single gross weight	6.1kg	6.4kg	6.7kg
Qty/20'GP	1160pcs	1160pcs	1160pcs



JGPXXX49 PRO


Garden jet pump with plastic pump head and plastic pump handle and aluminum motor housing and plastic fan cover for clean water application .The pump has equipped with on/off waterproof switch.This type of garden jet pumps are very easy to install and operate.

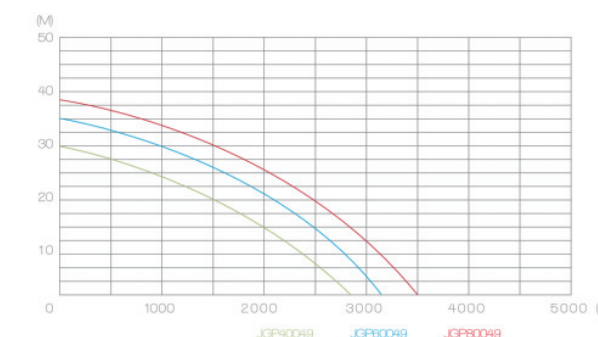



JGPXXX49 INOX PRO

Garden jet pump with plastic pump head with stainless steel casing and plastic pump handle and aluminum motor housing and plastic fan cover for clean water application .The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

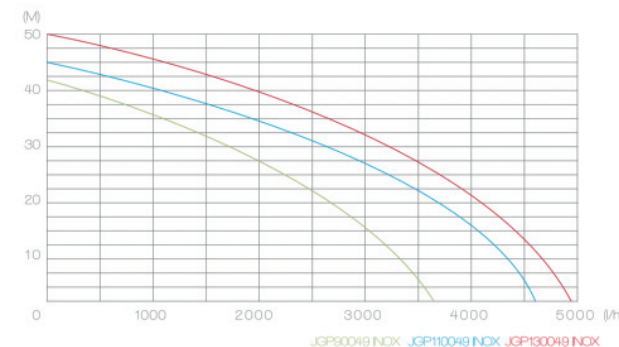

Specification

Junhe Model	JGP90049 INOX PRO	JGP110049 INOX PRO	JGP130049 INOX PRO
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	44m	48m	53m
Max.flow rate	6500 l/h	7000 l/h	7500 l/h
Max.suction height	8m	8m	8m
Max.pressure	4.4bar	4.8bar	5.3bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 °C	35 °C	35 °C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	38x24.5x31.5cm	38x24.5x31.5cm	38x24.5x31.5cm
Single gross weight	7.5kg	8.1kg	8.5kg
Qty/20'GP	954pcs	954pcs	954pcs


Specification


Junhe Model	JGP9007 INOX PRO	JGP11007 INOX PRO	JGP13007 INOX PRO
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.suction height	8m	8m	8m
Max.pressure	4.8bar	5.0bar	5.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 °C	35 °C	35 °C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	40x22x23.5cm	40x22x23.5cm	40x22x23.5cm
Single gross weight	7.8kg	8.3kg	8.8kg
Qty/20'GP	1353pcs	1353pcs	1353pcs



JGPXXX7 INOX PRO


Garden jet pump with stainless steel pump head and plastic pump handle and aluminum motor housing and iron fan cover for clean water application The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

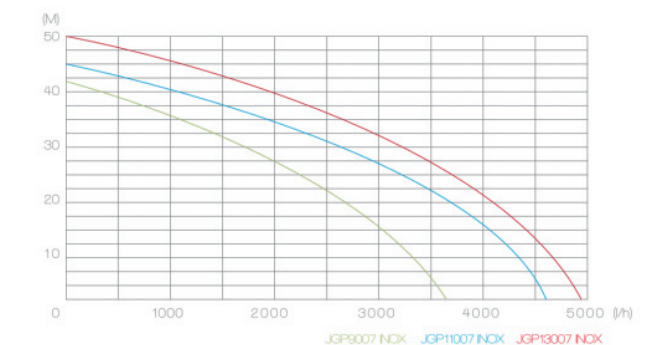



JGPXXX8 INOX PRO

Garden jet pump with stainless pump head and plastic pump handle and complete plastic motor housing cover for clean water application .The pump has equipped with on/off waterproof switch. This type of garden jet pump sare very easy to install and operate.

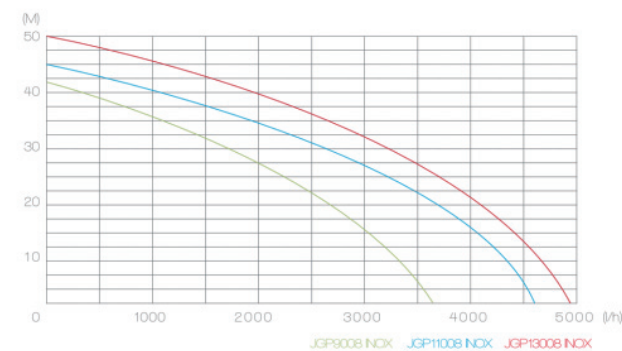

Specification

Junhe Model	JGP9008 INOX PRO	JGP11008 INOX PRO	JGP13008 INOX PRO
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.suction height	8m	8m	8m
Max.pressure	4.8bar	5.0bar	5.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x28x34cm	39x28x34cm	39x28x34cm
Single gross weight	7.7kg	8.0kg	8.2kg
Qty/20'GP	754pcs	754pcs	754pcs




Specification

Junhe Model	JGP6001HT PRO	JGP8001HT PRO	JGP10001HT PRO	JGP12001HT PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	8.7kg	9kg	9.3kg	9.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs



JGPXXX1 HT PRO


Garden jet pump with cast iron pump head and plastic pump handle and aluminum motor housing and iron fancover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

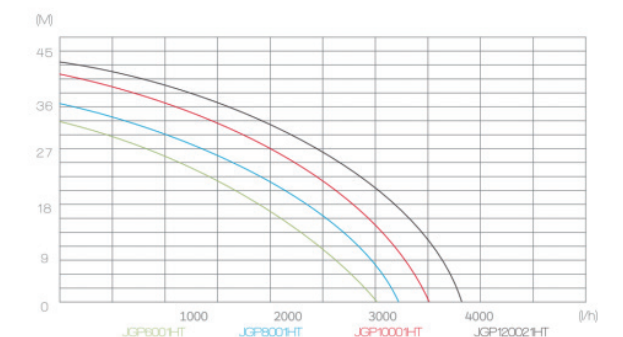



JGPXXX1 WHT PRO

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pump sare very easy to install and operate.

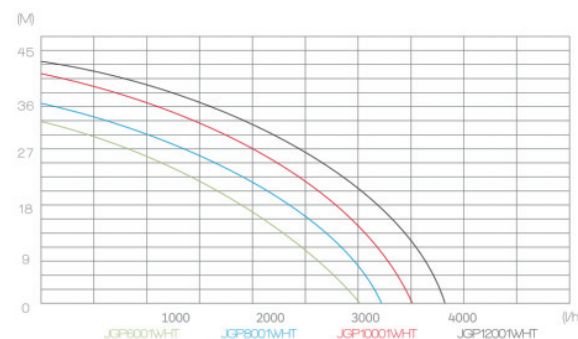

Specification

Junhe Model	JGP6001WHT PRO	JGP8001WHT PRO	JGP10001WHT PRO	JGP12001WHT PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Single gift box size	37x21x26cm	37x21x26cm	37x21x26cm	37x21x26cm
Single gross weight	8.7kg	9kg	9.3kg	9.6kg
Qty/20'GP	1386pcs	1386pcs	1386pcs	1386pcs

Specification




Junhe Model	JGP40041HT PRO	JGP60041HT PRO	JGP80041HT PRO
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.suction height	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x20x27cm	39x20x27cm	39x20x27cm
Single gross weight	8.4kg	8.7kg	9kg
Qty/20'GP	1333pcs	1333pcs	1333pcs



JGPXXX41 HT PRO


Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application . The pump has equipped with on off Waterproof switch. This type of garden jet pumps are very easy to install and operate.

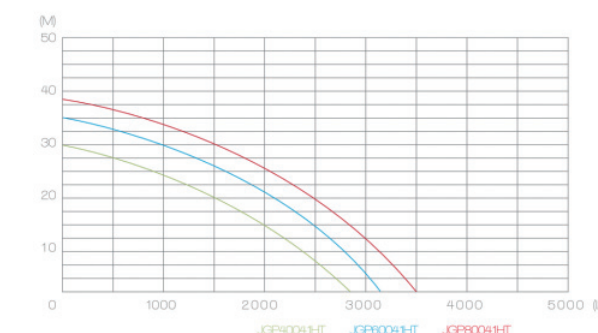



JGPXXX41 HT PRO

Garden jet pump with cast iron pump head and iron pump handle and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

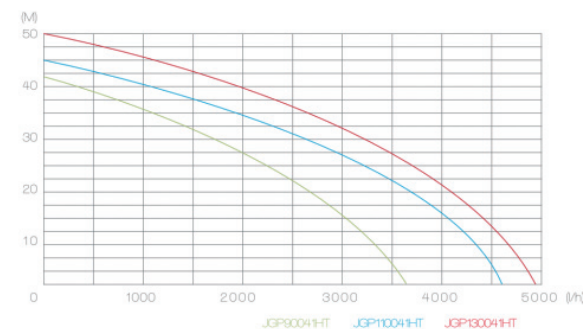

Specification

Junhe Model	JGP90041HT PRO	JGP10041HT PRO	JGP130041HT PRO
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.suction height	8m	8m	8m
Max.pressure	4.8bar	5.0bar	5.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	39x20x27cm	39x20x27cm	39x20x27cm
Single gross weight	9.5kg	9.8kg	10kg
Qty/20'GP	1333pcs	1333pcs	1333pcs


Specification

Junhe Model	JGP90015-3P	JGP110015-4P	JGP130015-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400 l/h	5400 l/h	5400 l/h
Max.suction height	8m	8m	8m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	46x28x29cm	46x28x29cm	46x28x29cm
Single gross weight	10.8kg	11.7kg	12.7kg
Qty/20'GP	749pcs	749pcs	749pcs



JGPXXX15-XP


Multi-stage impeller garden jet pump with plastic pump head with stainless steel casing on pump head and plastic pump handle and aluminum motor housing and iron fancover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

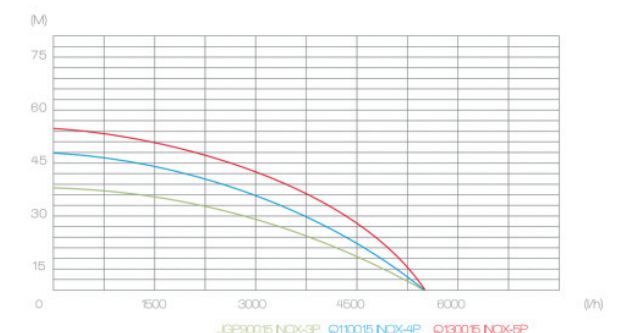



CMPXXX-XP

Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

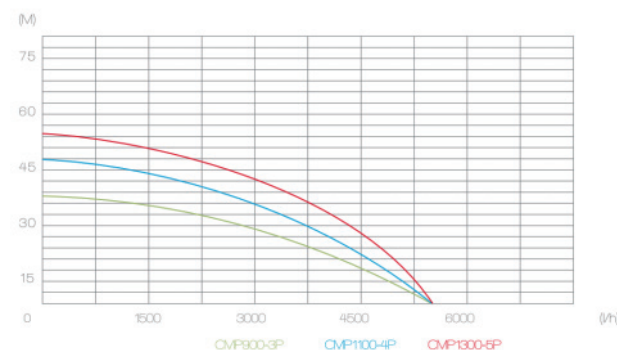

Specification

Junhe Model	CMP900W-3P	CMP1100W-4P	CMP1300W-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	6000 l/h	6000 l/h	6000 l/h
Max.suction height	1.5m	1.5m	1.5m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	42x22x27cm	45x22x27cm	47x22x27cm
Single gross weight	13.3kg	14.5kg	15.3kg
Qty/20'GP	1122pcs	1047pcs	1002pcs




Specification

Junhe Model	CMP900W-3P	CMP1100W-4P	CMP1300W-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	6000 l/h	6000 l/h	6000 l/h
Max.suction height	1.5m	1.5m	1.5m
Max.pressure	3.5bar	4.6bar	5.5bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	3PCS	4PCS	5PCS
Single gift box size	44x23.5x29cm	46x23.5x29cm	48x23.5x29cm
Single gross weight	14.2kg	15kg	15.8kg
Qty/20'GP	933pcs	893pcs	855pcs



CMPXXXW-XP


Multi-stage impeller garden jet pump with cast iron pump head with stainless steel casing on pump head and iron pump handle and aluminum motor housing and iron fancover for clean water application. The pump has equipped with on/off waterproof switch. This type of garden jet pumps are very easy to install and operate.

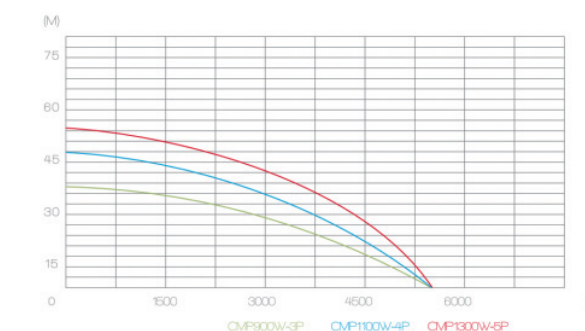



QBXXXHT

Peripheral pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application. It is the best entry basic level product in worldwide.

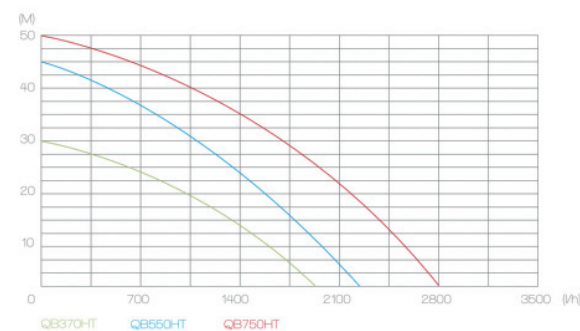

Specification

Junhe Model	QB370HT	QB550HT	QB750HT
Rated Power	350W	550W	750W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	45m	50m
Max.flow rate	1900 l/h	2200 l/h	2800 l/h
Max.suction height	8m	8m	8m
Max.pressure	3bar	4.5bar	5bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G0.75mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	27x21x20cm	32x21x20cm	27x21x20cm
Single gross weight	5.5kg	7kg	7.5kg
Qty/20'GP	2468pcs	2083pcs	1348pcs


Specification

Junhe Model	AUJDP800HT	AUJDP1100HT
Rated Power	800W	1100W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	45m	56m
Max.flow rate	2400 l/h	2600 l/h
Max.suction height	20m	25m
Max.pressure	2.2bar	3.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1" 1/4"	G1", G1 1/4"
Cable specification	H07RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Pressure tank volume	24L	24L
Single gift box size	40.5x35x26cm	40.5x35x26cm
Single gross weight	16.1kg	17.2kg
Qty/20'GP	760pcs	760pcs



AUDJPXXXHT


Garden jet pump equipped with an injector for high suction purpose and applied for clean water. Cast iron pump head, aluminum motor housing and fan cover. This pump has also included both pressure gauge and mechanical pressure control switch.

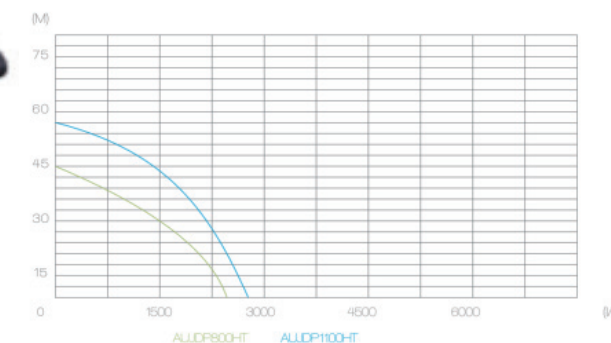




CPXXXHT

Centrifugal pump with cast iron pump head and aluminum motor housing and iron fan cover for clean water application. The pump has equipped with on/off waterproof switch. This type of pumps are very easy to install and operate.

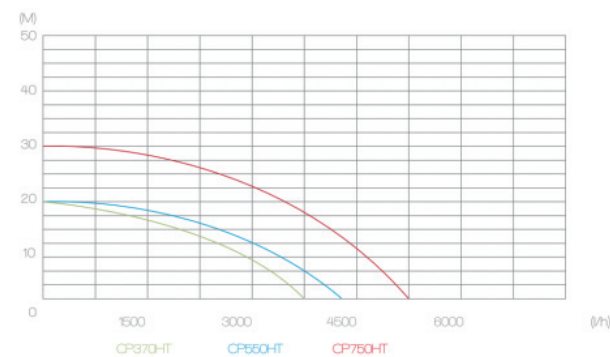

Specification

Junhe Model	CP370HT	CP550HT	CP750HT
Rated Power	370W	550W	750W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	20m	20m	30m
Max.flow rate	4000 l/h	4500 l/h	5000 l/h
Max.pressure	2.0bar	2.0bar	3.0bar
Max.grain size	1mm	1mm	1mm
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G0.75mm ²	H07RN-F3G0.75mm ²	H07RN-F3G0.75mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC
Single gift box size	33.5x23x27cm	33.5x23x27cm	33.5x23x27cm
Single gross weight	7.8kg	9.5kg	11.5kg
Qty/20'GP	1345pcs	1345pcs	1345pcs

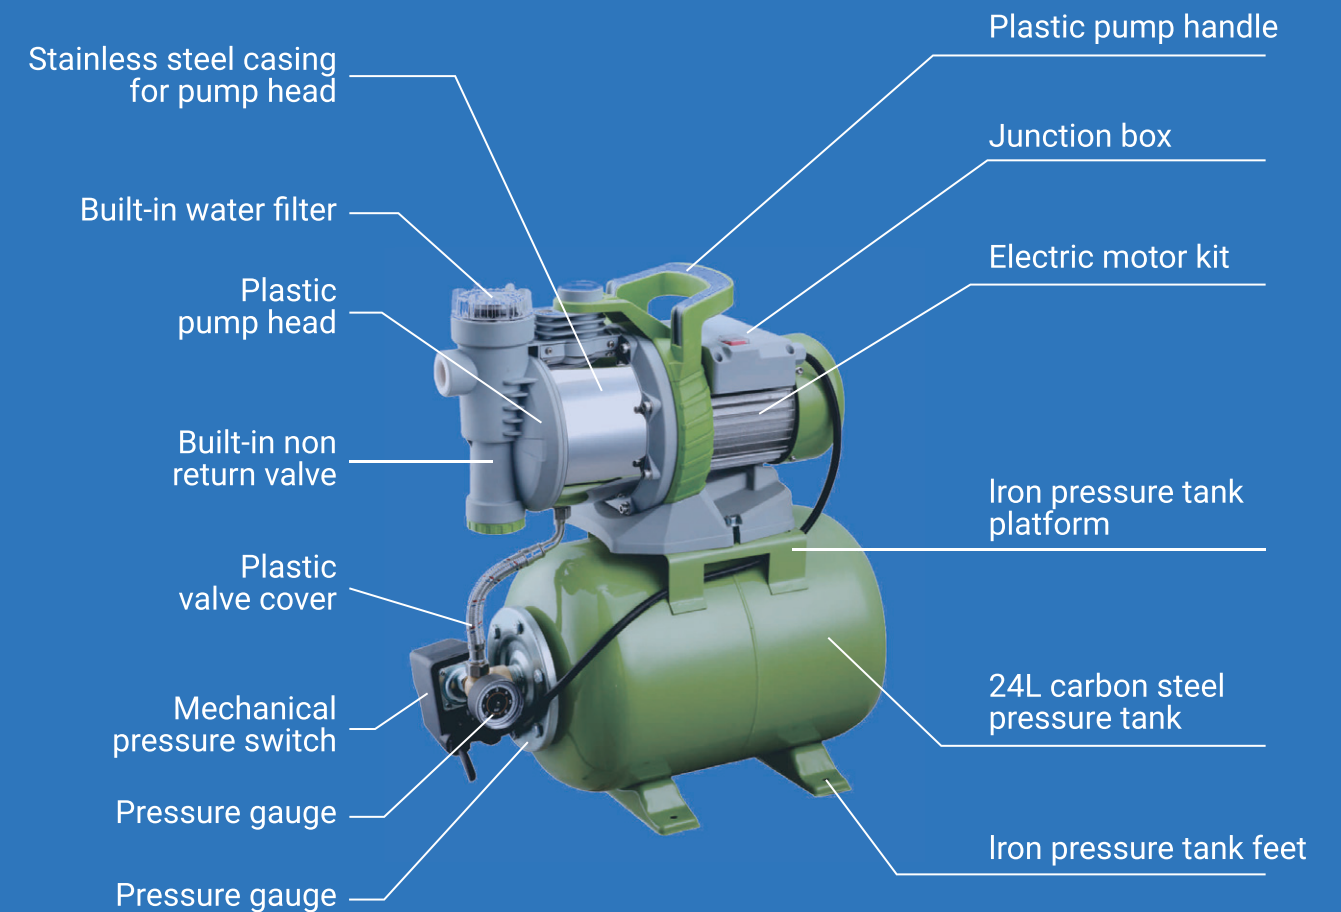



Automatic Booster System

Automatic booster system coupled with stainless steel pump head jet pump and large carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge.

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.



JGPXXX37C PRO

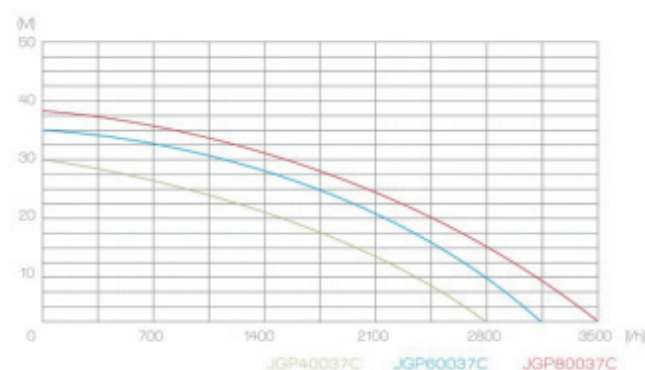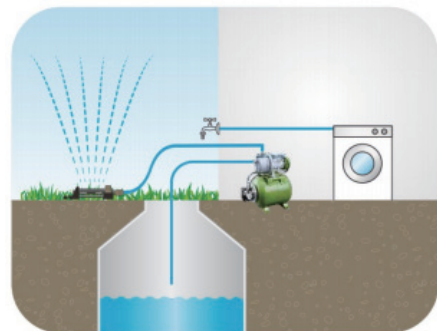

Specification

Junhe Model	JGP40037C PRO	JGP60037C PRO	JGP80037C PRO
Rated Power	400W	600W	800W
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.Pressure	3.0bar	3.8bar	4.2bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.5kg	12.2kg	13.3kg
Qty/20'GP	377pcs	377pcs	377pcs



Specification



Junhe Model	JGP40037CINOX PRO	JGP60037CINOX PRO	JGP80037CINOX PRO
Rated Power	400W	600W	800W
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.Pressure	3.0bar	3.8bar	4.2bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11kg	12kg	12.8kg
Qty/20'GP	377pcs	377pcs	377pcs





Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.



JGPXXX37C INOX PRO

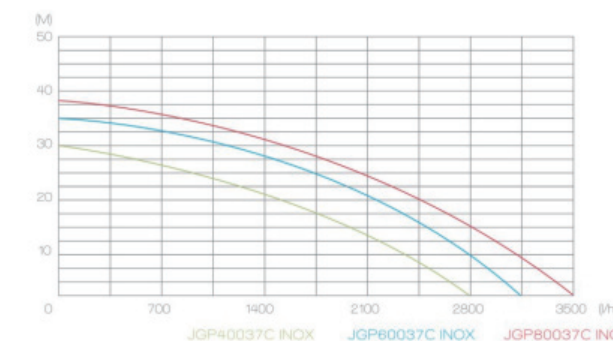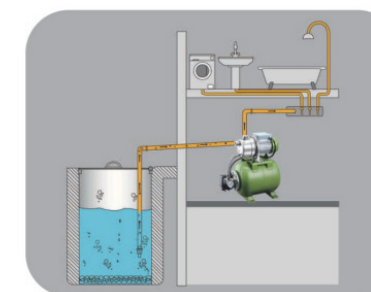

Automatic booster system coupled with plastic pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

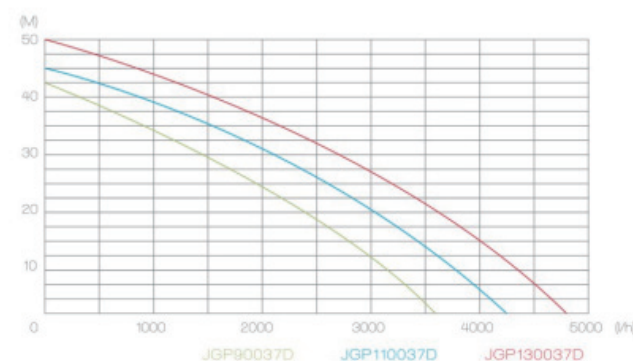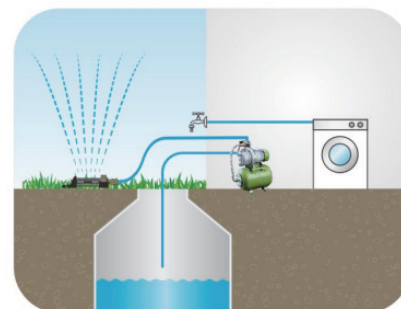

JGPXXX37D





Specification

Junhe Model	JGP90037D	JGP110037D	JGP130037D
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	55x32x61cm	55x32x61cm	55x32x61cm
Single gross weight	14kg	15.8kg	16.2kg
Qty/20'GP	260pcs	260pcs	260pcs



Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank, This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

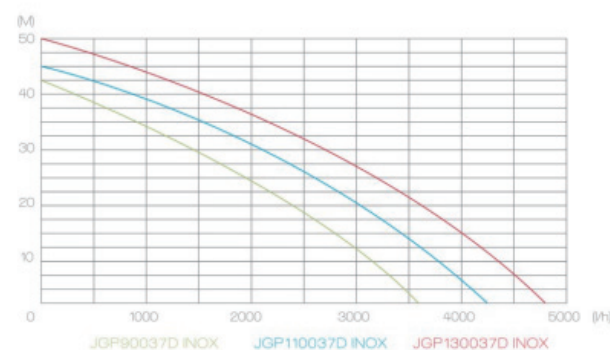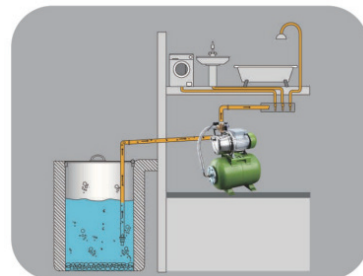

JGPXXX37D INOX



Specification


Junhe Model	JGP90037D INOX	JGP110037D INOX	JGP130037D INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	55x32x61cm	55x32x61cm	55x32x61cm
Single gross weight	14.5kg	16.5kg	17kg
Qty/20'GP	260pcs	260pcs	260pcs

Specification


Junhe Model	JGP40039C	JGP60039C	JGP80039C
Rated Power	400W	600W	800W
Max.Head	30m	35m	38m
Max.flow rate	2800 l/h	4100 l/h	4200 l/h
Max.Pressure	1.2-2.4bar	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x30x61cm	46x30x61cm	46x30x61cm
Single gross weight	12.1kg	13kg	13.5kg
Qty/20'GP	255pcs	255pcs	255pcs





Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

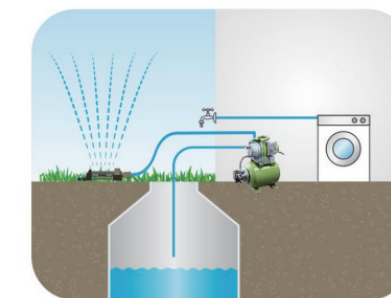

JGPXXX39C

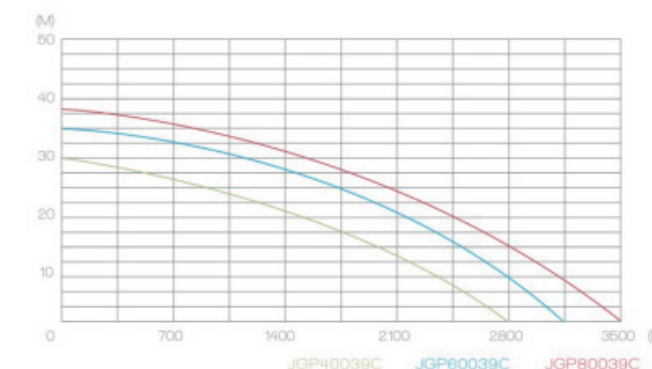

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

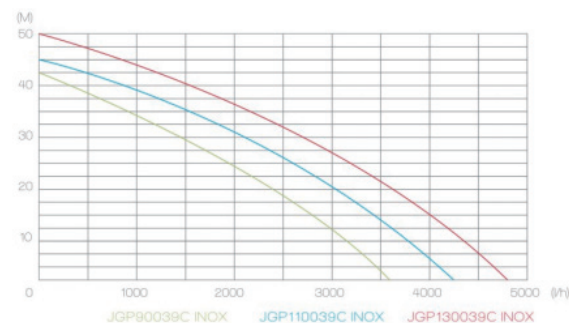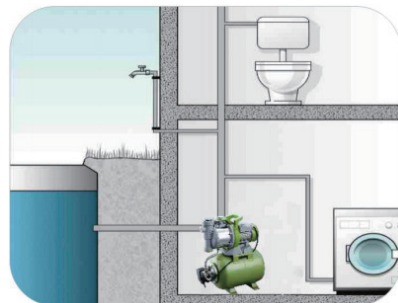

JGPXXX39C INOX



Specification

Junhe Model	JGP90039C INOX	JGP110039C INOX	JGP130039C INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4100 l/h	4200 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x30x61cm	46x30x61cm	46x30x61cm
Single gross weight	14.8kg	15.5kg	16.5kg
Qty/20'GP	255pcs	255pcs	255pcs

Specification



Junhe Model	JGP90039CS INOX	JGP110039CS INOX	JGP130039CS INOX
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4100 l/h	4200 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	46x30x61cm	46x30x61cm	46x30x61cm
Single gross weight	15kg	15.7kg	16.2kg
Qty/20'GP	255pcs	255pcs	255pcs

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L stainless steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

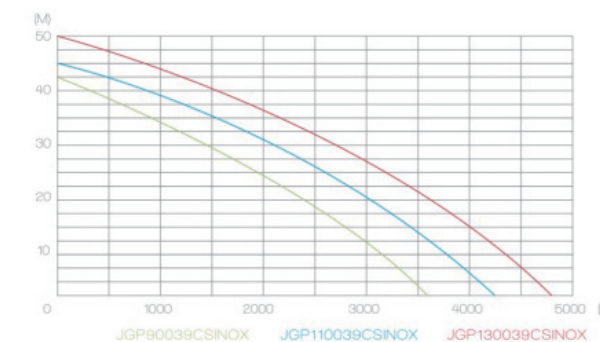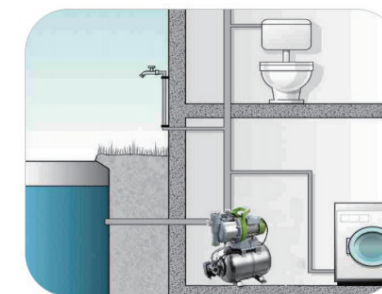

JGPXXX39CS INOX

Automatic booster system coupled with plastic pump head jet pump with built-in water filter on head and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

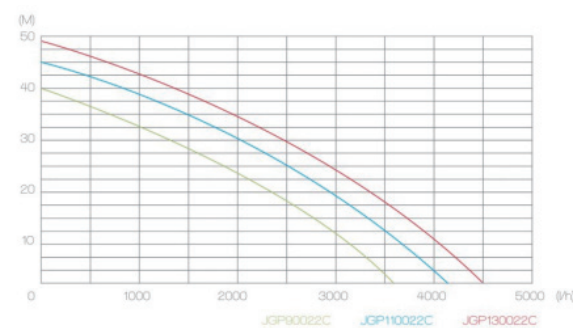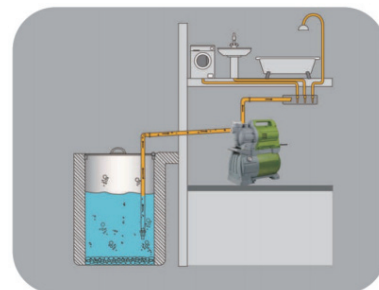

JGPXXX22C



Specification

Junhe Model	JGP90022C	JGP110022C	JGP130022C
Rated Power	900W	1100W	1300W
Max.Head	40m	45m	48m
Max.flow rate	3600 l/h	4200 l/h	4500 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	19L	19L	19L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	50x35x65cm	50x35x65cm	50x35x65cm
Single gross weight	15.7kg	16.2kg	16.8kg
Qty/20'GP	255pcs	255pcs	255pcs

Specification



Junhe Model	JGP65024C	JGP80024C
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000 l/h	3300 l/h
Max.Pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	53x32x63cm	53x32x63cm
Single gross weight	13.2kg	14kg
Qty/20'GP	262pcs	262pcs



Automatic booster system coupled with plastic pump head jet pump with built-in water filter on head and 24L carbon steel pressure tank.



JGPXXX24C

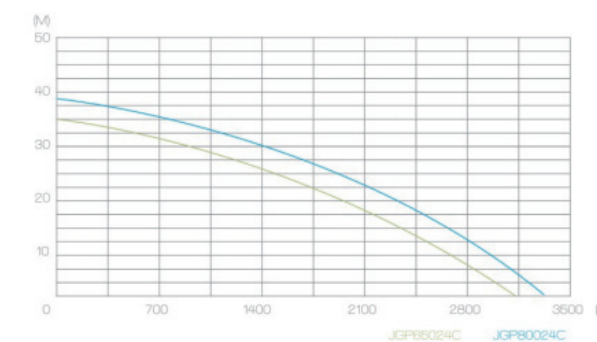
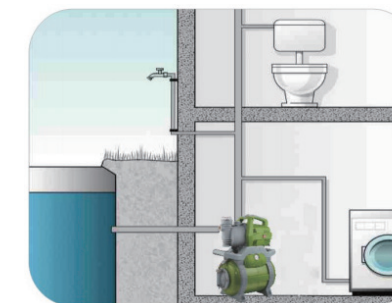


This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

Automatic booster system coupled with plastic pump head jet pump with built-in water filter and stainless steel casing on head and 24L carbon steel pressure tank.



JGPXXX24C INOX

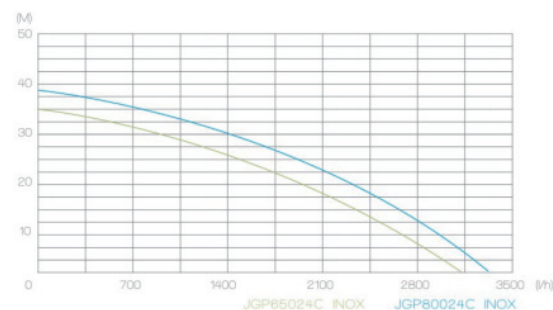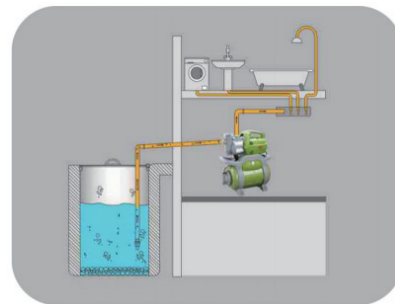

This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.



Specification


Junhe Model	JGP65024C INOX	JGP80024C INOX
Rated Power	650W	800W
Max.Head	35m	38m
Max.flow rate	3000 l/h	3300 l/h
Max.Pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	53x32x63cm	53x32x63cm
Single gross weight	13.5kg	14.3kg
Qty/20'GP	262pcs	262pcs

Specification


Junhe Model	JGP6005CHT	JGP8005CHT
Rated Power	600W	800W
Max.Head	35m	38m
Max.flow rate	3000 l/h	3200 l/h
Max.Pressure	1.3-2.6bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Pressure tank volume	19L	19L
Qty of Impeller	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm
Single gross weight	12.5kg	13.2kg
Qty/20'GP	377pcs	377pcs



Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It work svery silent and reliable and particularly suitable to increase pressure from a water system.

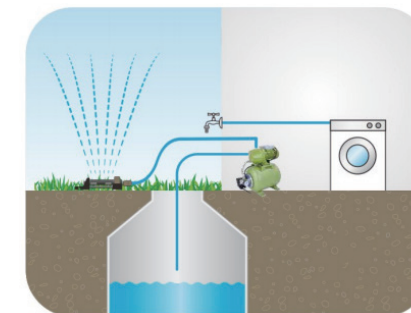



JGPXXX5C HT

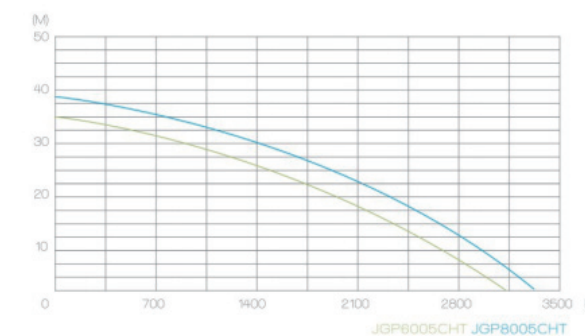

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.



JGPXXX7C HT

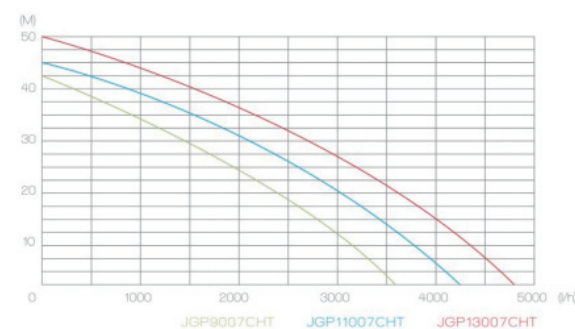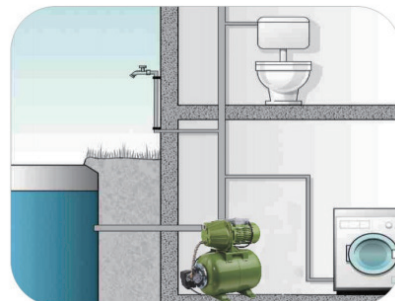

Specification




Junhe Model	JGP9007CHT	JGP11007CHT	JGP13007CHT
Rated Power	900W	1100W	1300W
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	1PC	1PC	1PC
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	13.7kg	14.5kg	15.2kg
Qty/20'GP	377pcs	377pcs	377pcs

Specification





Junhe Model	JGP80021DHT	JGP110021DHT
Rated Power	800W	1100W
Max.Head	40m	45m
Max.flow rate	3600 l/h	4200 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L
Qty of Impeller	1PC	1PC
Single gift box size	55x32x56cm	55x32x56cm
Single gross weight	18kg	21.4kg
Qty/20'GP	284pcs	284pcs

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

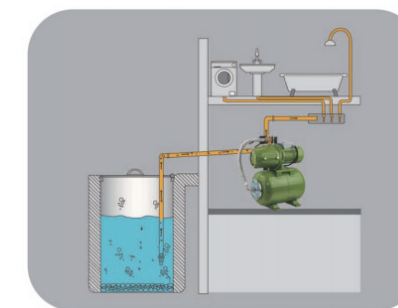

JGPXXX21D HT


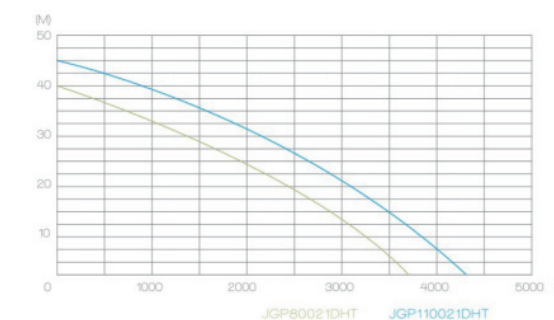




Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.



JGPXXX25D HT-XP

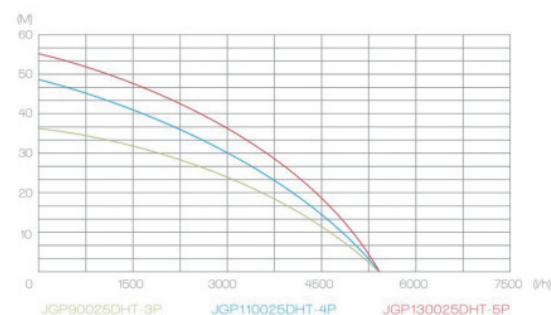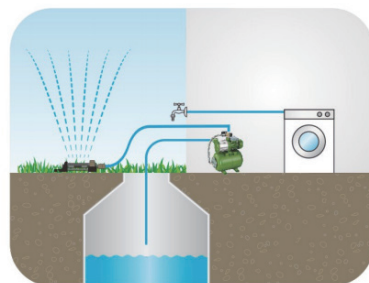

Specification

Junhe Model	JGP90025DHT-3P	JGP110025DHT-4P	JGP130025DHT-5P
Rated Power	900W	1100W	1300W
Max.Head	36m	46m	55m
Max.flow rate	5400 l/h	5400 l/h	5400 l/h
Max.Pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Pressure tank volume	24L	24L	24L
Qty of Impeller	3PC	3PC	3PC
Single gift box size	55x32x59cm	55x32x59cm	55x32x59cm
Single gross weight	17.2kg	18.3kg	21.5kg
Qty/20'GP	269pcs	269pcs	269pcs


Specification

Junhe Model	JGP6001CINOX PRO	JGP8001CINOX PRO	JGP10001CINOX PRO	JGP12001CINOX PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	13.7kg	14kg	14.3kg	14.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs



JGPXXX5C INOX PRO


Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

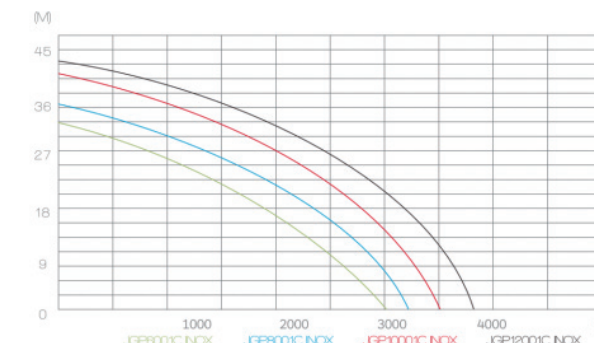



JGPXXX3C PRO

Automatic booster system coupled with plastic pumphead jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

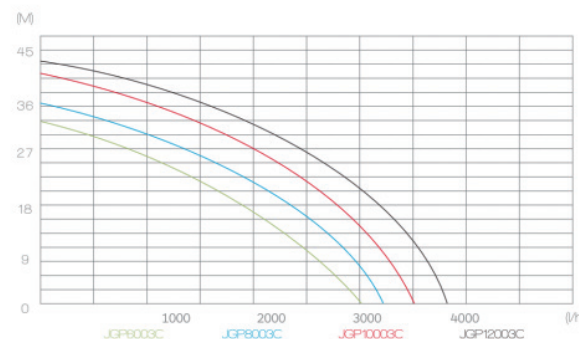

Specification

Junhe Model	JGP6003C PRO	JGP8003C PRO	JGP10003C PRO	JGP12003C PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	12.7kg	13kg	13.4kg	13.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs




Specification

Junhe Model	JGP6002C INOX PRO	JGP8002C INOX PRO	JGP10002C INOX PRO	JGP12002C INOX PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm
Single gross weight	13.7kg	14kg	14.3kg	14.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs



JGPXXX2C INOX PRO


Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

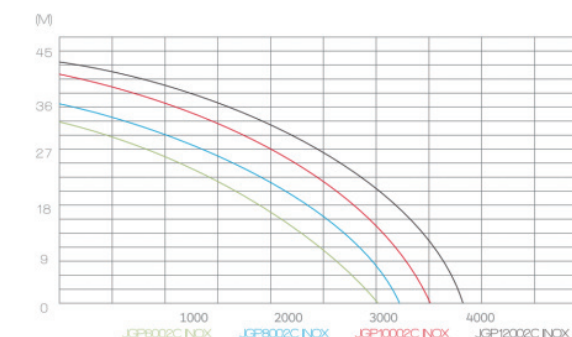



JGPXXX4C PRO

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

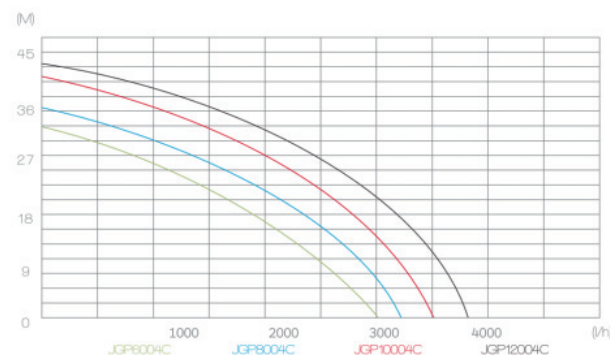

Specification

Junhe Model	JGP6004C PRO	JGP8004C PRO	JGP10004C PRO	JGP12004C PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm	46.5x28x51cm
Single gross weight	12.7kg	13kg	13.4kg	13.6kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs




Specification

Junhe Model	JGP6005C PRO	JGP8005C PRO
Rated Power	600W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35°C	35°C
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.58kg	12.2kg
Qty/20'GP	338pcs	338pcs



JGPXXX5C PRO


Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

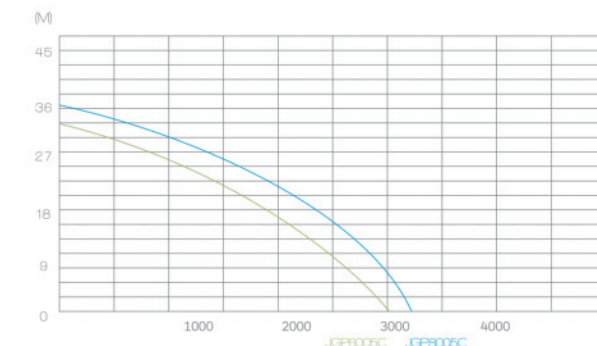



JGPXXX5C INOX PRO

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

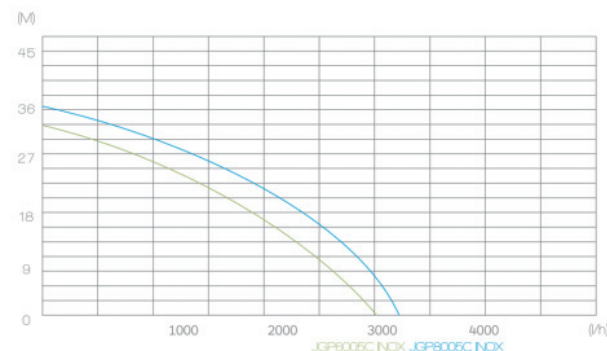

Specification

Junhe Model	JGP6005C INOX PRO	JGP8005C INOX PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.7kg	12.4kg
Qty/20'GP	338pcs	338pcs




Specification

Junhe Model	JGP6006C PRO	JGP8006C PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	HO7RN-F3G1.0mm ²	HO7RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.58kg	12.2kg
Qty/20'GP	338pcs	338pcs




JGPXXX6C PRO

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

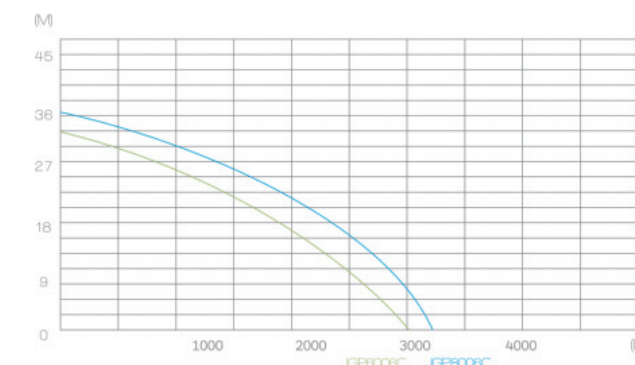


Automatic Booster System



JGPXXX6C INOX PRO

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

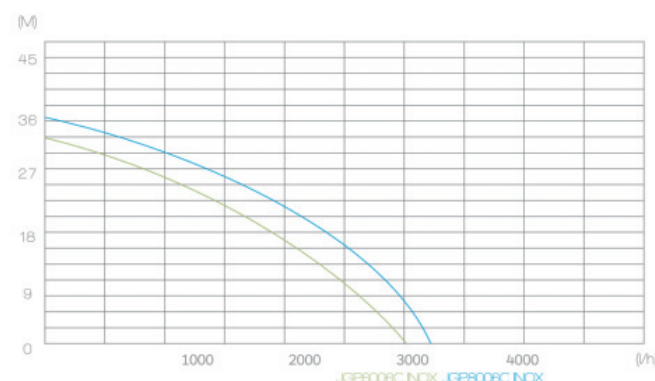

Specification

Junhe Model	JGP6006C INOX PRO	JGP8006C INOX PRO
Rated Power	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	38m	42m
Max.flow rate	4200 l/h	4800 l/h
Max.suction height	8m	8m
Max.pressure	3.8bar	4.2bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35 C	35 C
Qty of Impeller	1PC	1PC
Pressure tank volume	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.7kg	12.4kg
Qty/20'GP	338pcs	338pcs


Specification

Junhe Model	JGP40035C PRO	JGP60035C PRO	JGP80035C PRO	JGP100035C PRO	JGP12003C PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.2kg	11.8kg	12.4kg	13kg	13.8kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs



JGPXXX35C PRO


Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

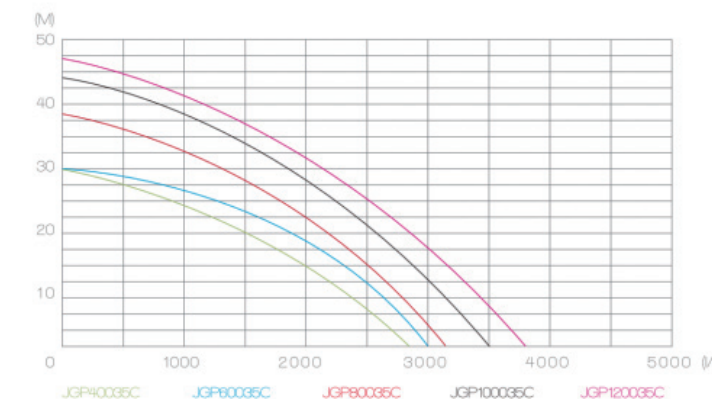



JGPXXX35C INOX PRO

Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

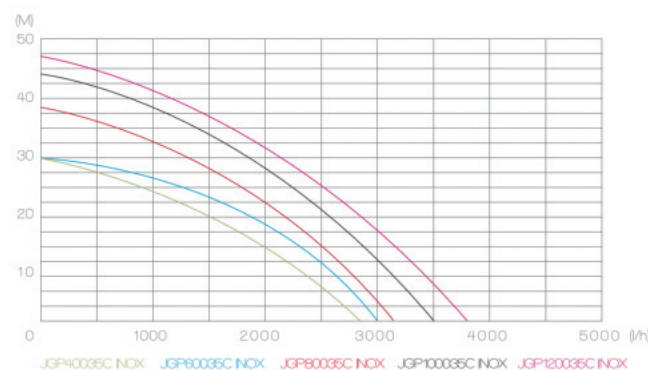

Specification

Junhe Model	JGP40035CINOX PRO	JGP60035CINOX PRO	JGP80035CINOX PRO	JGP100035CINOX PRO	JGP120035CINOX PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.5kg	12.1kg	12.7kg	13.3kg	14.1kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs

Specification




Junhe Model	JGP40036C PRO	JGP60036C PRO	JGP80036C PRO	JGP100036C PRO	JGP120036C PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²	H07RN-F3G1.0mm²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 C	35 C	35 C	35 C	35 C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.2kg	11.8kg	12.4kg	13kg	13.8kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs



JGPXXX36C PRO

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system,

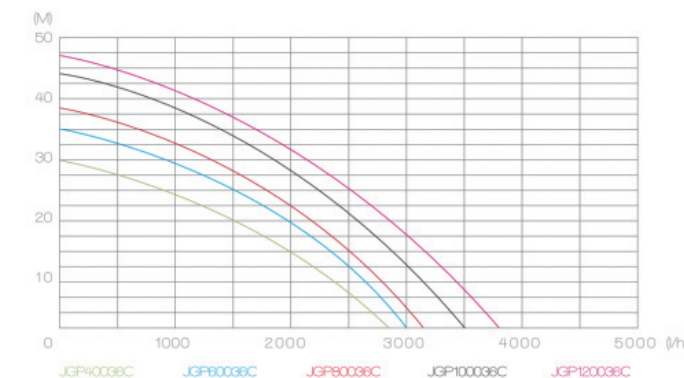




Specification

Junhe Model	JGP40036CINOX PRO	JGP60036CINOX PRO	JGP80036CINOX PRO	JGP100036CINOX PRO	JGP120036CINOX PRO
Rated Power	400W	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m	44m	46m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m	1m
Max.medium temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty of Impeller	1PC	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L	19L
Single gift box size	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm	48.5x30x57cm
Single gross weight	11.5kg	12.1kg	12.7kg	13.3kg	14.1kg
Qty/20'GP	338pcs	338pcs	338pcs	338pcs	338pcs



Automatic booster system coupled with stainless steel pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

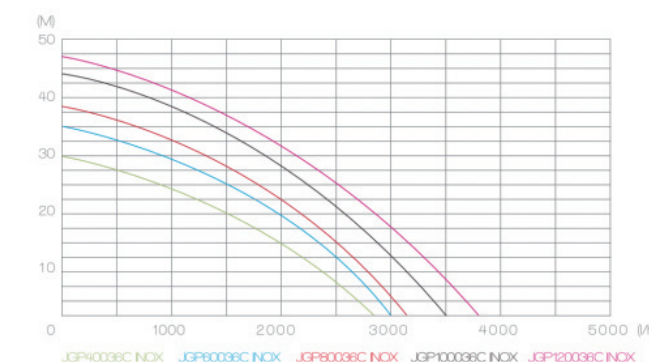


JGPXXX36C INOX PRO



JGPXXX49C PRO

Automatic booster system coupled with plastic pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

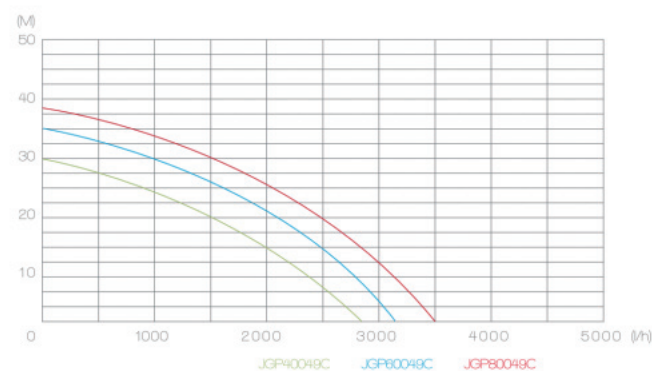

Specification

Junhe Model	JGP40049D INOX	JGP110049D INOX	JGP130049D INOX
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	2800 l/h	3000 l/h	3200 l/h
Max.suction height	7m	7m	7m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L
Single gift box size	48.5x30x60cm	48.5x30x60cm	48.5x30x60cm
Single gross weight	12.8kg	13.5kg	13.9kg
Qty/20'GP	320pcs	320pcs	320pcs




Specification

Junhe Model	JGP40049C PRO	JGP60049C PRO	JGP80049C PRO
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	36m	43m
Max.flow rate	3600 l/h	4600 l/h	5000 l/h
Max.suction height	8m	8m	8m
Max.pressure	3.0bar	3.6bar	4.3bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	10.5kg	11.7kg	12.4kg
Qty/20'GP	377pcs	377pcs	377pcs



JGPXXX49D INOX PRO

Automatic booster system coupled with plastic pump head and stainless steel casing on pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

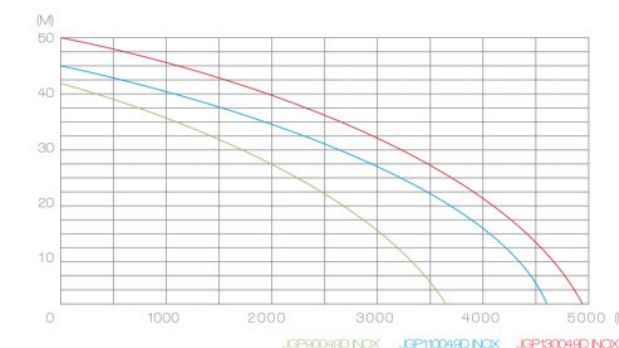


Automatic Booster System



JGPXXX7D INOX PRO

Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

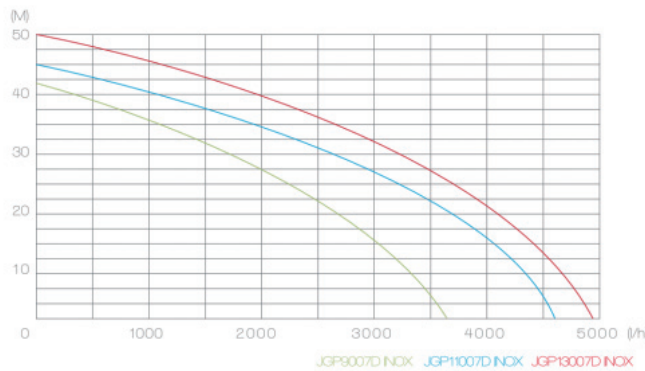

Specification

Junhe Model	JGP9007D INOX	JGP11007D INOX	JGP13007D INOX
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.suction height	8m	8m	8m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	14.5kg	15.4kg	16kg
Qty/20'GP	265pcs	265pcs	265pcs




Specification

Junhe Model	JGP9008D INOX	JGP11008D INOX	JGP13008D INOX
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	42m	45m	50m
Max.flow rate	3600 l/h	4600 l/h	4800 l/h
Max.suction height	8m	8m	8m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	14.5kg	15.4kg	16kg
Qty/20'GP	265pcs	265pcs	265pcs



JGPXXX8D INOX PRO


Automatic booster system coupled with stainless steel pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

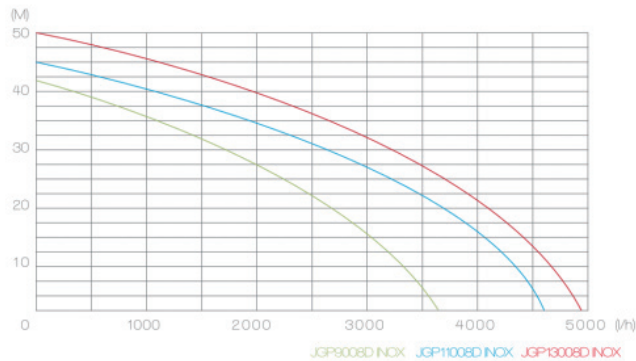



JGPXXX1 CHT PRO

Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from awater systemm.

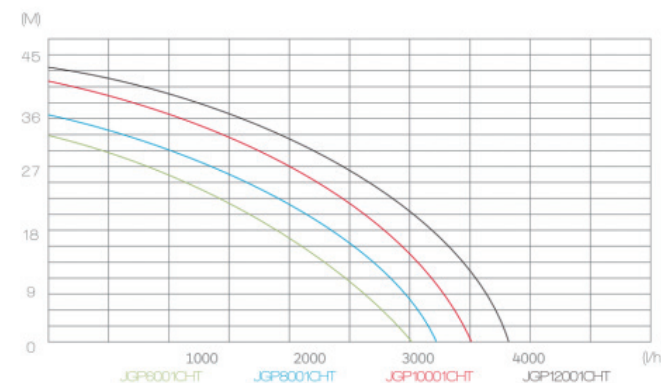

Specification

Junhe Model	JGP6001CHT PRO	JGP8001CHT PRO	JGP10001CHT PRO	JGP12001CHT PRO
Rated Power	600W	800W	1000W	1200W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	38m	44m	46m
Max.flow rate	4600 l/h	5000 l/h	5200 l/h	5300 l/h
Max.suction height	8m	8m	8m	8m
Max.pressure	3.5bar	3.8bar	4.4bar	4.6bar
Max.grain size	1mm	1mm	1mm	1mm
Max.Noise[dB]	85	85	85	85
Dia of connecting pipe	G1"	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.8kg	12kg	12.5kg	12.8kg
Qty/20'GP	377pcs	377pcs	377pcs	377pcs


Specification

Junhe Model	JGP40041CHT PRO	JGP60041CHT PRO	JGP80041CHT PRO
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	38m	42m
Max.flow rate	3500 l/h	4200 l/h	4800 l/h
Max.suction height	8m	8m	8m
Max.pressure	3.0bar	3.8bar	4.2bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	19L	19L	19L
Single gift box size	48.5x30x51cm	48.5x30x51cm	48.5x30x51cm
Single gross weight	11.8kg	12kg	12.5kg
Qty/20'GP	377pcs	377pcs	377pcs



JGPXXX41 CHT PRO


Automatic booster system coupled with cast iron pump head jet pump and 19L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

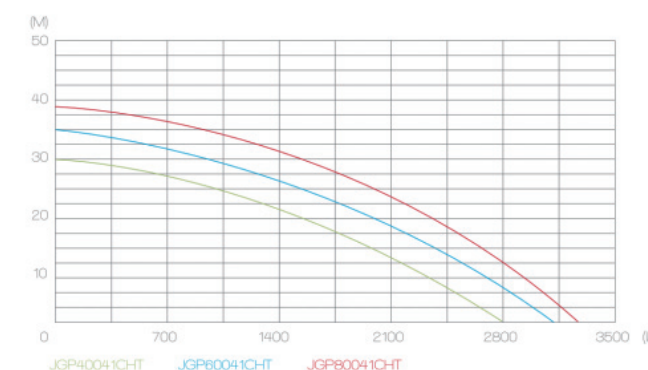



JGPXXX41 CHT PRO

Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from awater systeme.

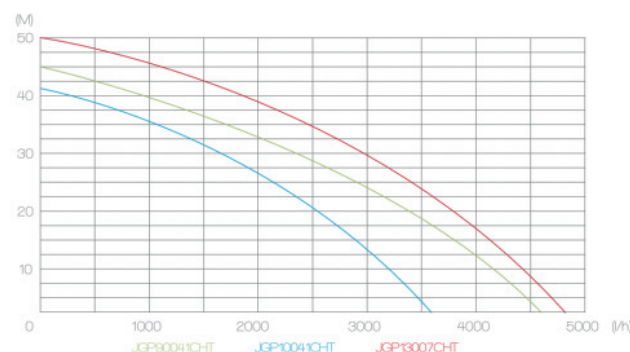

Specification

Junhe Model	JGP90041CHT PRO	JGP110041CHT PRO	JGP130041CHT PRO
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	48m	50m	58m
Max.flow rate	6800 l/h	7200 l/h	7800 l/h
Max.suction height	8m	8m	8m
Max.pressure	4.8bar	5.0bar	5.8bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	85	85	85
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	1PC	1PC	1PC
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x52cm	55x32x52cm	55x32x52cm
Single gross weight	14.5kg	15kg	15.5kg
Qty/20'GP	306pcs	306pcs	306pcs




Specification

Junhe Model	JGP9007DSINOX-3P	JGP11007DSINOX-4P	JGP13007DSINOX-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	35m	46m	55m
Max.flow rate	5400 l/h	5400 l/h	5400 l/h
Max.suction height	8m	8m	8m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	265pcs	265pcs	265pcs



JGPXXX7DS INOX-XP


Automatic booster system coupled with multi-stage impeller jet pump with stainless steel pump head and 24L stainless steel pressure tank.This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

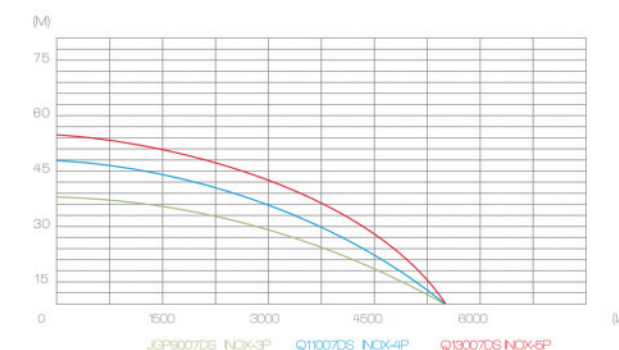



JGPXXX15D-XP

Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

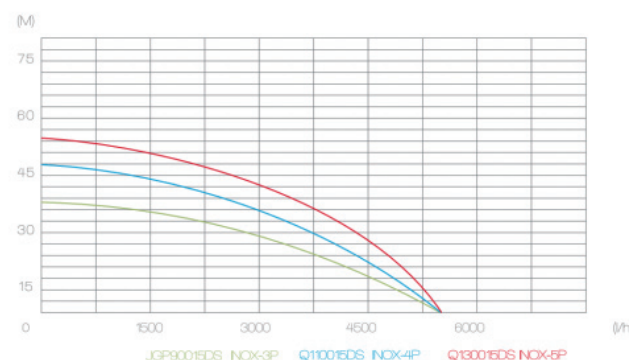

Specification

Junhe Model	JGP90015D-3P	JGP110015D-4P	JGP130015D-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	36m	48m	55m
Max.flow rate	5400 l/h	5400 l/h	5400 l/h
Max.suction height	8m	8m	8m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x67cm	55x32x67cm	55x32x67cm
Single gross weight	16kg	17.5kg	18kg
Qty/20'GP	237pcs	237pcs	237pcs




Specification

Junhe Model	CMP900D-3P	CMP1100D-4P	CMP1300D-5P
Rated Power	900W	1100W	1300W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	36m	48m	55m
Max.flow rate	6000 l/h	6000 l/h	6000 l/h
Max.suction height	1.5m	1.5m	1.5m
Max.pressure	1.5-3.0bar	1.5-3.0bar	1.5-3.0bar
Max.grain size	1mm	1mm	1mm
Max.Noise[dB]	80	80	80
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m	1m
Max.medium temperature	35°C	35°C	35°C
Qty of Impeller	3PCS	4PCS	5PCS
Pressure tank volume	24L	24L	24L
Single gift box size	55x32x60cm	55x32x60cm	55x32x60cm
Single gross weight	19kg	21kg	22kg
Qty/20'GP	265pcs	265pcs	265pcs




CMPXXXD-XP


Automatic booster system coupled with multi-stage impeller jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. It works very silent and reliable and particularly suitable to increase pressure from a water system.

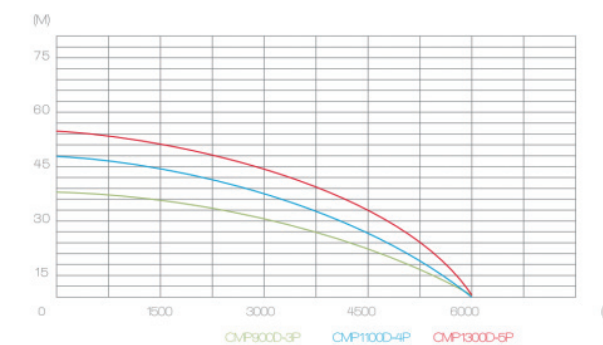

Automatic Booster System



Automatic booster system coupled with cast iron pump head jet pump and 24L carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge. With the injector this pump could reach a big suction height.

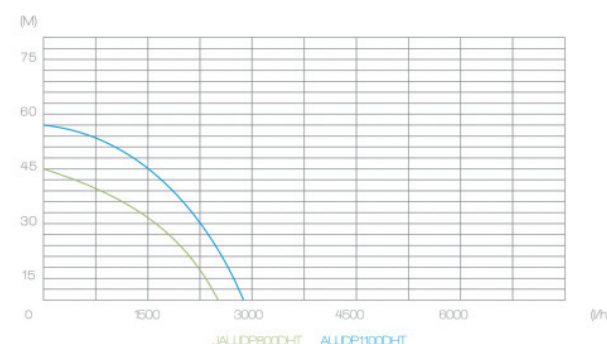


AUDJPXXXDHT



Specification

Junhe Model	AUJDP800DHT	AUJDP1000DHT
Rated Power	800W	1100W
Vol & Fre.	230V/50Hz	230V/50Hz
Max.Head	45m	56m
Max.flow rate	2400 l/h	2600 l/h
Max.suction height	20m	25m
Max.pressure	1.0-2.2bar	1.5-3.0bar
Max.grain size	1mm	1mm
Max.Noise[dB]	85	85
Dia of connecting pipe	G1"1 1/4"	G1", G1"1 1/4"
Cable specification	H07RN-F3G0.75mm ²	H07RN-F3G1.0mm ²
Length of cable	1m	1m
Max.medium temperature	35°C	35°C
Qty of Impeller	1PC	1PC
Pressure tank volume	24L	24L
Single gift box size	55x37x60cm	55x37x60cm
Single gross weight	22.4kg	23.9kg
Qty/20'GP	229pcs	229pcs

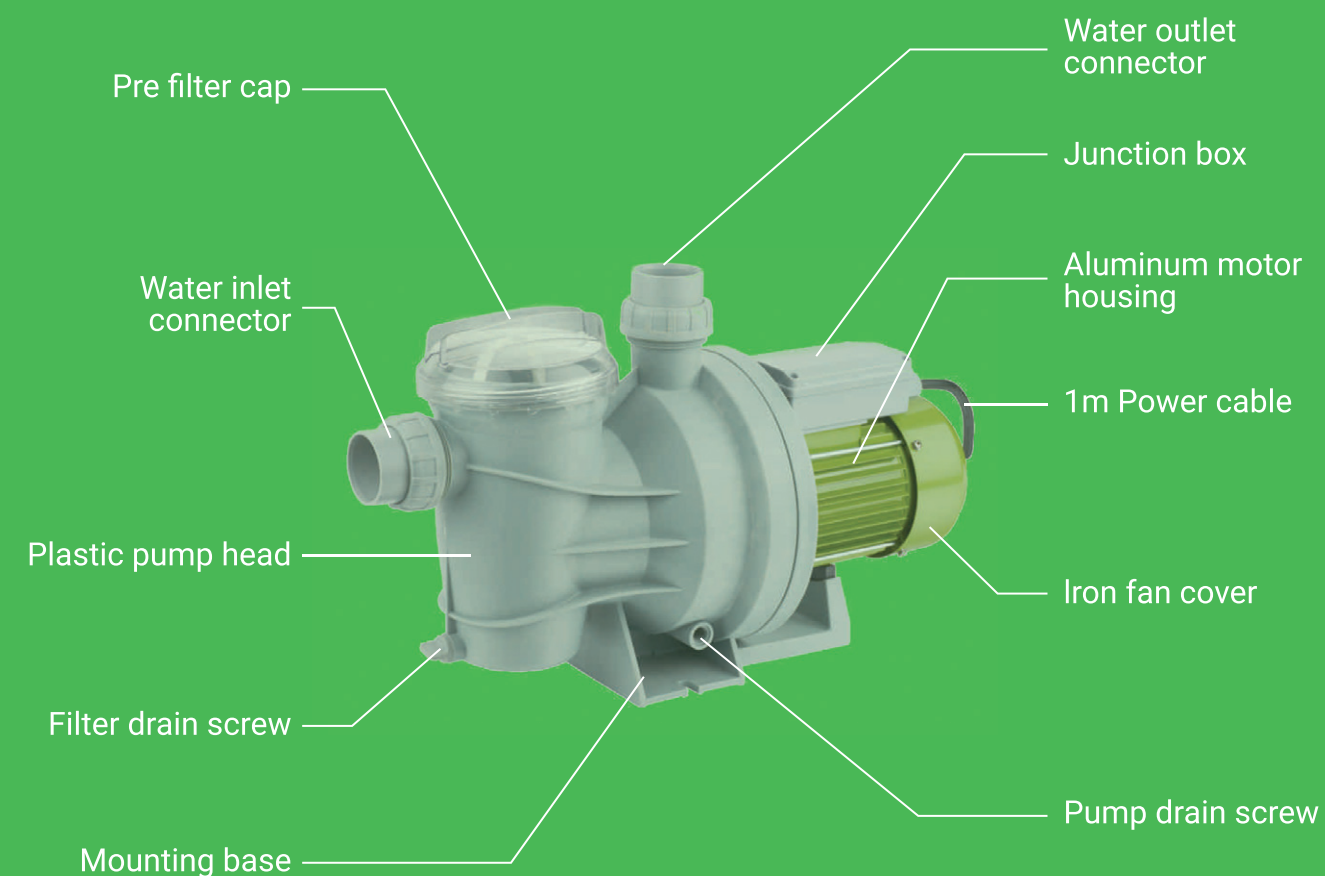


Swimming Pool Pump

Swimming pool pump with plastic pump head and built-in water filter for pool water application.

Swimming pool pump with plastic pump head and built-in water filter for pool water application. Aluminum motor housing and iron fancover is the most classic design for this pump. It works very silent and reliable and esay for installation and operation.



CLPXXX1

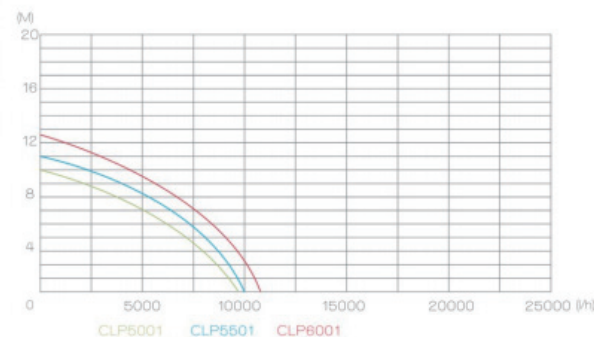

Specification

Junhe Model	CLP5001	CLP5501	CLP6001
Rated Power	500W	5500W	600W
Max.Head	10m	11m	12.5m
Max.flow rate	9000 l/h	10000 l/h	11000 l/h
Max.Pressure	1.0bar	1.1bar	1.25bar
Max.Noise(dB)	80	80	80
Dia of connecting pipe	G1-1/2"	G1-1/2"	G1-1/2"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Qty of Impeller	1PC	1PC	1PC
Single gift box size	45.5x23x27cm	45.5x23x27cm	45.5x23x27cm
Single gross weight	6.8kg	7.2kg	7.5kg
Qty/20'GP	990pcs	990pcs	990pcs



Specification


Junhe Model	CLP8005	CLP12005
Rated Power	800W	1200W
Max.Head	13.5m	16m
Max.flow rate	15000 l/h	23000 l/h
Max.Pressure	1.35bar	1.6bar
Max.Noise(dB)	80	80
Dia of connecting pipe	G2-1/4"	G2-1/4"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Qty of Impeller	1PC	1PC
Single gift box size	56x29.5x35.5cm	56x29.5x35.5cm
Single gross weight	10.4kg	12.4kg
Qty/20'GP	476pcs	476pcs



Swimming pool pump with plastic pump head and built-in water filter for pool water application. It works very silent and reliable and esay for installation and operation.It is the best selling swimming pool pump in Junhe.



CLPXXX5

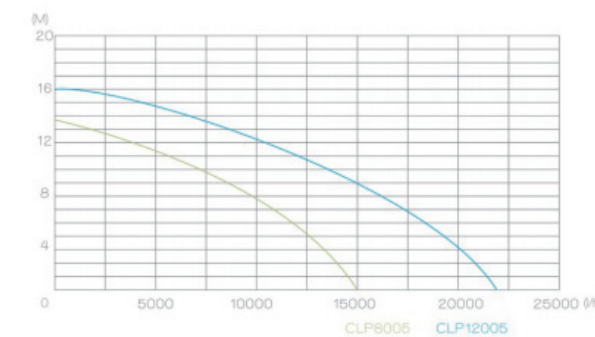

Deep Well Pump

Automatic booster system coupled with stainless steel pump head jet pump and large carbon steel pressure tank. This pump has equipped mechanical pressure control switch and pressure gauge.



MSPXXXAM12T

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water, It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well, With optimized pump specification and structure which makes this pump become more and more popular in European market.



Specification

Junhe Model	MSP750X6AM12T	MSP900X9AM12T	MSP1000X8AM12T
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500 l/h	4500 l/h	5200 l/h
Max.pressure	4.0bar	6.0bar	6.0bar
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	371mm	451mm	457mm
Lowest pump sucking level	160mm	160mm	160mm
Qty in carton box	2pcs	2pcs	2pcs
Master carton box size	58.3x37x24.5cm	64.5x37x24.5cm	65.5x37x24.5cm
Master carton box gross weight	25kg	25.5kg	27kg
Qty/20'GP	1058pcs	965pcs	950pcs



MSPXXXAM13T

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water, It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. With optimized pump specification and structure which makes this pump become more and more popular in European market.




Specification


Junhe Model	MSP750X6AM13T	MSP900X9AM13T	MSP1000X8AM13T
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500 l/h	4500 l/h	5200 l/h
Max.pressure	4.0bar	6.0bar	5.5bar
Dia of connecting pipe	G1-1/4"	G1-1/4"	G1-1/4"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	260mm	370mm	380mm
Lowest pump sucking level	70mm	70mm	70mm
Qty in carton box	1pcs	1pcs	1pcs
Master carton box size	69x23x17cm	77x23x17cm	79x23x17cm
Master carton box gross weight	12.5kg	13kg	13.5kg
Qty/20'GP	1038pcs	930pcs	906pcs



Deep Well Pump



Deep well pump with stainless steel pump body and multi-stage plastic impellers for clean water application. It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. This pump is additionally armed with the electrical pressure control switch to add more automatic functions, including: no water shut down, pressure maintaining / restarting and leakage shut down, which makes this pump become more and more popular in European market.

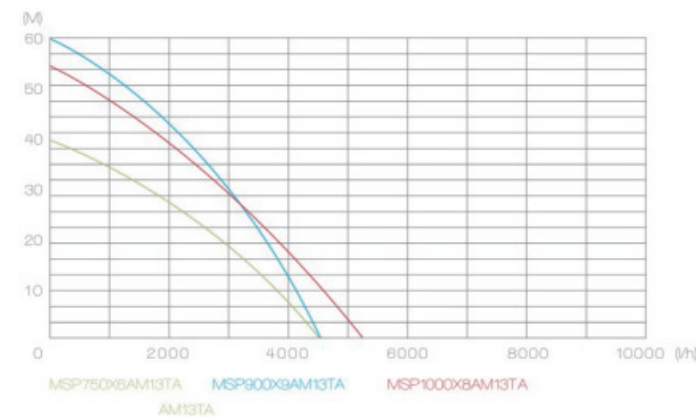

MSPXXXAM13TA

Specification

Junhe Model	MSP750X6AM13TA	MSP900X9AM13TA	MSP1000X8AM13TA
Rated Power	750W	900W	1000W
Max.pump height	40m	60m	55m
Max.pump rate	4500 l/h	4500 l/h	5200 l/h
Max.pressure	4.0bar	6.0bar	5.5bar
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	260mm	260mm	260mm
Lowest pump sucking level	70mm	70mm	70mm
Qty in carton box	1pcs	1pcs	1pcs
Master carton box size	93x37x26cm	101x37x26cm	101x37x26cm
Master carton box gross weight	11.5kg	12kg	12.5kg
Qty/20'GP	592pcs	544pcs	512pcs




MSPXXXAM02T

Specification

Junhe Model	MSP750X6AM02T	MSP900X9AM02T	MSP1000X8AM02T
Rated Power	750W	900W	1000W
Vol& Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.pump height	40m	60m	55m
Max.pump rate	4500 l/h	4500 l/h	5200 l/h
Max.submersible depth	16m	16m	16m
Max.grain size	1.5m	1.5m	1.5m
Max.pressure	4.0bar	6.0bar	5.5bar
Dia of connecting pipe	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Length of cable	20m	20m	20m
Lowest pump starting level	260mm	260mm	260mm
Lowest pump sucking level	70mm	70mm	70mm
Max,medium temperature	35°C	35°C	35°C
Qty in carton box	6pcs	9pcs	8pcs
Master carton box size	58.5x37x24.5cm/2pcs	64.5x37x24.5cm/2pcs	65.5x37x24.5cm/2pcs
Master carton box gross weight	25kg	25.5kg	27kg
Qty/20'GP	1058pcs	965pcs	950pcs

Deep well pump with stainless pump body and multi-stage plastic impellers for clean water. It has 20m length cable with plug and 20m nylon rope for lifting the pump up in a well. The control switch box has included over load protector and capacitor and on/off water proof switch. It is one of the best selling deep well pump in European DIY market.

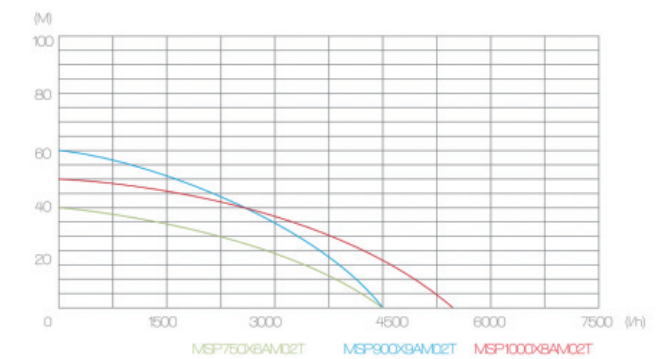



Vibration Pump


Vibration pump with complete aluminum pump housing for clean water application.

Specification			
Junhe Model	Q23040	Q28040	Q30040
Rated Power	230W	280W	300W
Max.pump height	45m	68m	55m
Max.pump rate	900 l/h	1020 l/h	1400 l/h
Max.pressure	4.5bar	6.8bar	5.5bar
Dia of connecting pipe	1/2"	1/2"	1/2"
Cable specification	H05RN-F3G0.75mm²	HH05RN-F3G0.75mm²	H05RN-F3G0.75mm²
Lowest pump starting level	300mm	300mm	300mm
Lowest pump sucking level	250mm	250mm	250mm
Qty in carton box	4pcs	4pcs	4pcs
Master carton box size	33x26x32cm	33x26x32cm	33x26x32cm
Master carton box gross weight	16.5kg	18kg	19.2kg
Qty/20'GP	4080pcs	4080pcs	4080pcs



QXXX40

Vibration pump with complete aluminum pump housing for clean water application.It is one of the best selling pump items for East European market,especially for Russia, We could also provide a choice of 20m/30m/40m length cable for your choice.

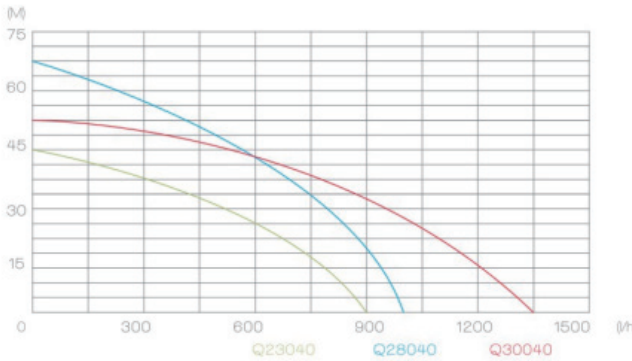



Aluminum Submersible Pump


Submersible pump with complete aluminum pump housing and floater switch for clean water application.

			
Specification			
Junhe Model	Q750153	Q1100153	Q1300153
Rated Power	750W	1100W	1300W
Max.pump height	16m	20m	30m
Max.pump rate	6000 l/h	7000 l/h	6000 l/h
Max.pressure	1.6bar	2.0bar	3.0bar
Dia of connecting pipe	1"G1"	1"G1"	1"G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	75mm	75mm	85mm
Lowest pump sucking level	35mm	35mm	40mm
Qty in carton box	1pc	1pc	1pc
Master carton box size	22x18x40cm	22x18x44cm	22x18x44cm
Master carton box gross weight	8.5kg	9.5kg	10kg
Qty/20'GP	1768pcs	1600pcs	1600pcs



QXXX153

Submersible pump with complete aluminum pump housing and floater switch for clean water application. There three top selling power available for this pump model, classic design and stable performance and competitive price, we believe it would become a very good selling product in Junhe.

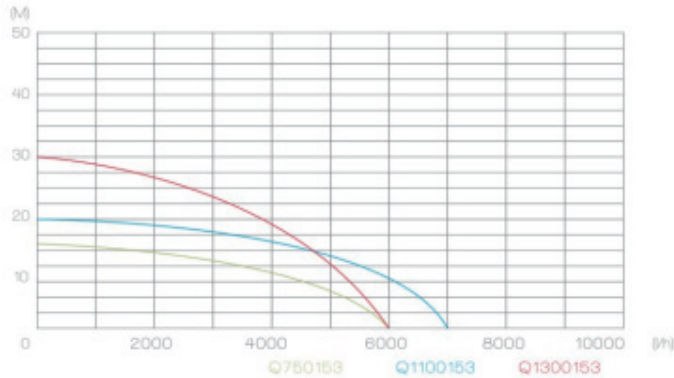


Aluminum Submersible Pump



QXXX161

Submersible pump with stainless steel pump body and cast iron pump base and castiron impeller and floater switch for dirty water application. This pump is the perfect choice for agricultural irrigation purpose. There are two best selling powers available for the moment.

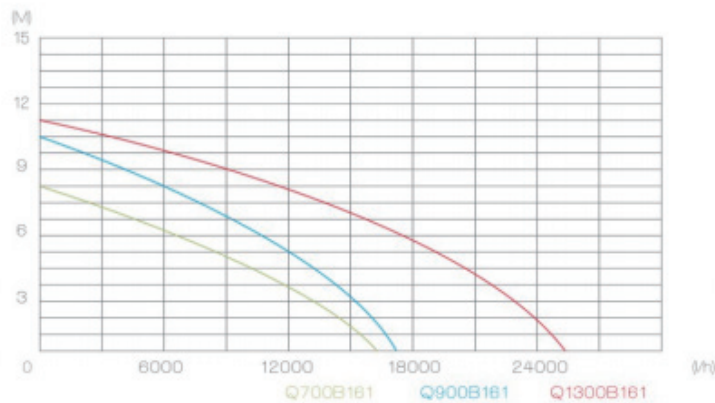

Specification

Junhe Model	Q700B161	Q900B161	Q1300B161
Rated Power	700W	900W	1300W
Max.pump height	8m	10m	11m
Max.pump rate	16000 l/h	17000 l/h	25000 l/h
Max.pressure	0.8bar	1.0bar	1.1bar
Dia of connecting pipe	G2"	G2"	G2"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Lowest pump starting level	150mm	150mm	150mm
Lowest pump sucking level	55mm	55mm	55mm
Qty in carton box	1pc	1pc	1pc
Master carton box size	35x27x55cm	35x27x55cm	35x27x55cm
Master carton box gross weight	12.5kg	14kg	16.7kg
Qty/20'GP	538pcs	538pcs	538pcs



Circulating pump


Circulating pump with cast iron pump head and aluminum motor housing for hot water system.



ZPB15-6-125



ZPB20-12S-250

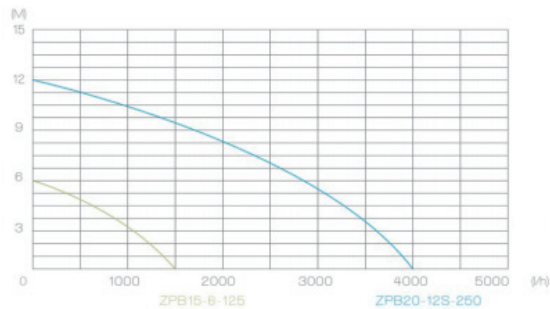

Circulating pump with cast iron pump head and aluminum motor housing for hot water system. It is one of the best selling items for East European market, especially for Russia.

Specification

Junhe Model	ZPB15-6-125	ZPB20-12S-250
Rated Power	125W	250W
Max.Head	6m	12m
Max.flow rate	1500 l/h	4000 l/h
Max.Pressure	0.6bar	1.2bar
Dia of connecting pipe	G3/4"	G1"
Cable specification	H05RN-F3G0.75mm ²	H05RN-F3G0.75mm ²
Qty of Impeller	8pcs	8pcs
Single gift box size	42x34x38cm	42x34x38cm
Single gross weight	22kg	26kg
Qty/20'GP	4120pcs	4120pcs



EDWC 2017

Electronic pressure control switch



AT-2B 4M

4M water suction hose



AT-4B 4M

4M water suction hose



AT-8 10M

10m*φ25mm PVC water delivery hose



AT-9 10M

10m*φ32mm PVC water delivery hose



AT-10 10M

10m*φ40mm PVC water delivery hose

Submersible floater switch



FS-JH-01 377C



FS-JH-02 377C



FS-JH-03 377C



FS-JH-04 377C




FS-JH-05 377C



FS-JH-06 377C

Pump Accessories



FS-JH-CW

Floater switch with count weight

Floater switch with 3mxH07RN-F3G1.0mm² and counter weight,you may make the cable length shorter or longer according to your order request,we also have total 6 options for the floater switch type for your choice.



FS-JH-01

Floater switch



FS-JH-02

Floater switch



FS-JH-03

Floater switch



FS-JH-04

Floater switch



FS-JH-05

Floater switch



FS-JH-06

Floater switch



WSC-1L

1L Water filter with dry-running protector



WSC-2L

2L Water filter with dry-running protector




HYWK-0402

Dry-running protector

Junhe Model	WSC-1L
Certificate Model	WSC-1
V&Hz	220V-240V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm ²
Length of cable	1.5m
Max.Pressure	8bar
Net.size	14×13×20cm
N.W	1.5kg/pcs
Protection type	IP×4

Junhe Model	WSC-2L
Certificate Model	WSC-2
V&Hz	220V-240V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm ²
Length of cable	1.5m
Max.Pressure	8bar
Net.size	14×13×20cm
N.W	1.5kg/pcs
Protection type	IP×4

Junhe Model	HYWK-0402
Certificate Model	HYWK-0402
V&Hz	110V-230V;50-60Hz
Current	10A
Cable	H07RN-F3G1.0mm ²
Length of cable	1.2m
Max.Pressure	0.6bar-6bar
Net.size	18×15×11cm
Qty in carton box	24pcs
Master carton box size	46×37×46cm
N.W/G.W	11kg/13kg
Qty/20'GP	9360pcs



FT-JH-01
Floater switch



FT-JH-02
Floater switch



PG-JH-01
Floater switch



PG-JH-02
Floater switch



NV-JH-01/02
Floater switch



BF-JH-01/02
Floater switch



AT-1
7m Water suction hose

- Inner diameter: 1"(Φ25mm)
- Max.pressure:6bar
- Working temperature:1-35°C

AT-1

AT-2



AT-2
7m Water suction hose

- Inner diameter: 1"(Φ25mm)
- Max.pressure:6bar
- Working temperature:1-35°C



AT-3
7m Water suction hose

- Inner diameter: 3/4"(Φ19mm)
- Max.pressure:6bar
- Working temperature:1-35°C

AT-3

AT-4



AT-4
7m Water suction hose


- Inner diameter: 1"(Φ25mm)
- Max.pressure:6bar
- Working temperature:1-35°C



AT-5
7m Water suction hose

- Inner diameter: 1"(Φ25mm)
- Max.pressure:6bar
- Working temperature:1-35°C

AT-5



PC-JH-01



PC-JH-01
Power cable

- H05RN3G0.75MM
- H05RN3G1.0MM
- H07RN3G1.0MM
- H07RN4G1.0MM
- 10m

PC-JH-02

Power cable

- H05RN3G0.75MM
- H05RN3G1.0MM
- H07RN3G1.0MM
- H07RN4G1.0MM
- 20m

PC-JH-02

EDWC2013



EDWC2013

Electronic pressure control switch

- 220~240V/50-60HZ
- Max.1Mpa[10bar]
- Max.10A
- Max.60°C
- IP65

SC-HY1L

1L water filter



- 1L
- 15x13x19.5cm
- 54x47x41cm/24pcs
- 16kg/19kg
- QTY/20'CTN: 6460pcs

SC-HY1L

SC-HY2L



SC-HY2L

2L water filter

- 2L
- G1"
- 15x13x29.5cm
- 49x29x61cm/12pcs
- 10kg/13kg
- QTY/20'CTN: 3880pcs



CT-JH-01

19L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure:1.8-2.0bar
- Volume:19L
- Max.working pressure:6.0bar
- Tmax.:45°C



CT-JH-02

19L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure:1.8-2.0bar
- Volume:19L
- Max.working pressure:6.0bar
- Tmax.:45°C



CT-JH-03

24L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure:1.8-2.0bar
- Volume:24L
- Max.working pressure:6.0bar
- Tmax.:45°C



CT-JH-04

24L carbon steel pressure tank with plastic platform and feet.


- Inflation pressure:1.8-2.0bar
- Volume:24L
- Max.working pressure:6.0bar
- Tmax.:45°C



CT-JH-05

50L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure:1.8-2.0bar
- Volume:50L
- Max.working pressure:6.0bar
- Tmax.:45°C



ST-JH-01

19L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure: 1.8-2.0bar
- Volume: 19L
- Max. working pressure: 6.0bar
- Tmax.: 45°C



ST-JH-02

24L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure: 1.8-2.0bar
- Volume: 24L
- Max. working pressure: 6.0bar
- Tmax.: 45°C



ST-JH-03

24L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure: 1.8-2.0bar
- Volume: 24L
- Max. working pressure: 6.0bar
- Tmax.: 45°C



ST-JH-04

50L carbon steel pressure tank with plastic platform and feet.

- Inflation pressure: 1.8-2.0bar
- Volume: 50L
- Max. working pressure: 6.0bar
- Tmax.: 45°C



SC-HY2L · Drill Pump

- Max. height: 2.5m
- Max. surking height: 1m
- Dia. of pipe: NPT 3/4
- 49x29x61cm/12pcs
- 57.5x40x39/12pcs [20' CTN: 39500pcs]
- 40.5x30x15.5/12pcs (20' CTN: 19140pcs)



MS-JH-01 (Male Thread)

Mechanical pressure switch

- V&Hz : 250V/50Hz
- Working pressure: 1.3-2.6bar / 1.5-3.0bar
- Protection grade : IP44



MS-JH-02 (Female Thread)

Mechanical pressure switch

- V&Hz : 250V/50Hz
- Working pressure: 1.3-2.6bar / 1.5-3.0bar
- Protection grade : IP44



TM-JH-01

19L pressure tank membrane

- Material : EPDM
- Volume : 19L



TM-JH-02

24L pressure tank membrane

- Material : EPDM
- Volume : 24L



TM-JH-03

50L pressure tank membrane

- Material : EPDM
- Volume : 50L



Latest
Products



Q400206A

POOL COVER PUMP

- Compact&portable design, easy to carry.
- Automatic on/off switch.
- PP glass-fber handle fame retardant housing PP glass-fber base.
- 3/4" corrosion resistant plastic drain, fits any standard garden hose.
- 1 inch starting water level, 1/2 inch stopping water level, wide application scenarios.
- Copper wire motor, UL Listed.

Specification

Junhe Model	Q1/4HP206	Q400206A
Rated Power	1/4HP	400W
Vol&Fre.	110-120V/60HZ	230V/50HZ
Max.Pump Height	25FT	7.6M
Max.Pump Rate	1800GPH	7000L/H
Max.Grain Size	1/5 INCH	5mm
Lowest pump starting level	1 INCH	25.4mm
Lowest pump sucking level	1/2 INCH	12.7mm




01/6HP203

UTILITY SUBMERSIBLE PUMP

- Stainless steel handle.
- Aluminum alloy motor shell, plastic-sprayed pump housing, strong corrosion resistance.
- Compact structure,oil-cooled motor, long continuous working time.
- The special materia base for high tensile strength and stability.
- 2000H endurance life time in clean water condition.
- Copper wire motor, UL Listed.

Junhe Model	Q1/6HP203
Rated Power	1/6HP
Vol&Fre.	110-120V/60HZ
Max.Pump Height	26FT
Max.Pump Rate	1600GPH
Max.Grain Size	1/5 INCH
Lowest pump starting level	1 INCH
Lowest pump sucking level	1/5 INCH



QXXXB217

SEWAGE PUMP

- Plastic shell has corrosion resistance.
- Good sealing effect.
- Large distance between the impeller and the base, good sewage discharge , anti-blocking.
- 3000H endurance life time.

Specification

Junhe Model	Q1600B217M	Q2000B217M
Rated Power	1600W	2000W
Vol&Fre.	230V/50HZ	230V/50HZ
Max.Pump Height	13m	15m
Max.Pump Rate	23000L/H	28000L/H
Max.Grain Size	40mm	40mm



QXXX210



SUBMERSIBLE WATER PUMP

- Compact&portable design, easy to clean.
- Stainless steel about exposed screws.
- PA impeller.
- Moveable handle'save storage space.



Junhe Model	Q400B210	Q400B210
Rated Power	400W	400W
Vol&Fre.	230V/50HZ	230V/50HZ
Max.Pump Height	8m	5m
Max.Pump Rate	8000L/H	9500L/H
Max.Grain Size	3mm	15mm



DCJ1502

DC GARDEN PUMP

- Novel appearance,compact&portable design,easy to carry.
- Standard water pipe connector can match a variety of nozzles.
- Built-in-filter, easy clean.
- Customized battery platform available.
- Built-in circuit board, high and low modes can be selected freely.
- The indicator light is distinct to see, which can show the power situation.
- Overload protection.

Junhe Model	DCJ1502
Rated Power	180W
Battery Capacity	18V/4AH
Max.Pump Height	22m
Max.Pump Rate	2800L/H
Max.Pressure	2.2Bar
Max.Grain Size	0.5 mm
Continuous working Time	30 min




Q800B205

SHREDDER PUMP

- Stainless steel sleeve shell, equipped with float switch, can start and stop automatically.
- Oil-immersed mechanical seal, long endurance life time.
- Efficient cutting blade.
- CE certified.

Junhe Model	Q800B205
Rated Power	800W
Vol/Fre.	220-240V/50HZ
Max.Pump Height	10m
Max.Pump Rate	16400L/H
Max.Submersible Depth	7M
Continuous working Time	2000H



DC RAIN WATER PUMP

- Compact&portable design,easy to carry.
- 18V battery pack guarantees, long continuous working time.
- Standard water pipe connector can match a variety of nozzles.
- With its telescopic pipe, the height of pump can be adjusted freely.
- Patented sealing structure.
- Aluminum alloy motor shell.
- The battery box is designed easy to hang and carry, customized battery platform available.
- Built-in PCB board, high-low voltage and current protection.



DCQ807

Junhe Model	Q800B205
Rated Power	80W
Battery Capacity	18V/4AH
Max.Pump Height	17.5m
Max.Pump Rate	1800L/H
Max.Grain Size	0.5mm
Continuous Working Time	45 min
Endurance Life Time	300H



PCT403T

DC POOL VACUUM CLEANER

- Compact&portable design,easy to carry.
- Detachable handle and dirt suction tray.
- Optional extension rod, length up to 0.7-1.5m.
- The socket hole is covered by the switch, hence waterproof. The external charger wire is 1.2m long.
- Locked rotor, over-voltage, short circuit and low voltage protection.

Junhe Model	PCT403T
Rated Power	40W
Battery Capacity	18V/2000mAH
Max.Flow Rate	4200L/H
Max.Grain Size	25mm
Continuous working Time	60 min
Battery Charging Time	90 min
Endurance Life Time	300H



CLP4002F

SAND FILTER PUMP

- UV resistance.
- Function:Filtration, back-washing, fushing, wastewater, circulation, shutdown, anti-freeze.
- Detachable pump base and barrel base.
- 2000H endurance life time.

Junhe Model	Q800B205
Rated Power	400W
Vol/Fre.	230V/50HZ
Max.Pump Height	10.5m
Max.Pump Rate	10450L/H
Max.Grain Size	2.5 mm
Endurance Life Time	2000H



DCQ802

DC BILGE PUMP

- Compact&portable design,easy to carry.
- Base can be detachable and cleaned easily.
- Long continuous working time.
- ABS shell, stainless steel motor shaft.
- Suitable for 12V/24V power supply.
- Overload protection

Junhe Model	DCQ802
Rated Power	80W
Max.Pump Height	5m
Max.Pump Rate	4000L/H
Max.Pressure	0.5Bar
Max.Grain Size	3.5mm

DC RAIN WATER PUMP I

- Compact&portable design, easy to carry.
- Replaceable battery pack.
- The elbow enables the pump to be hung on a variety of supports.
- With its telescopic pipe, the height of pump can be adjusted freely.
- Standard water pipe connector can match a variety of nozzles.
- Built-in PCB board, overload protection.

Junhe Model	DCQ501
Rated Power	50W
Battery Capacity	12V/2AH
Max.Pump Height	11m
Max.Pump Rate	1500L/H
Max.Pressure	1.1Bar
Max.Grain Size	0.5 mm
Continuous working Time	30 min



DCQ501


POND CLEANER

- Wide clearing range, remove all pond debris, leaves, stones, weeds, and sludge.
- Fast working, 4 times faster than a pond vacuum cleaner.
- Continuous water discharge, fast and powerful.
- Adjustable handle and cable free control.
- With buoyancy assisting, easy to operate.
- Recyclable: Recycle water to pond or garden, recycle waste to compost.



PCT3501T

Junhe Model	PCT3501T
Rated Power	350W
Vol&Fre.	230V/50Hz
Max.Pump Rate	8000L/H
Max.Grain Size	32mm
Max.Submersible Depth	5m



QXXXB237M



Specification


Junhe Model	Q300B237M	Q550B237M	Q750B237M	Q900B237M
Rated Power	300W	550W	750W	900W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	6m	8m	10m	11m
Max.flow	10000 l/h	16000 l/h	20000 l/h	24000 l/h
Max.grain size	1mm	1mm	1mm	1mm
Outlet	1G1"1-1/4"G1-1/2"	1G1"1-1/4"G1-1/2"	1G1"1-1/4"G1-1/2"	1G1"1-1/4"G1-1/2"
Cable specification	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO5RN-F3G0.75mm ²	HO7RN-F3G1.0mm ²
Protection class	IPX8	IPX8	IPX8	IPX8
Max.medium temperature	35°C	35°C	35°C	35°C
Net weight	3.97kg	4.72kg	5.36kg	6.65kg
Starting water level	80mm	82mm	82mm	84mm
Residual water level	38.5mm	38.5mm	38.5mm	38.5mm



DCQ9015

Junhe Model	DCQ9015
Rated Power	90W
Vol & Fre.	18V/4AH
Max.Head	8m
Max.flow	5000 l/h
Max. submersible depth	1m
Max.grain size	5mm
Continuous working time	40mins (Boost); 60mins (Eco)
Battery charging time	3 hours
Outlet	G1"
Protection class	IPX8
Max.medium temperature	35°C
Net weight	2.8kg
Starting water level	5mm
Residual water level	1mm





Junhe Model	Q750B224A
Rated Power	750W
Vol & Fre.	220-240V/50Hz
Max.Head	8.5m
Max.flow	17000 l/h
Max. submersible depth	7m
Max.grain size	35mm
Cable specification	H05RN-F3G0.75mm ²
Outlet	G1-1/2"
Protection class	IPX8
Max.liquid temperature	35°C
Net weight	4.8kg
Starting water level	100mm
Residual water level	42mm

Q750B224A



JGPXXX62C

Specification

Junhe Model	JGP90062C	JGP110062C	JGP130062C
Rated Power	900W	1100W	1300W
Vol & Fre.	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Max.Head	44m	48m	53m
Max.flow	5400 l/h	5500 l/h	6000 l/h
Max. Suction Height	8m	8m	8m
Outlet/Inlet	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35°C	35°C	35°C
Net weight	12.8kg	13.4kg	14kg
Tank volume	24L	24L	24L

Specification

Junhe Model	JPG40063C	JPG60063C	JPG80063C
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	36m	43m
Max.flow	3600 l/h	4600 l/h	5000 l/h
Max. Suction Height	8m	8m	8m
Outlet/Inlet	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35°C	35°C	35°C
Net weight	10kg	12.4kg	10.4kg
Tank volume	19L	19L	19L



JGPXXX63C



JGPXXX64C

Specification

Junhe Model	JGP40064C	JGP60064C	JGP80064C
Rated Power	400W	600W	800W
Vol & Fre.	230V/50Hz	230V/50Hz	230V/50Hz
Max.Head	30m	36m	43m
Max.flow	3600 l/h	4600 l/h	5000 l/h
Max. Suction Height	8m	8m	8m
Outlet/Inlet	G1"	G1"	G1"
Cable specification	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²	H07RN-F3G1.0mm ²
Protection class	IPX4	IPX4	IPX4
Max.liquid temperature	35°C	35°C	35°C
Net weight	10kg	10.2kg	10.4kg
Tank volume	19L	19L	19L